

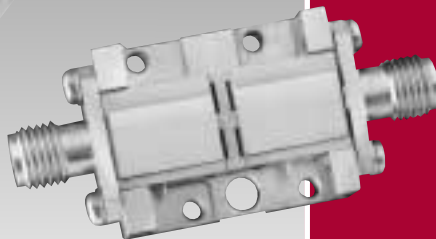




FREQUENCY MULTIPLIERS

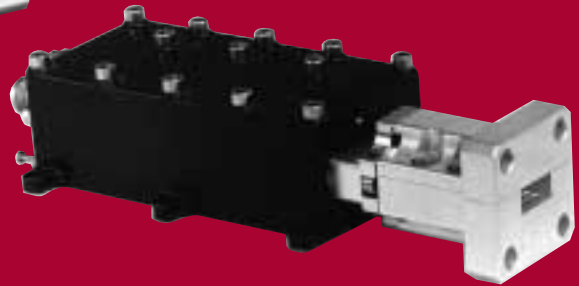

PASSIVE AND ACTIVE

- Doublers
- Triplers
- Higher-Order Products

TABLE OF CONTENTS

| CONTENTS | PAGE |
|---|------|
| INTRODUCTION | 2 |
| TECHNICAL OVERVIEW | 2 |
| Technical Discussion | 3 |
| Design Example | 4 |
| Specification Definitions | 4 |
| Defining Multiplier Terms | 5 |
| Typical Block Diagrams | 5 |
| Specifications and Typical Values | 7 |
| General Specifications | 7 |
| Percentage Bandwidth, Rejection and Size | 7 |
| Frequency Multipliers | 8 |
| APPLICATION NOTES | |
| Common Applications | 8 |
| SHORT-FORM LISTING | |
| Passive Frequency Doublers | 9 |
| Active Frequency Doublers | 10 |
| Active Frequency Triplers | 11 |
| Higher-Order Active Multipliers | 12 |
| DETAILED DATA SHEETS | |
| Passive Frequency Doublers | |
| MX2M020040 | 15 |
| MX2M040080 | 16 |
| MX2M080160 | 17 |
| MX2M130260 | 18 |
| MX2M260400 | 19 |
| MX2M004010 | 20 |
| MX2M010060 | 21 |
| MX2M030180 | 22 |
| MX2M060260 | 23 |

| CONTENTS | PAGE |
|--|------|
| Active Frequency Doublers | |
| MAX2M020040 | 24 |
| MAX2M040080 | 25 |
| MAX2M080160 | 26 |
| MAX2M130260 | 27 |
| MAX2M200400 | 28 |
| MAX2M260400 | 29 |
| MAX2M260400 (Waveguide WR28 Output) | 30 |
| MAX2M300500 | 31 |
| MAX2M360500 | 32 |
| MAX2M010060 | 33 |
| MAX2M030180 | 34 |
| MAX2M060260 | 35 |
| HIGHER-ORDER ACTIVE MULTIPLIER ASSEMBLIES | |
| X 3 | 36 |
| X 4 | 37 |
| X 5 | 39 |
| X 5 (Hermetic Product) | 40 |
| X 6 | 41 |
| X 16 | 42 |
| X 32 | 44 |
| OUTLINE DRAWINGS | |
| Passive Multipliers | 45 |
| Active Multipliers | 47 |
| GENERAL INFORMATION | |
| Warranty | 52 |
| Fax-Back Page | 53 |
| Additional Products | 54 |

INTRODUCTION

This catalog is intended to provide an overview of MITEQ's passive and active multiplier capabilities. Within this catalog you will find a variety of standard designs which will meet typical applications. However, MITEQ maintains dedicated engineering resources to modify these standard designs in support of custom-generated specifications that are typically required in stringent system applications. These critical requirements often require high spectral purity. MITEQ can obtain high levels of fundamental and spurious signal

suppression as required in many frequency source applications, by employing special filter technologies.

In addition to custom-filter designs, MITEQ also has advanced amplifier technologies which, when combined with balanced multiplier designs, offer high performance active multipliers, especially in the areas of shaped frequency response and desired output levels.

TECHNICAL OVERVIEW

Most of MITEQ's frequency multiplier designs perform to specific customer requirements and can easily be categorized into standard products. Parameters such as frequency range, bandwidth, spurious rejection and multiplication ratios are normally determined by specific system requirements. These requirements, in turn, translate into custom-designed filter and amplifier specifications at the multiplier design level.

In most frequency multiplier designs, the multiplier output contains, besides the desired harmonic output, unwanted signals. These unwanted signals consist of the fundamental input signal leakage, and lower-order and higher-order harmonics generated in the multiplier. Quite often, with odd-order multipliers, the undesired signals are higher in level than the desired signal. In even-order multipliers, the undesired outputs are normally 10 to 20 dB below the desired output. Thus, the output signals can be amplified before the output is filtered. This is not possible with odd-order multipliers because the unwanted signals will cause the amplifier to saturate and suppress the desired output. The easiest to characterize as standard products are the frequency doublers, because of their wide bandwidth and relatively high rejection to input harmonics.

For these reasons, the frequency doubler section of the product line offers more standard models than the higher-order frequency multipliers.

Definitions of key performance parameters vary from manufacturer to manufacturer. Some of the variations are minor, while others can lead to misinterpretations of specifications. In order to avoid that problem and facilitate the use of this catalog, we have supplied a technical discussion for our series of passive and active multipliers.

TECHNICAL DISCUSSION

MULTIPLIER LOSSES

MITEQ's multipliers are formed by cascading a passive multiplier with a bandpass filter and an active device, such as an amplifier.


The basic multiplier losses of MITEQ's passive multipliers are listed below;

| | |
|--------------------|---------------|
| times two (X 2): | 12 dB typical |
| times three (X 3): | 15 dB typical |
| times four (X 4): | 22 dB typical |
| times five (X 5): | 23 dB typical |

Multipliers of higher orders are formed by cascading these basic blocks. The most common higher-order multiplier used for MITEQ's systems applications is the times six, which is formed with the cascade of times two and times three. MITEQ manufactures C-band through Ku-band multipliers with built-in comb bandpass filters, MMIC amplifiers and higher-order assemblies that include various combinations of even- and odd-harmonic multipliers.

PHASE NOISE

MITEQ multipliers add phase noise to a lower frequency source by approximately $20 \times \log [N] + 3$ dB, where N is the multiplication factor. If spurious products are present on an incoming signal, they increase in level by this factor. Below is a visual representation of this phenomenon;

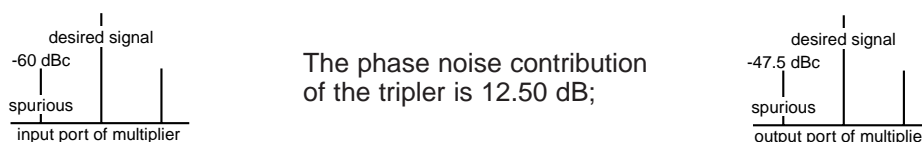

The method of measuring the phase noise contribution is referred to as a residual phase noise measurement and requires three multipliers (three measurements with two multipliers each), so that the source noise is cancelled. At present, all of our multipliers have not been thoroughly characterized for phase noise contribution.

SPURIOUS AND HARMONIC REJECTION

The concepts of harmonic rejection and spurious rejection are very important in the manufacture of multipliers. An important tool in the design process relates to the spurious-free bandwidth, which can be mathematically calculated from the relation;

$$[N + 1] / N < = [\text{upper frequency limit} / \text{lower frequency limit}]$$

where N is the multiplication factor.

For a tripler, this ratio becomes $4/3 = 1.333$. A tripler whose output is 4 to 8 GHz wide has in-band spurious outputs that are not filtered because $8/4 = 2$, which exceeds the spurious-free bandwidth ratio.

With regard to spurious rejection, it makes a difference over what output region the rejection is required. Generally, MITEQ produces multipliers with -65 dBc minimum spurious rejection, not only in the output passband, but also outside the desired passband from (1 to 18 GHz). Spurious outputs take three basic forms.

CASE 1. The spurs are not harmonically related to the input, and are called nonharmonically-related spurs [not related to N at all].

CASE 2. The spurs are related somehow to the input, or multiples of it, and are called harmonically-related spurious. [N + 1, N - 1, N + 2, etc.].

CASE 3. The spurs are related to multiples of the output and are referred to as output harmonics [N, 3N, 4N, etc.].

At MITEQ, we refer to the first two cases under the general term spurious rejection, and to case three by the term output harmonics. Rejection to output harmonics for the vast majority of MITEQ multipliers lies between -20 and -15 dBc. The reason for this is because those multipliers that require amplification, usually employ an amplifier that is run in a saturated mode to minimize output power variations versus temperature.

This leads to a key design concept about properly assessing the choice of multiplication factor, and more importantly, how much rejection is required to meet your overall system requirements. The multiplier can be used as part of a synthesizer or source that feeds one port of a mixer. When the spurs of the multiplier enter the mixer, they mix with the RF and its harmonics to produce various unwanted signals that cannot be filtered in the IF passband.

DESIGN EXAMPLE

Your system requires a multiplier output from 8.6 to 10.5 GHz. Due to the available input frequencies, it is determined that the multiplication factor is six times. This is best accomplished by cascading a times three and a times two multiplier.

The input required for the tripler will be 1433 to 1750 MHz.

Multiples of the input, present at the output are:

| | |
|-----|---------------------------|
| X 2 | 2866 – 3500 MHz |
| X 3 | 4299 – 5250 MHz [desired] |
| X 4 | 5732 – 7000 MHz |
| X 5 | 7165 – 8750 MHz etc... |

Suppose that the times five spectral component at the output is not suppressed properly. If your system specification is -70 dBc spurious, for example, and the N + 2 product is only suppressed by -58 dBc, the times six chain will not meet specification, because the next doubler will not provide any additional suppression. This product is an in-band spurious because anything from 8600 to 10500 MHz is in-band.

Suppose, next, that the N + 1 product of the tripler is not suppressed -70 dBc. The desired input to the doubler is 4299 to 5250 MHz, but we also have an input from 5732 to 7000 MHz that was not adequately suppressed. Therefore, we will observe an undesired output from the doubler at the following frequency;

| | |
|-------|--|
| N + 1 | 5732 – 7000 MHz |
| N | 4299 – 5250 MHz, the difference product is 1433 – 1750 MHz |

Since our desired output is 8600 to 10500 MHz, the difference product maps into the region (8600 to 10500 MHz) + (1433 to 1750 MHz) and the result is 10033 to 12250 MHz, which is an undesired product, from at least the 10033 to 10500 MHz region of the desired output passband.

The point of this example is to show that when a multiplier system is designed from cascaded multipliers, potential problems exist if you buy the individual multipliers separately from MITEQ, and do not take into account all the multiples and their products formed at various stages. MITEQ provides custom-designed higher-order multipliers that will not suffer from these effects.

SPECIFICATION DEFINITIONS

PASSIVE MULTIPLIERS

CONVERSION LOSS (also known as multiplier loss)

This is the attenuation in dB between the input level and the output level.

HARMONIC REJECTION

The difference in dB between the desired harmonic and the unwanted harmonic as viewed at the multiplier output port. When the unwanted harmonic is the fundamental itself, then the difference is the fundamental rejection.

ACTIVE MULTIPLIERS

CONVERSION GAIN

The net increase in power between the fundamental input signal and the desired output. It is usually expressed as a positive ratio in dB.

SPURIOUS REJECTION

The difference in dB between the desired output harmonic and any other harmonic as viewed at the multiplier's output. The spurs can be multiples of the input frequency.

OUTPUT HARMONIC REJECTION

The difference in dB between the desired output and harmonics of the output frequency.

COMMON DEFINITIONS FOR BOTH PASSIVE AND ACTIVE MULTIPLIERS

OUTPUT POWER FLATNESS

The maximum power variation in dB over a specified frequency and at a specific temperature.

INPUT POWER

The level in dBm as measured at the multiplier's input port.


OUTPUT POWER

The level in dBm as measured at the output port of the multiplier.

OPERATING TEMPERATURE

The temperature range at which the device meets the specified electrical parameters. The temperature is defined as the base plate temperature of the device.

DEFINING MULTIPLIER TERMS

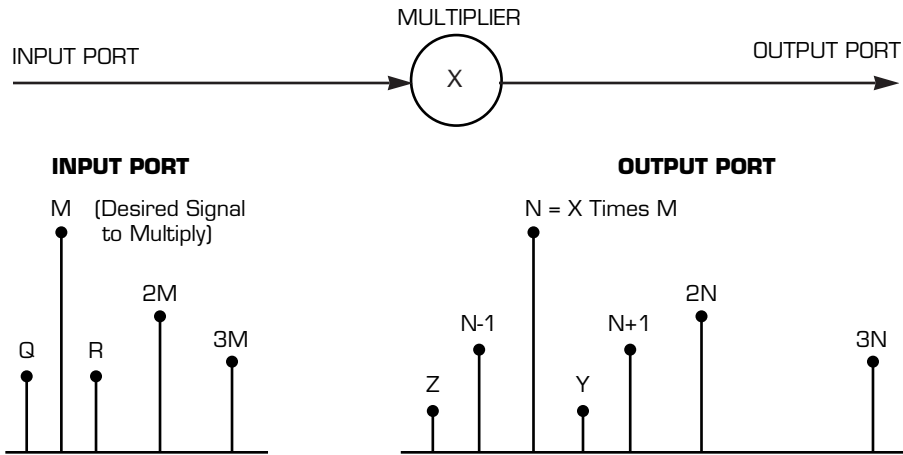


Input harmonics feeding multiplier = $2M, 3M$
 Spurious feeding multiplier = Q, R

Output harmonics from multiplier = $2N, 3N$
 Input harmonic rejection (products generated in the multiplier) = $N + 1, N - 1$ related to the input
 Spurious rejection = Y, Z


TYPICAL BLOCK DIAGRAMS

The basic use of frequency multipliers is to extend the output frequency range or bandwidth of a source by multiplying that frequency by a given multiplication factor, i.e., twice the fundamental of a 5 to 10 GHz source would yield a 10 to 20 GHz output. The following block diagrams represent but a small sampling of the uses for both passive and active multipliers.

PASSIVE MULTIPLIERS

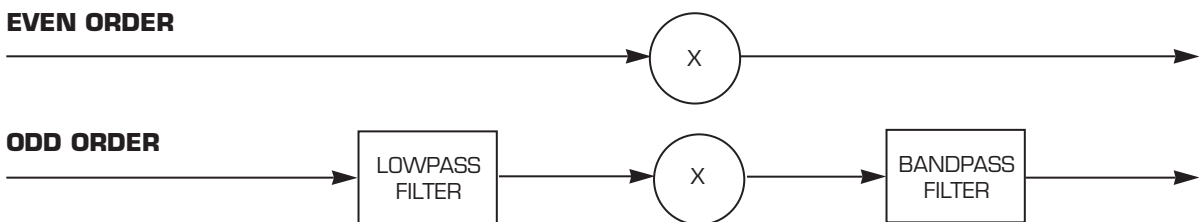


ACTIVE MULTIPLIERS

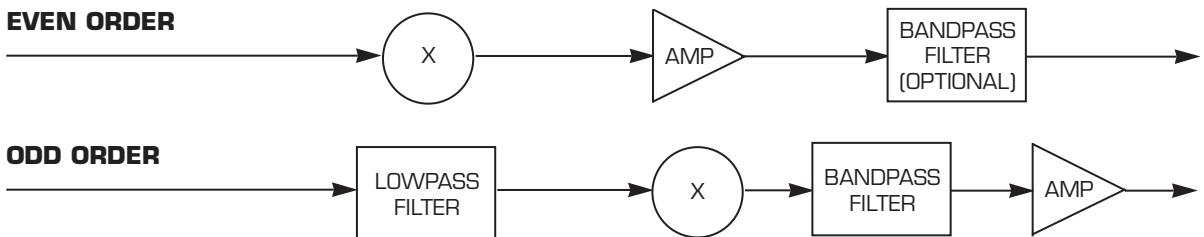


TYPICAL BLOCK DIAGRAMS (CONT.)

TIMES 2 MULTIPLIER WITH SOURCE

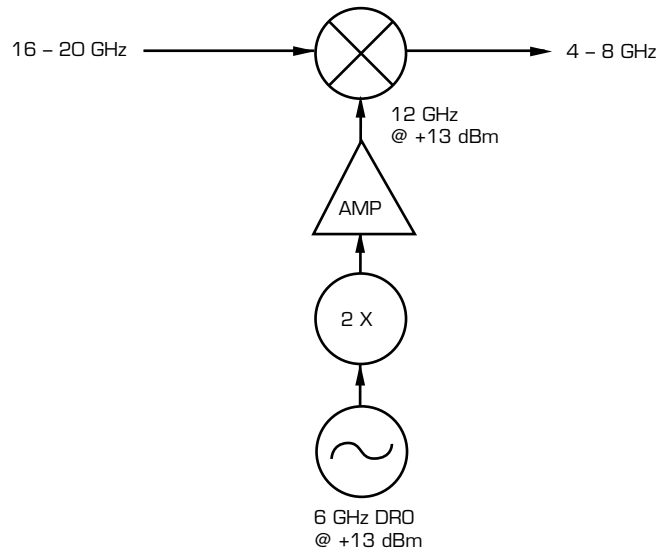

SUBSYSTEM WITH MULTIPLIERS

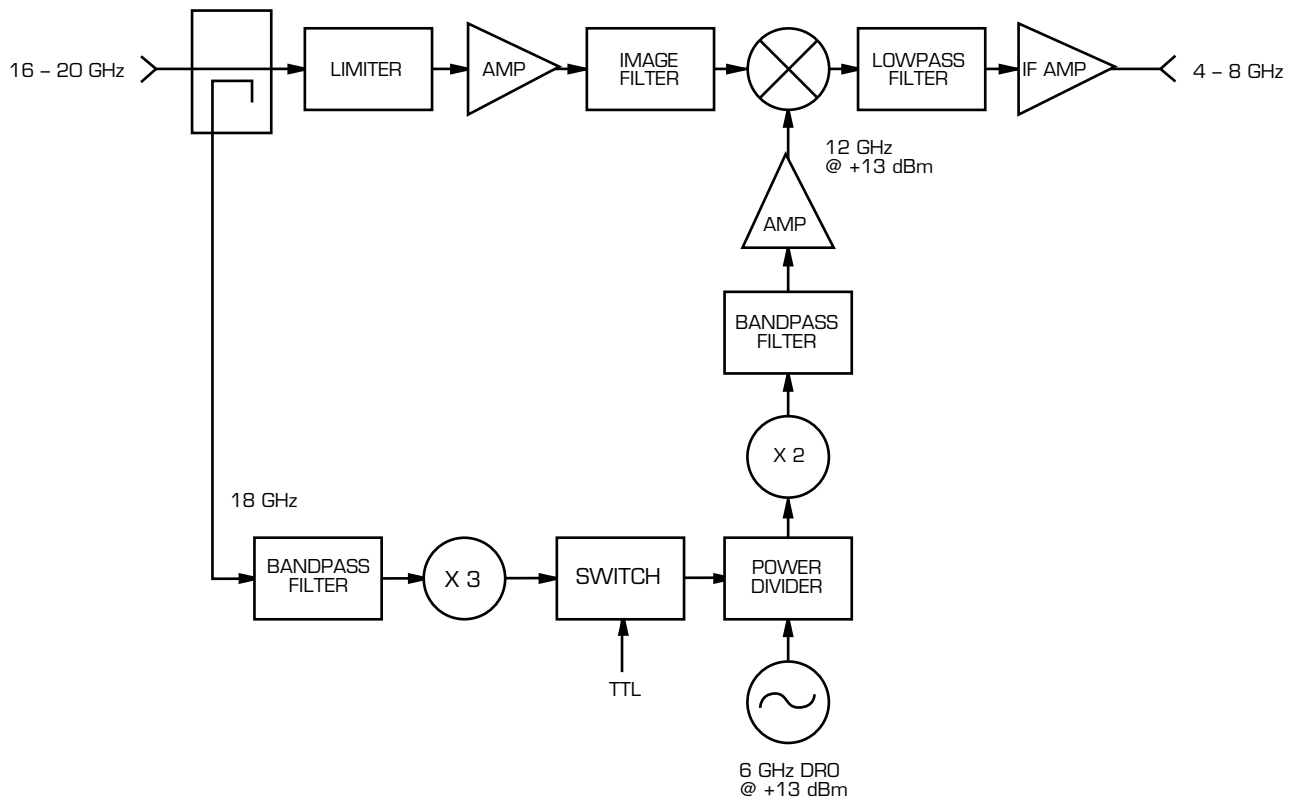

SPECIFICATIONS AND TYPICAL VALUES

One very common problem MITEQ's customers face when purchasing multipliers is not knowing what specifications are practically realizable, and also not appreciating that overspecification causes large, bulky and expensive products. This can be overcome by using some practical values established here as a reference:

| SPECIFICATION | TYPICAL VALUE |
|--------------------------|---------------------------------------|
| Multiplication factor | Examine spurious-free bandwidth ratio |
| Phase noise contribution | $20 \log [N] + 3 \text{ dB}$ |
| Output bandwidth | Examine spurious-free bandwidth ratio |
| Input power | +10 dBm |
| Output power | +10 dBm |
| Output power flatness | $\pm 1.50 \text{ dB}$ |
| Spurious rejection | -65 dBc |
| Output harmonics | -15 dBc |
| Operating temperature | 0 to 50°C |
| Size | Depends on required rejection |

GENERAL SPECIFICATIONS

MITEQ's standard frequency multipliers have been designed to meet the following environmental conditions:

Operating temperature -30 to +75°C

Storage temperature -40 to +85°C

Humidity 95% relative humidity, noncondensing

Vibration 7 Gs RMS, 50-5000 CPS, per MIL-STD-810B, Method 514, Procedure 5

Data curves are at 25°C There will be some variation in the typical data shown as a function of temperature

PERCENTAGE BANDWIDTH, REJECTION AND SIZE

The last topic to address is perhaps the most complicated. It relates to having some feel for how large a multiplier will be in order to achieve proper spurious rejection. Two diagnostic tools used at MITEQ are presented here, which have played an important role in this regard;

Multiplier Percentage Bandwidth = $[\text{Output Bandwidth}] / [\text{Operating Frequency}]$
MITEQ produces designs with 10 to 15 percent bandwidths.

Bandwidth Ratio = $[\text{Reject Frequency} - \text{Center Frequency}] / [\text{Output Bandwidth}]$
Generally, the higher the number the better.


When the percentage bandwidth gets too large, and/or when the bandwidth ratio gets too small, the multiplier becomes difficult to produce and may become quite large, because the filtering requirements are forcing the number of filtering elements to increase. It is also true that the size is related to the operating frequency.

Since the filter is often the largest component of the multiplier, it is useful to know how many resonators are needed and how large your multiplier might be. MITEQ has engineering support available to help you get a feel for how large your multiplier might be. **Contact MITEQ at (631) 439-9413** to discuss the details about specifying the spurious rejection and size of your multiplier requirement for a cost-effective design.


FREQUENCY MULTIPLIERS

TYPICAL PERFORMANCE VS. INPUT POWER


INPUT RETURN LOSS VS. INPUT POWER FOR J DRIVE LEVEL MULTIPLIERS

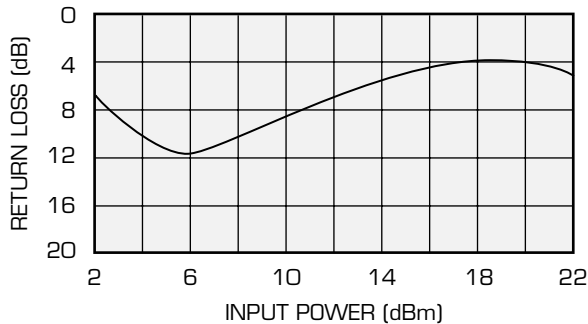


INPUT RETURN LOSS VS. INPUT POWER FOR M DRIVE LEVEL MULTIPLIERS

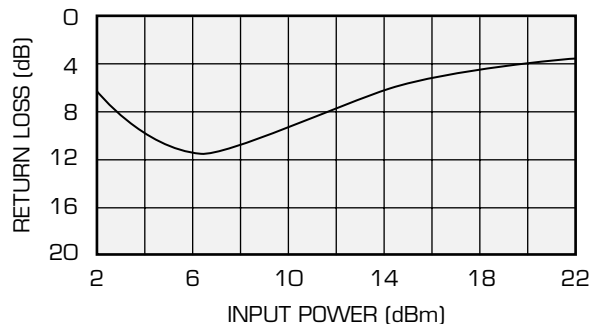

INPUT RETURN LOSS VS. INPUT POWER FOR V DRIVE LEVEL MULTIPLIERS

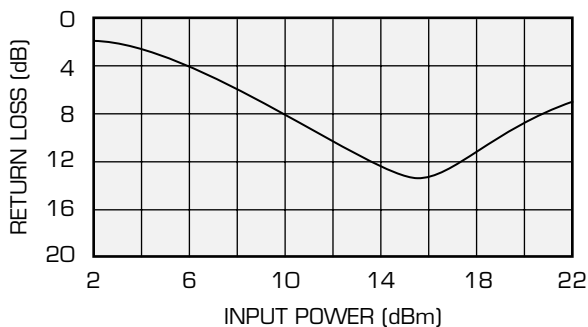

OUTPUT VS. INPUT POWER LEVEL FOR M AND V DRIVE LEVEL MULTIPLIERS

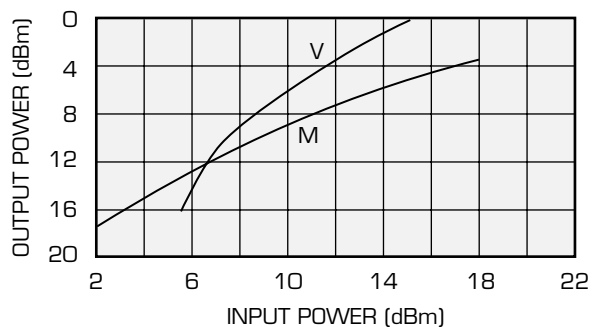

AVAILABLE INPUT POWER OPTIONS

| DRIVE LEVEL | INPUT DRIVE (dBm) |
|-------------|-------------------|
| J | 3 – 8 |
| M | 8 – 12 |
| H | 12 – 16 |
| V | 16 – 20 |
| U | 20 – 25 |

COMMON APPLICATIONS

SATCOM PRODUCTS-COMMUNICATIONS RECEIVERS

Microwave front ends usually employ a phase-locked source, such as a frequency synthesizer which has extremely low phase-noise characteristics, especially for digital communications. The synthesizer uses a fundamental VCO which is locked to highly-stable crystal reference sources. The frequency limitation of many commercial VCOs and frequency dividers is 3500 MHz. A multiplier is employed to extend the synthesizer range.

RADAR RECEIVERS

Most high-quality radars employ frequency synthesizers which require frequency multipliers. The phase noise must be low to avoid clutter noise.

INSTRUMENTATION APPLICATIONS

Frequency synthesizers which require multipliers are found in the front end of many measuring instruments which require low phase-noise LOs. One example is a spectrum analyzer.

RADIO ASTRONOMY APPLICATIONS

Interferometers and radiometers require broadband frequency doublers for wideband receivers. Frequency synthesizers are used to generate millimeter-wave frequencies to make the measurements.

MILLIMETER-WAVE SOURCES

Millimeter-wave frequencies are used in research applications for atomic spectroscopy and for various communications and radars. A multiplier chain can be used to generate these frequencies from a lower frequency source.

FREQUENCY STANDARDS

Highly-stable frequency sources can be multiplied to produce microwave sources used to measure the effect of the atmosphere or rocket exhaust on microwave signals.

PASSIVE FREQUENCY DOUBLERS

| MODEL NUMBER | INPUT FREQUENCY (GHz) | INPUT POWER (dBm) | OUTPUT FREQUENCY (GHz) | CONVERSION LOSS (dB) (Typ./Max.) | HARMONIC REJECTION FUND./ODD (dBc, Typ.) | OUTLINE NUMBER | OPTIONAL OUTLINE |
|-------------------------|-----------------------|-------------------|------------------------|-------------------------------------|--|----------------|------------------|
| OCTAVE BANDWIDTH | | | | | | | |
| MX2J020040 | 1 – 2 | 3 – 8 | 2 – 4 | 9.5 / 13 | 20 / 20 | MX2A | |
| MX2M020040 * | 1 – 2 | 8 – 12 | 2 – 4 | 9.5 / 13 | 20 / 20 | MX2A | |
| MX2H020040 | 1 – 2 | 12 – 16 | 2 – 4 | 9.5 / 13 | 20 / 20 | MX2A | |
| MX2V020040 | 1 – 2 | 16 – 20 | 2 – 4 | 9.5 / 13 | 20 / 20 | MX2A | |
| MX2U020040 | 1 – 2 | 20 – 25 | 2 – 4 | 9.5 / 13 | 20 / 20 | MX2A | |
| MX2J040080 | 2 – 4 | 3 – 8 | 4 – 8 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2M040080 * | 2 – 4 | 8 – 12 | 4 – 8 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2H040080 | 2 – 4 | 12 – 16 | 4 – 8 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2V040080 | 2 – 4 | 16 – 20 | 4 – 8 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2U040080 | 2 – 4 | 20 – 25 | 4 – 8 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2J080160 | 4 – 8 | 3 – 8 | 8 – 16 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2M080160 * | 4 – 8 | 8 – 12 | 8 – 16 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2H080160 | 4 – 8 | 12 – 16 | 8 – 16 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2V080160 | 4 – 8 | 16 – 20 | 8 – 16 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2U080160 | 4 – 8 | 20 – 25 | 8 – 16 | 11 / 13** | 20 / 20 | MX2B | MX2C |
| MX2J130260 | 6.5 – 13 | 3 – 8 | 13 – 26 | 11 / 13 | 20 / 20 | MX2D | |
| MX2M130260 * | 6.5 – 13 | 8 – 12 | 13 – 26 | 11 / 13 | 20 / 20 | MX2D | |
| MX2H130260 | 6.5 – 13 | 12 – 16 | 13 – 26 | 11 / 13 | 20 / 20 | MX2D | |
| MX2V130260 | 6.5 – 13 | 16 – 20 | 13 – 26 | 11 / 13 | 20 / 20 | MX2D | |
| MX2U130260 | 6.5 – 13 | 20 – 25 | 13 – 26 | 11 / 13 | 20 / 20 | MX2D | |
| MX2M260400 * | 13 – 20 | 8 – 12 | 26 – 40 | 10 / 13 | 15 / 15 | MX2E | |
| MX2V260400 | 13 – 20 | 16 – 20 | 26 – 40 | 10 / 13 | 15 / 15 | MX2E | |

** 15 dB for MX2C outline.

| MULTIOCTAVE BANDWIDTH | | | | | | | |
|------------------------------|------------|---------|----------|-----------|---------|------|------|
| MX2J004010 | 0.02 – 0.5 | 3 – 8 | 0.04 – 1 | 10.5 / 13 | 25 / 25 | MX2A | |
| MX2M004010 * | 0.02 – 0.5 | 8 – 12 | 0.04 – 1 | 10.5 / 13 | 25 / 25 | MX2A | |
| MX2H004010 | 0.02 – 0.5 | 12 – 16 | 0.04 – 1 | 10.5 / 13 | 25 / 25 | MX2A | |
| MX2V004010 | 0.02 – 0.5 | 16 – 20 | 0.04 – 1 | 10.5 / 13 | 25 / 25 | MX2A | |
| MX2U004010 | 0.02 – 0.5 | 20 – 25 | 0.04 – 1 | 10.5 / 13 | 25 / 25 | MX2A | |
| MX2J010060 | 0.5 – 3 | 3 – 8 | 1 – 6 | 10.5 / 15 | 15 / 20 | MX2A | |
| MX2M010060 * | 0.5 – 3 | 8 – 12 | 1 – 6 | 10.5 / 15 | 15 / 20 | MX2A | |
| MX2H010060 | 0.5 – 3 | 12 – 16 | 1 – 6 | 10.5 / 15 | 15 / 20 | MX2A | |
| MX2V010060 | 0.5 – 3 | 16 – 20 | 1 – 6 | 10.5 / 15 | 15 / 20 | MX2A | |
| MX2U010060 | 0.5 – 3 | 20 – 25 | 1 – 6 | 10.5 / 15 | 15 / 20 | MX2A | |
| MX2J030180 | 1.5 – 9 | 3 – 8 | 3 – 18 | 12 / 15 | 15 / 20 | MX2B | MX2C |
| MX2M030180 * | 1.5 – 9 | 8 – 12 | 3 – 18 | 12 / 15 | 15 / 20 | MX2B | MX2C |
| MX2H030180 | 1.5 – 9 | 12 – 16 | 3 – 18 | 12 / 15 | 15 / 20 | MX2B | MX2C |
| MX2V030180 | 1.5 – 9 | 16 – 20 | 3 – 18 | 12 / 15 | 15 / 20 | MX2B | MX2C |
| MX2U030180 | 1.5 – 9 | 20 – 25 | 3 – 18 | 12 / 15 | 15 / 20 | MX2B | MX2C |
| MX2J060260 | 3 – 13 | 3 – 8 | 6 – 26 | 12 / 18 | 15 / 20 | MX2D | |
| MX2M060260 * | 3 – 13 | 8 – 12 | 6 – 26 | 12 / 18 | 15 / 20 | MX2D | |
| MX2H060260 | 3 – 13 | 12 – 16 | 6 – 26 | 12 / 18 | 15 / 20 | MX2D | |
| MX2V060260 | 3 – 13 | 16 – 20 | 6 – 26 | 12 / 18 | 15 / 20 | MX2D | |
| MX2U060260 | 3 – 13 | 20 – 25 | 6 – 26 | 12 / 18 | 15 / 20 | MX2D | |

* Complete data sheet available inside catalog.

Consult MITEQ for higher-order passive multipliers.

ACTIVE FREQUENCY DOUBLERS

| MODEL NUMBER | INPUT FREQUENCY (GHz) | INPUT POWER (dBm) | OUTPUT FREQUENCY (GHz) | OUTPUT POWER (dBm, Typ.) | CONVERSION GAIN (dB, Typ.) | HARMONIC REJECTION FUND./ODD (dBc, Typ.) | NOM. DC POWER (+15 V, mA) | OUTLINE NUMBER |
|------------------------------|-----------------------|-------------------|------------------------|--------------------------|----------------------------|--|---------------------------|----------------|
| OCTAVE BANDWIDTH | | | | | | | | |
| MAX2J020040 | 1 – 2 | 3 – 8 | 2 – 4 | 3 – 8 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2M020040 * | 1 – 2 | 8 – 12 | 2 – 4 | 8 – 12 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2H020040 | 1 – 2 | 12 – 16 | 2 – 4 | 12 – 16 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2V020040 | 1 – 2 | 16 – 20 | 2 – 4 | 16 – 20 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2J040080 | 2 – 4 | 3 – 8 | 4 – 8 | 3 – 8 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2M040080 * | 2 – 4 | 8 – 12 | 4 – 8 | 8 – 12 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2H040080 | 2 – 4 | 12 – 16 | 4 – 8 | 12 – 16 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2V040080 | 2 – 4 | 16 – 20 | 4 – 8 | 16 – 20 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2J080160 | 4 – 8 | 3 – 8 | 8 – 16 | 3 – 8 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2M080160 * | 4 – 8 | 8 – 12 | 8 – 16 | 8 – 12 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2H080160 | 4 – 8 | 12 – 16 | 8 – 16 | 12 – 16 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2V080160 | 4 – 8 | 16 – 20 | 8 – 16 | 16 – 20 | 0 | 20 / 20 | 150 | MAX2B |
| MAX2J130260 | 6.5 – 13 | 3 – 8 | 13 – 26 | 3 – 8 | 0 | 20 / 20 | 210 | MAX2C |
| MAX2M130260 * | 6.5 – 13 | 8 – 12 | 13 – 26 | 8 – 12 | 0 | 20 / 20 | 210 | MAX2C |
| MAX2H130260 | 6.5 – 13 | 12 – 16 | 13 – 26 | 12 – 16 | 0 | 20 / 20 | 300 | MAX2C |
| MAX2V130260 | 6.5 – 13 | 16 – 20 | 13 – 26 | 16 – 20 | 0 | 20 / 20 | 350 | MAX2C |
| MAX2M200380S | 10 – 19 | 6 – 14 | 20 – 38 | 14 – 16 | 0 | 18 / 18 | 200 | MAX2H |
| MAX2M200400 * | 10 – 20 | 10 – 15 | 20 – 40 | 10 – 13 | 0 | 18 / 18 | 200 | MAX2F |
| MAX2M260400 * | 13 – 20 | 10 – 15 | 26 – 40 | 12 – 15 | 0 | 18 / 18 | 200 | MAX2F |
| MAX2M260400 * | 13 – 20 | 10 – 15 | 26 – 40 | 12 – 13 | 0 | 18 / 18 | 200 | MAX2G |
| MAX2M300500 * | 15 – 25 | 10 – 15 | 30 – 50 | 8 – 11 | 0 | 18 / 18 | 200 | MAX2F |
| MAX2M360500 * | 18 – 25 | 10 – 15 | 36 – 50 | 8 – 11 | 0 | 18 / 18 | 200 | MAX2F |
| MULTIOCTAVE BANDWIDTH | | | | | | | | |
| MAX2J010060 | 0.5 – 3 | 3 – 8 | 1 – 6 | 3 – 8 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2M010060 * | 0.5 – 3 | 8 – 12 | 1 – 6 | 8 – 12 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2H010060 | 0.5 – 3 | 12 – 16 | 1 – 6 | 12 – 16 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2V010060 | 0.5 – 3 | 16 – 20 | 1 – 6 | 16 – 20 | 0 | 20 / 20 | 150 | MAX2A |
| MAX2J030180 | 1.5 – 9 | 3 – 8 | 3 – 18 | 3 – 8 | 0 | 15 / 20 | 150 | MAX2B |
| MAX2M030180 * | 1.5 – 9 | 8 – 12 | 3 – 18 | 8 – 12 | 0 | 15 / 20 | 150 | MAX2B |
| MAX2H030180 | 1.5 – 9 | 12 – 16 | 3 – 18 | 12 – 16 | 0 | 15 / 20 | 150 | MAX2B |
| MAX2V030180 | 1.5 – 9 | 16 – 20 | 3 – 18 | 16 – 20 | 0 | 15 / 20 | 150 | MAX2B |
| MAX2J060260 | 3 – 13 | 3 – 8 | 6 – 26 | 3 – 8 | 0 | 12 / 15 | 210 | MAX2C |
| MAX2M060260 * | 3 – 13 | 8 – 12 | 6 – 26 | 8 – 12 | 0 | 12 / 15 | 210 | MAX2C |
| MAX2H060260 | 3 – 13 | 12 – 16 | 6 – 26 | 12 – 16 | 0 | 12 / 15 | 300 | MAX2C |
| MAX2V060260 | 3 – 13 | 16 – 20 | 6 – 26 | 16 – 20 | 0 | 12 / 15 | 350 | MAX2C2 |

* Complete data sheet available inside catalog.

| MODEL NUMBER | INPUT FREQUENCY (GHz) | INPUT POWER (dBm) | OUTPUT FREQUENCY (GHz) | OUTPUT POWER (dBm, Typ.) | CONVERSION GAIN (dB, Typ.) | HARMONIC REJECTION IN/OUT (dBc, Typ.) | NOM. DC POWER (+15 V, mA) | OUTLINE NUMBER |
|---|-----------------------|-------------------|------------------------|--------------------------|----------------------------|---------------------------------------|---------------------------|-----------------|
| DOUBLERS WITH INTEGRATED FILTERS | | | | | | | | |
| MAX2M097103 | 4.88 – 5.13 | 8 – 12 | 9.76 – 10.26 | 11 – 15 | 3 | -60 / -15 | 160 | Consult factory |
| MAX2M132152 | 6.6 – 7.63 | 8 – 12 | 13.21 – 15.26 | 11 – 15 | 3 | -60 / -15 | 160 | Consult factory |

ACTIVE FREQUENCY TRIPLERS

| MODEL NUMBER | INPUT FREQUENCY (GHz) | INPUT POWER (dBm) | OUTPUT FREQUENCY (GHz) | OUTPUT POWER (dBm, Typ.) | CONVERSION GAIN (dB, Typ.) | HARMONIC REJECTION IN/OUT (dBc, Min.) | POWER FLATNESS (±dB, Typ.) | VSWR IN/OUT (Typ.) | NOM. DC POWER (+5 V, mA) | OUTLINE NUMBER |
|-----------------|-----------------------|-------------------|------------------------|--------------------------|----------------------------|---------------------------------------|----------------------------|--------------------|--------------------------|----------------|
| TRIPLERS | | | | | | | | | | |
| MAX3J045050 | 1.5 – 1.67 | 3 – 8 | 4.5 – 5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M045050 | 1.5 – 1.67 | 8 – 12 | 4.5 – 5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H045050 | 1.5 – 1.67 | 12 – 16 | 4.5 – 5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J050055 | 1.67 – 1.83 | 3 – 8 | 5 – 5.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M050055 | 1.67 – 1.83 | 8 – 12 | 5 – 5.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H050055 | 1.67 – 1.83 | 12 – 16 | 5 – 5.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J055060 | 1.83 – 2 | 3 – 8 | 5.5 – 6 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M055060 | 1.83 – 2 | 8 – 12 | 5.5 – 6 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H055060 | 1.83 – 2 | 12 – 16 | 5.5 – 6 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J060065 | 2 – 2.16 | 3 – 8 | 6 – 6.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M060065 | 2 – 2.16 | 8 – 12 | 6 – 6.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H060065 | 2 – 2.16 | 12 – 16 | 6 – 6.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J065070 | 2.16 – 2.33 | 3 – 8 | 6.5 – 7 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M065070 | 2.16 – 2.33 | 8 – 12 | 6.5 – 7 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H065070 | 2.16 – 2.33 | 12 – 16 | 6.5 – 7 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J070075 | 2.33 – 2.5 | 3 – 8 | 7 – 7.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M070075 | 2.33 – 2.5 | 8 – 12 | 7 – 7.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H070075 | 2.33 – 2.5 | 12 – 16 | 7 – 7.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J075080 | 2.5 – 2.66 | 3 – 8 | 7.5 – 8 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M075080 | 2.5 – 2.66 | 8 – 12 | 7.5 – 8 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H075080 | 2.5 – 2.66 | 12 – 16 | 7.5 – 8 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J080085 | 2.66 – 2.83 | 3 – 8 | 8 – 8.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M080085 | 2.66 – 2.83 | 8 – 12 | 8 – 8.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H080085 | 2.66 – 2.83 | 12 – 16 | 8 – 8.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J043052 | 1.43 – 1.73 | 3 – 8 | 4.3 – 5.2 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M043052 | 1.43 – 1.73 | 8 – 12 | 4.3 – 5.2 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H043052 | 1.43 – 1.73 | 12 – 16 | 4.3 – 5.2 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J047056 | 1.56 – 1.86 | 3 – 8 | 4.7 – 5.6 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M047056 | 1.56 – 1.86 | 8 – 12 | 4.7 – 5.6 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H047056 | 1.56 – 1.86 | 12 – 16 | 4.7 – 5.6 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J063074 | 2.1 – 2.46 | 3 – 8 | 6.3 – 7.4 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M063074 | 2.1 – 2.46 | 8 – 12 | 6.3 – 7.4 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H063074 | 2.1 – 2.46 | 12 – 16 | 6.3 – 7.4 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3J070083 | 2.3 – 2.76 | 3 – 8 | 7 – 8.3 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M070083 | 2.3 – 2.76 | 8 – 12 | 7 – 8.3 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3H070083 | 2.3 – 2.76 | 12 – 16 | 7 – 8.3 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 120 | MAX3A |
| MAX3M300300 | 10 | 10 – 15 | 30 | 10 – 13 | 0 | 18 / 18 | – | 3:1 / 2.1 | 160* | MAX2F |

* Nominal current at +15 VDC.

HIGHER-ORDER ACTIVE MULTIPLIERS

| MODEL NUMBER | INPUT FREQUENCY (GHz) | INPUT POWER (dBm) | OUTPUT FREQUENCY (GHz) | OUTPUT POWER (dBm, Typ.) | CONVERSION GAIN (dB, Typ.) | HARMONIC REJECTION IN/OUT (dBc, Min.) | POWER FLATNESS (\pm dB, Typ.) | VSWR IN/OUT (Typ.) | NOM. DC POWER (+15 V, mA) | OUTLINE NUMBER |
|--------------------|-----------------------|-------------------|------------------------|--------------------------|----------------------------|---------------------------------------|----------------------------------|--------------------|---------------------------|----------------|
| QUADRUPLERS | | | | | | | | | | |
| MAX4J050055 | 1.25 – 1.375 | 3 – 8 | 5 – 5.5 | 6 – 11 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M050055 * | 1.25 – 1.375 | 8 – 12 | 5 – 5.5 | 11 – 15 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4H050055 | 1.25 – 1.375 | 12 – 16 | 5 – 5.5 | 12 – 16 | 0 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4J055060 | 1.375 – 1.5 | 3 – 8 | 5.5 – 6 | 6 – 11 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M055060 | 1.375 – 1.5 | 8 – 12 | 5.5 – 6 | 11 – 15 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4H055060 | 1.375 – 1.5 | 12 – 16 | 5.5 – 6 | 12 – 16 | 0 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4J060065 | 1.5 – 1.625 | 3 – 8 | 6 – 6.5 | 6 – 11 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M060065 | 1.5 – 1.625 | 8 – 12 | 6 – 6.5 | 11 – 15 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4H060065 | 1.5 – 1.625 | 12 – 16 | 6 – 6.5 | 12 – 16 | 0 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M062071 * | 1.55 – 1.78 | 8 – 12 | 6.2 – 7.1 | 11 – 15 | 3 | -50 / -15 | 2 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4J065070 | 1.625 – 1.75 | 3 – 8 | 6.5 – 7 | 6 – 11 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M065070 | 1.625 – 1.75 | 8 – 12 | 6.5 – 7 | 11 – 15 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4H065070 | 1.625 – 1.75 | 12 – 16 | 6.5 – 7 | 12 – 16 | 0 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4J070075 | 1.75 – 1.875 | 3 – 8 | 7 – 7.5 | 6 – 11 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M070075 | 1.75 – 1.875 | 8 – 12 | 7 – 7.5 | 11 – 15 | 3 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4H070075 | 1.75 – 1.875 | 12 – 16 | 7 – 7.5 | 12 – 16 | 0 | -50 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX4A |
| MAX4M400480 * | 10 – 12 | 10 – 15 | 40 – 48 | 8 – 11 | 0 | 18 / 18 | 2 | 3:1 / 2.5:1 | 150 | MAX2H |
| QUINTUPLERS | | | | | | | | | | |
| MAX5M65075 * | 1.3 – 1.5 | 8 – 12 | 6.5 – 7.5 | 11 – 15 | 3 | -40 / -15 | 1.5 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J085090 | 1.7 – 1.8 | 3 – 8 | 8.5 – 9 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M085090 | 1.7 – 1.8 | 8 – 12 | 8.5 – 9 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H085090 | 1.7 – 1.8 | 12 – 16 | 8.5 – 9 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J090095 | 1.8 – 1.9 | 3 – 8 | 9 – 9.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M090095 | 1.8 – 1.9 | 8 – 12 | 9 – 9.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H090095 | 1.8 – 1.9 | 12 – 16 | 9 – 9.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J095105 | 1.9 – 2.1 | 3 – 8 | 9.5 – 10.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M095105 | 1.9 – 2.1 | 8 – 12 | 9.5 – 10.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H095105 | 1.9 – 2.1 | 12 – 16 | 9.5 – 10.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J105115 | 2.1 – 2.3 | 3 – 8 | 10.5 – 11.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M105115 | 2.1 – 2.3 | 8 – 12 | 10.5 – 11.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H105115 | 2.1 – 2.3 | 12 – 16 | 10.5 – 11.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J115125 | 2.3 – 2.5 | 3 – 8 | 11.5 – 12.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M115125 | 2.3 – 2.5 | 8 – 12 | 11.5 – 12.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H115125 | 2.3 – 2.5 | 12 – 16 | 11.5 – 12.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J125135 | 2.5 – 2.7 | 3 – 8 | 12.5 – 13.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M125135 | 2.5 – 2.7 | 8 – 12 | 12.5 – 13.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H125135 | 2.5 – 2.7 | 12 – 16 | 12.5 – 13.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J135145 | 2.7 – 2.9 | 3 – 8 | 13.5 – 14.5 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M135145 | 2.7 – 2.9 | 8 – 12 | 13.5 – 14.5 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H135145 | 2.7 – 2.9 | 12 – 16 | 13.5 – 14.5 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |

* Complete data sheet available inside catalog.

HIGHER-ORDER ACTIVE MULTIPLIERS (CONT.)

| MODEL NUMBER | INPUT FREQUENCY (GHz) | INPUT POWER (dBm) | OUTPUT FREQUENCY (GHz) | OUTPUT POWER (dBm, Typ.) | CONVERSION GAIN (dB, Typ.) | HARMONIC REJECTION IN/OUT (dBc, Min.) | POWER FLATNESS (\pm dB, Typ.) | VSWR IN/OUT (Typ.) | NOM. DC POWER (+15 V, mA) | OUTLINE NUMBER |
|----------------------------|-----------------------|-------------------|------------------------|--------------------------|----------------------------|---------------------------------------|----------------------------------|--------------------|---------------------------|----------------|
| QUINTUPLERS (CONT.) | | | | | | | | | | |
| MAX5J114127 | 2.28 – 2.56 | 3 – 8 | 11.4 – 12.8 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M114127 | 2.28 – 2.56 | 8 – 12 | 11.4 – 12.8 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H114127 | 2.28 – 2.56 | 12 – 16 | 11.4 – 12.8 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5J127142 | 2.54 – 2.84 | 3 – 8 | 12.7 – 14.2 | 6 – 11 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5M127142 | 2.54 – 2.84 | 8 – 12 | 12.7 – 14.2 | 11 – 15 | 3 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| MAX5H127142 | 2.54 – 2.84 | 12 – 16 | 12.7 – 14.2 | 12 – 16 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 150 | MAX5A |
| FREQUENCY X 6 | | | | | | | | | | |
| MAX6M126132 * | 2.1 – 2.2 | 10 | 12.6 – 13.2 | 20 | 10 | -60 / -15 | 1 | 2:1 / 1.5:1 | 450 | ** |
| FREQUENCY X 8 | | | | | | | | | | |
| MAX8S070070 | 0.875 | 10 | 7 | -2 | -12 | -65 / -50 | N/A | 2:1 / 1.5:1 | 450 | ** |
| MAX8M080085 | 1.0 – 1.06 | 10 | 8 – 8.5 | 14 | 4 | -50 / -15 | 1.5 | 2:1 / 1.5:1 | 450 | ** |
| FREQUENCY X 10 | | | | | | | | | | |
| MAX10M093098 | 0.93 – 0.98 | 10 | 9.3 – 9.8 | 10 | 0 | -50 / -15 | 1.5 | 2:1 / 1.5:1 | 450 | ** |
| FREQUENCY X 12 | | | | | | | | | | |
| MAX12M009009 | 0.081 – 0.082 | 8 – 12 | 0.972 – 0.984 | 8 – 12 | 0 | -60 / -15 | 1 | 2:1 / 1.5:1 | 450 | ** |
| FREQUENCY X 13 | | | | | | | | | | |
| MAX13M104104 | 0.8 | 10 | 10.4 | 15 | 5 | -50 / -50 | N/A | 2.5:1 / 2:1 | 450 | ** |
| FREQUENCY X 16 | | | | | | | | | | |
| MAX16S013015 * | 0.085 – 0.097 | -12 | 1.36 – 1.56 | 20 | 32 | -60 / -15 | 1 | 2:1 / 1.5:1 | 550 | ** |
| MAX16J064069 * | 0.397 – 0.428 | 7 | 6.36 – 6.86 | 20 | 13 | -60 / -40 | 1 | 2:1 / 2:1 | 550 | ** |
| FREQUENCY X 32 | | | | | | | | | | |
| MAX32S027029 * | 0.085 – 0.092 | -10 | 2.7 – 2.94 | 10 | 20 | -60 / -50 | 1.5 | 2:1 / 1.5:1 | 550 | ** |
| FREQUENCY X 48 | | | | | | | | | | |
| MAX48S029031 | 0.062 – 0.063 | 10 | 2.976 – 3.024 | -10 | -20 | -60 / -15 | 1 | 2:1 / 1.5:1 | 550 | ** |
| FREQUENCY X 64 | | | | | | | | | | |
| MAX64M068068 | 0.106 | 10 | 6.784 | 15 | 5 | -50 / -15 | N/A | 2.5:1 / 1.5:1 | 550 | ** |

* Complete data sheet available inside catalog.

** Consult factory for specific packaging information.

HIGHER-ORDER ACTIVE MULTIPLIERS (CONT.)

| MODEL NUMBER | INPUT FREQUENCY (GHz) | OUTPUT FREQUENCY (GHz) | INPUT/OUTPUT POWER (dBm) | CONVERSION GAIN (dB, Typ.) | VOLTAGE CURRENT (+V, -V, mA) | HARMONIC REJECTION IN/OUT (dBc, Min.) | POWER FLATNESS (±dB, Typ.) | VSWR IN/OUT (Typ.) | OUTLINE NUMBER |
|---------------------|-----------------------|------------------------|--------------------------|----------------------------|------------------------------|---------------------------------------|----------------------------|--------------------|----------------|
| CFS STANDARD | | | | | | | | | |
| MAX2M045055 | 2.25 – 2.78 | 4.5 – 5.58 | 8 – 10 | 0 | +5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX2D |
| MAX2M055059 | 2.75 – 2.94 | 5.51 – 5.59 | 8 – 10 | 0 | +5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX2D |
| MAX4M088095 | 2.2 – 2.37 | 8.88 – 9.48 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M109115 | 2.73 – 2.88 | 10.91 – 11.53 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M114120 | 2.86 – 3.01 | 11.46 – 12.03 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M114126 | 2.86 – 3.14 | 11.46 – 12.57 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M124133 | 3.11 – 3.32 | 12.46 – 13.28 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M127134 | 3.17 – 3.32 | 12.71 – 13.3 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M127148 | 3.18 – 3.85 | 12.72 – 14.84 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |
| MAX4M129138 | 3.24 – 3.45 | 12.97 – 13.79 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4B |
| MAX4M139144 | 3.48 – 3.61 | 13.95 – 14.46 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |
| MAX4M144146 | 3.61 – 3.65 | 14.4 – 14.66 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |
| MAX4M145154 | 3.62 – 4.22 | 14.5 – 15.4 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |
| MAX4M150162 | 3.75 – 4.05 | 15 – 16.17 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |
| MAX4M152163 | 3.8 – 4.08 | 15.21 – 16.31 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |
| MAX4M160169 | 4 – 4.22 | 16 – 16.9 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | MAX4C |

| MODEL NUMBER | INPUT FREQUENCY (GHz) | OUTPUT FREQUENCY (GHz) | INPUT/OUTPUT POWER (dBm) | CONVERSION GAIN (dBm, Typ.) | VOLTAGE CURRENT (+V, -V, mA) | HARMONIC REJECTION IN/OUT (dB) | POWER FLATNESS (±dB, Typ.) | VSWR IN/OUT (Typ.) | COUPLED PORT PWR RANGE (dB)* | OUTLINE NUMBER |
|-----------------|-----------------------|------------------------|--------------------------|-----------------------------|------------------------------|--------------------------------|----------------------------|--------------------|------------------------------|----------------|
| CFS 9700 | | | | | | | | | | |
| MAX2M04055-C | 2.25 – 2.78 | 4.5 – 5.58 | 8 – 10 | 0 | +5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | -17 to -23 | MAX2E |
| MAX2M055059-C | 2.75 – 2.94 | 5.51 – 5.59 | 8 – 10 | 0 | +5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | -17 to -23 | MAX2E |
| MAX4M104110-C | 2.6 – 2.75 | 10.4 – 11 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | -17 to -23 | MAX4D |
| MAX4M114126-C | 2.86 – 3.14 | 11.46 – 12.57 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | -17 to -23 | MAX4D |
| MAX4M127148-C | 3.18 – 3.85 | 12.72 – 14.84 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | -17 to -23 | MAX4E |
| MAX4M150162-C | 3.75 – 4.05 | 15 – 16.17 | 8 – 10 | 0 | +5, -2.5, 120 | -65 / -15 | 1.5 | 2:1 / 2:1 | -17 to -23 | MAX4E |

* Used to monitor main port

PASSIVE FREQUENCY DOUBLERS


MODEL: MX2M020040

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------------------|
| Input frequency range | 1 – 2 GHz minimum |
| Output frequency range | 2 – 4 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 9.5 dB typical 13 dB maximum |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |




CONVERSION LOSS VS. FREQUENCY

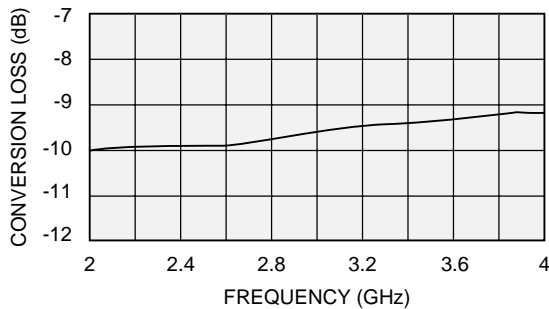

FUNDAMENTAL REJECTION VS. FREQUENCY

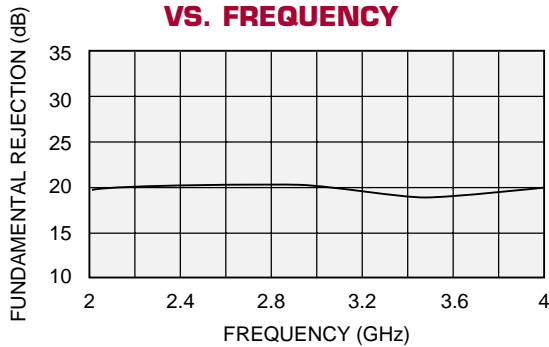


OUTPUT POWER VS. INPUT POWER

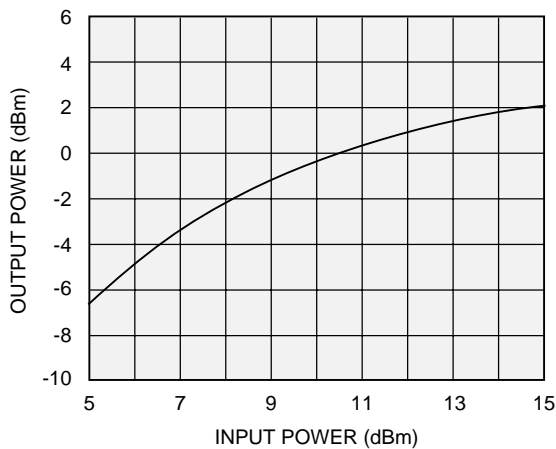

($P_{IN} = +10$ dBm)

MX2A

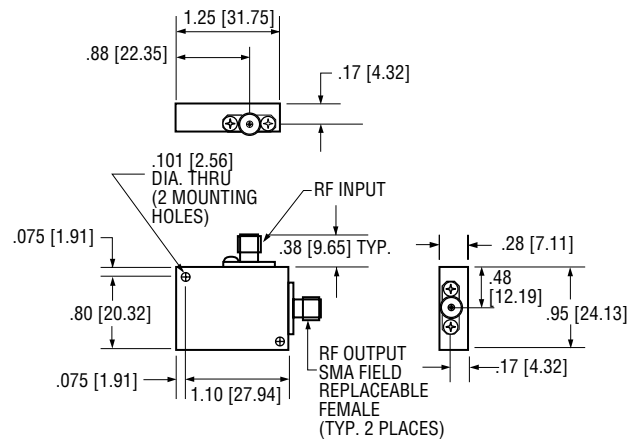

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M040080

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------------------|
| Input frequency range | 2 – 4 GHz minimum |
| Output frequency range | 4 – 8 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 11 dB typical 13 dB maximum |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |

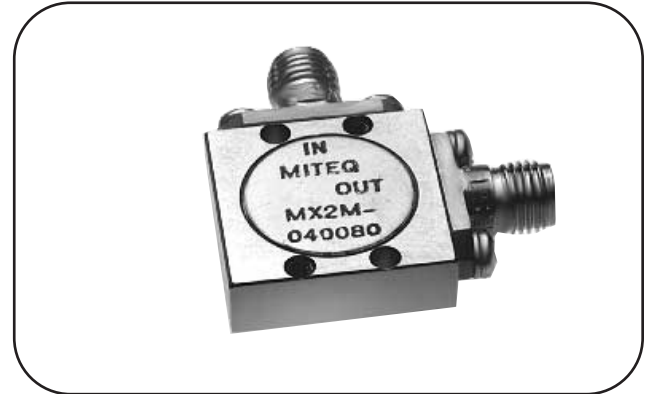


CONVERSION LOSS VS. FREQUENCY

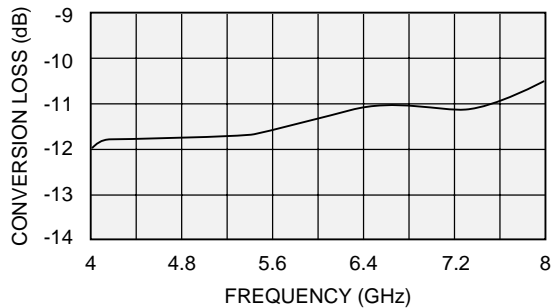

FUNDAMENTAL REJECTION VS. FREQUENCY

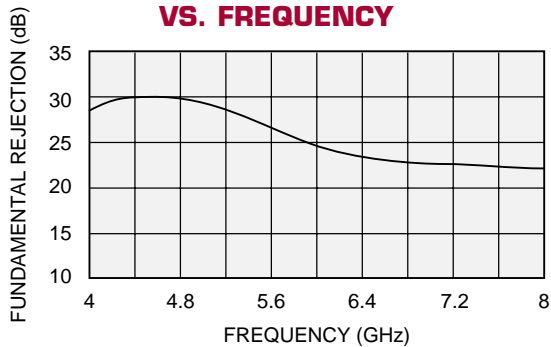


OUTPUT POWER VS. INPUT POWER

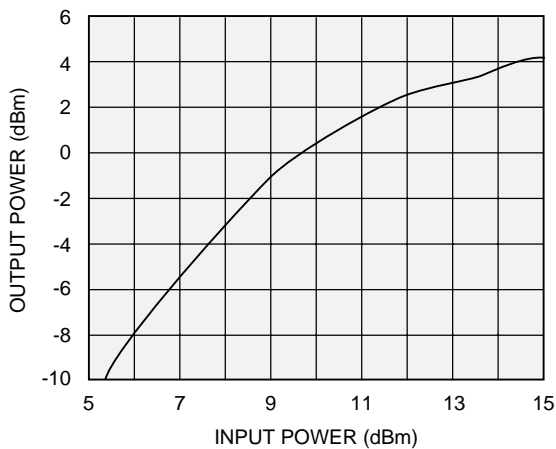

($P_{IN} = +10$ dBm)

MX2B

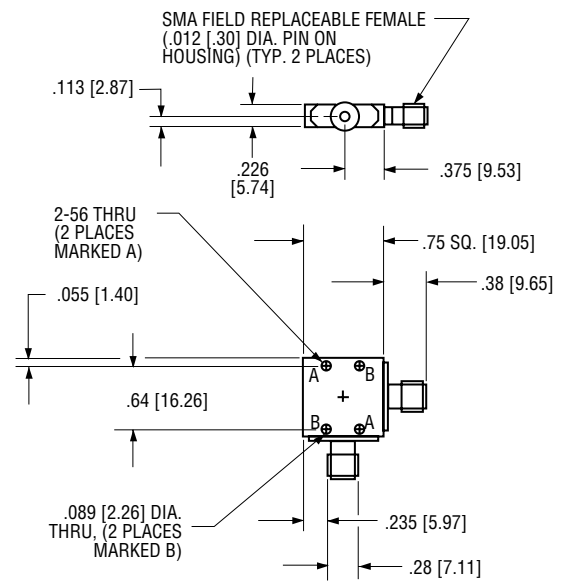

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional MX2C package available, see outline section.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M080160

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------------------|
| Input frequency range | 4 – 8 GHz minimum |
| Output frequency range | 8 – 16 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 11 dB typical 13 dB maximum |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |

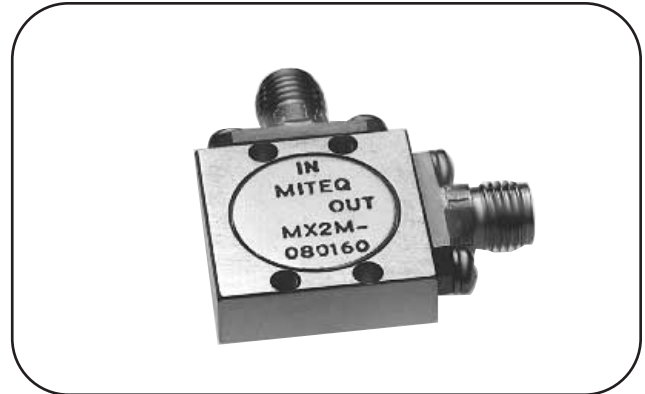


CONVERSION LOSS VS. FREQUENCY

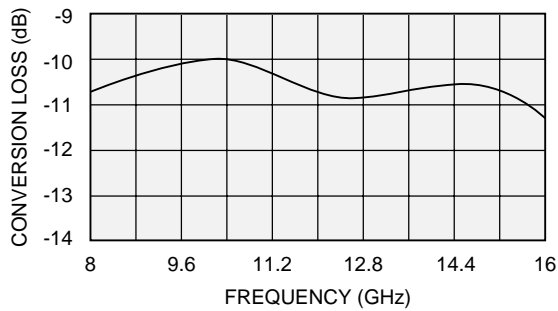

FUNDAMENTAL REJECTION VS. FREQUENCY

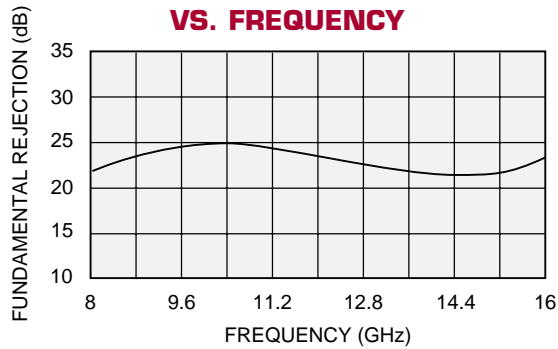


OUTPUT POWER VS. INPUT POWER

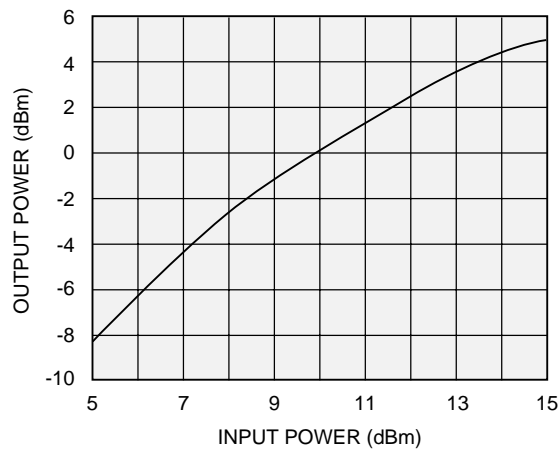

($P_{IN} = +10 \text{ dBm}$)

MX2B

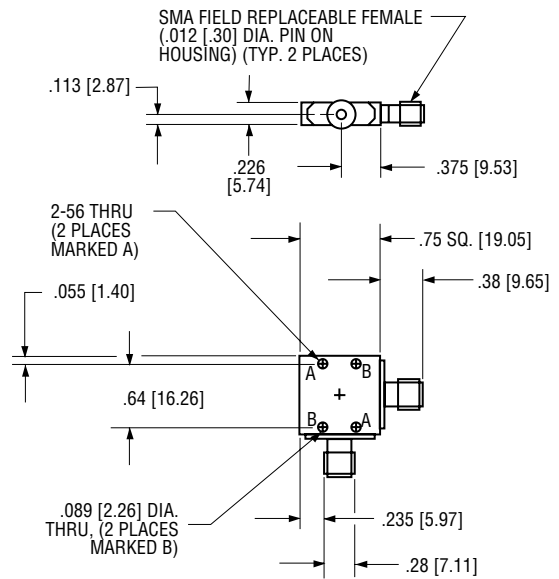

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional MX2C package available, see outline section.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M130260

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------------------|
| Input frequency range | 6.5 – 13 GHz minimum |
| Output frequency range | 13 – 26 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 11 dB typical 13 dB maximum |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |

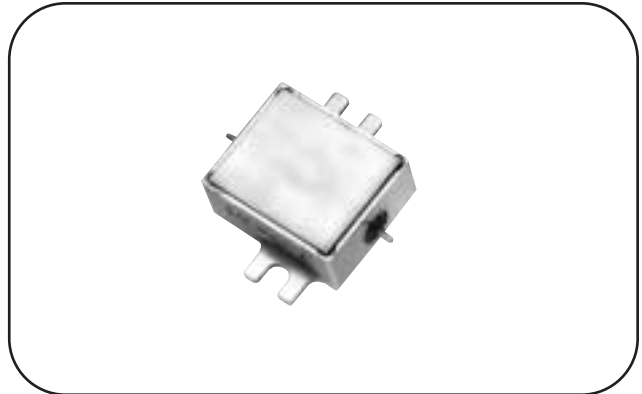


CONVERSION LOSS VS. FREQUENCY

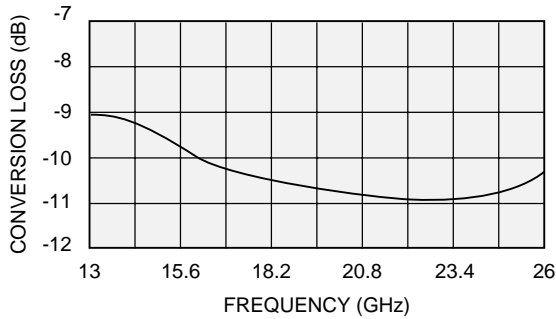

FUNDAMENTAL REJECTION VS. FREQUENCY


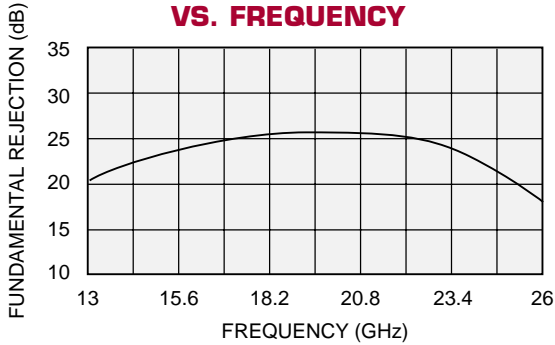


OUTPUT POWER VS. INPUT POWER

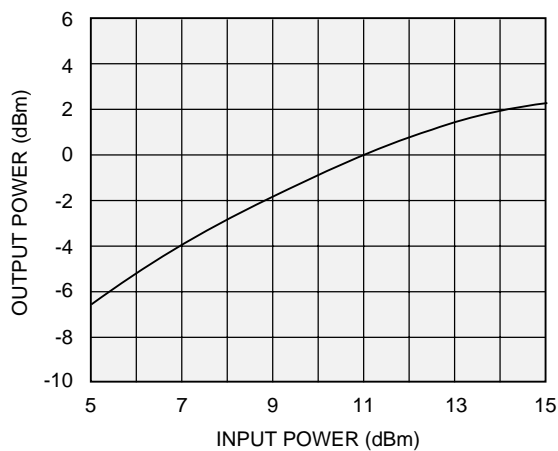

($P_{IN} = +10$ dBm)

MX2D

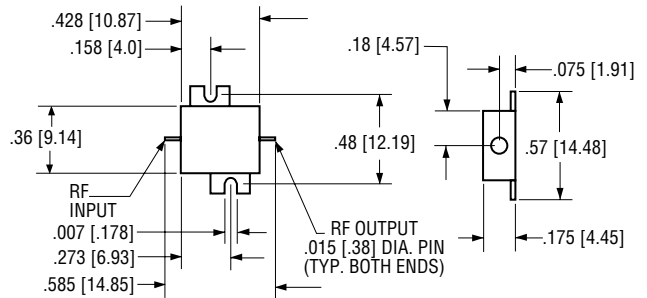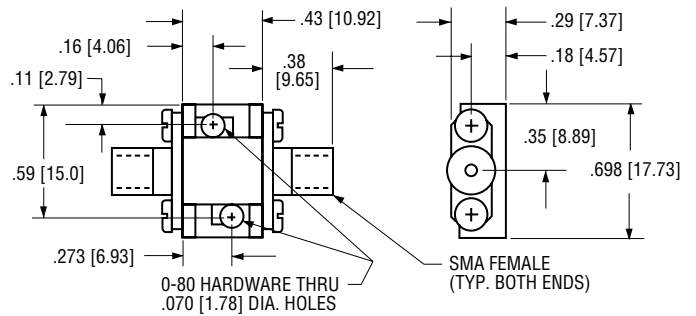

Notes:

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Doubler may be readily used as is, or as a drop-in by removing the SMA connectors and mounting hardware as shown.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M260400

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------------------|
| Input frequency range | 13 – 20 GHz minimum |
| Output frequency range | 26 – 40 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 10 dB typical 13 dB maximum |
| Harmonic rejection | |
| Fundamental | 15 dB typical |
| Odd harmonic | 15 dB typical |




CONVERSION LOSS VS. FREQUENCY

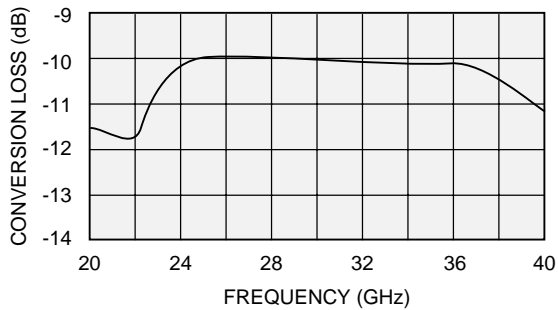

FUNDAMENTAL REJECTION VS. FREQUENCY

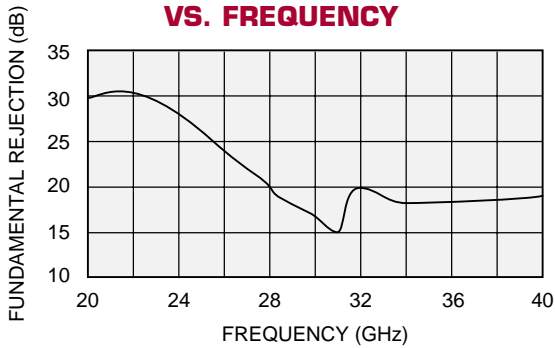


OUTPUT POWER VS. INPUT POWER

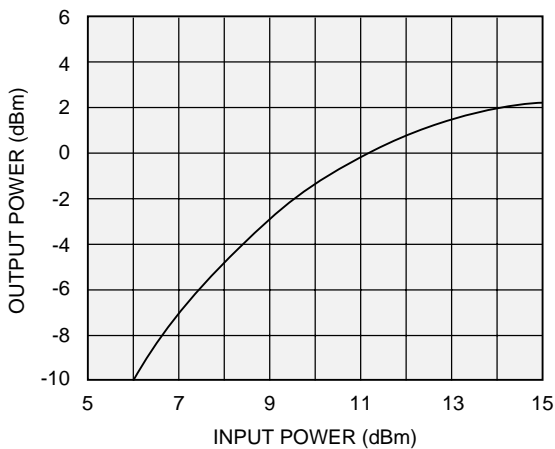

($P_{IN} = +10$ dBm)

MX2E

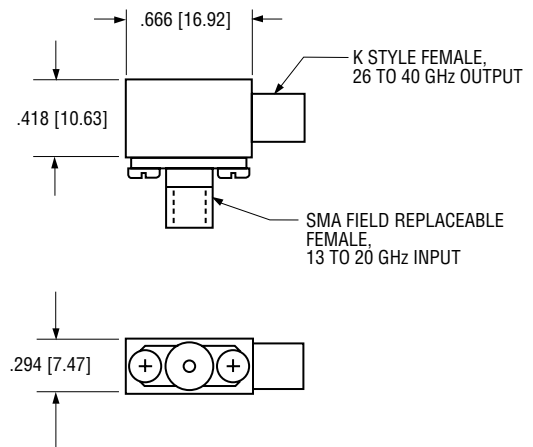

Notes:

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M010060

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|----------------------------------|
| Input frequency range | 0.5 – 3 GHz minimum |
| Output frequency range | 1 – 6 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 10.5 dB typical 15 dB maximum |
| Harmonic rejection | |
| Fundamental | 15 dB typical |
| Odd harmonic | 20 dB typical |




CONVERSION LOSS VS. FREQUENCY

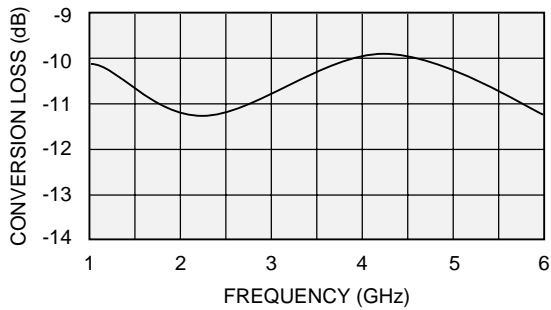

FUNDAMENTAL REJECTION VS. FREQUENCY

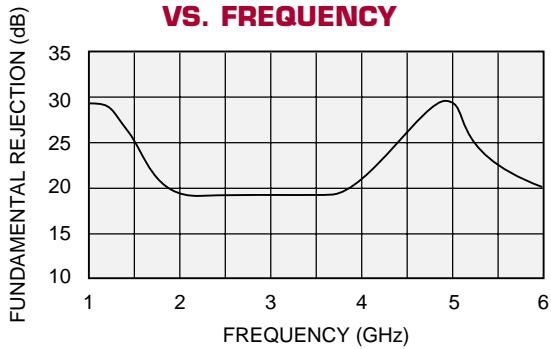


OUTPUT POWER VS. INPUT POWER

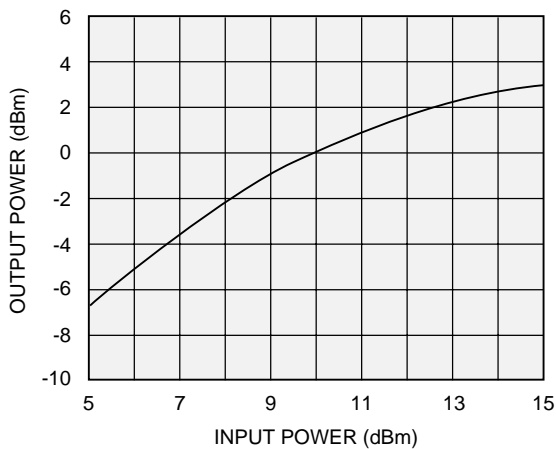

($P_{IN} = +10$ dBm)

MX2A

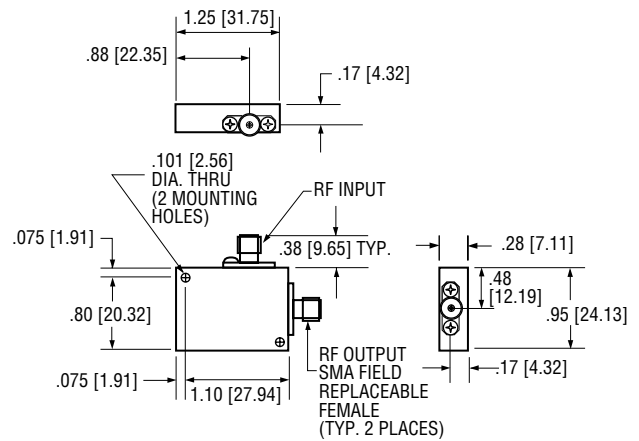

Notes:

1. Dimensions are in inches [millimeters]

Tolerance as follows:

.xx = ± 0.01 [.xx = ± 0.25]

.xxx = ± 0.005 [.xxx = ± 0.13]

2. Optional SMA, K or V type male connectors in either input, output or both.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M004010

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|----------------------------------|
| Input frequency range | 0.02 – 0.5 GHz minimum |
| Output frequency range | 0.04 – 1 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 10.5 dB typical 13 dB maximum |
| Harmonic rejection | |
| Fundamental | 25 dB typical |
| Odd harmonic | 25 dB typical |




CONVERSION LOSS VS. FREQUENCY

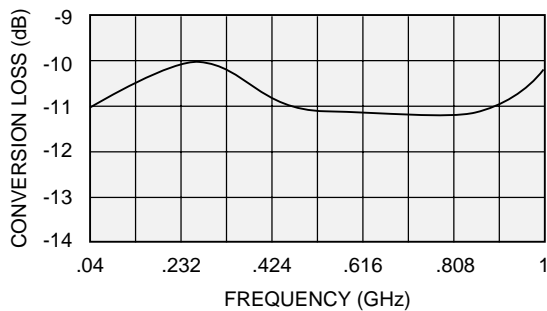

FUNDAMENTAL REJECTION VS. FREQUENCY

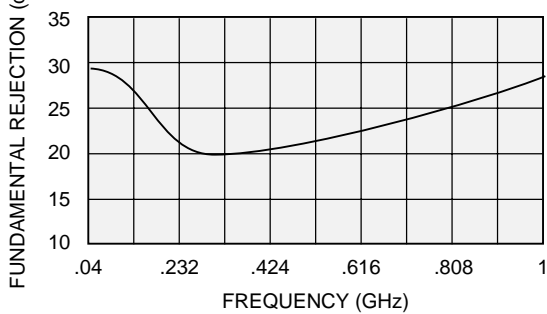


OUTPUT POWER VS. INPUT POWER

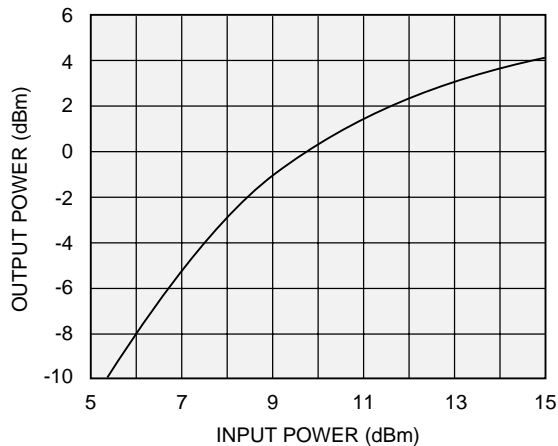

($P_{IN} = +10$ dBm)

MX2A

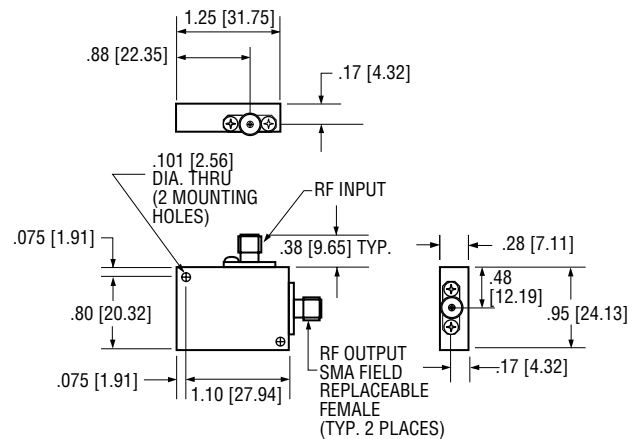

Notes:

1. Dimensions are in inches [millimeters]

Tolerance as follows:

.xx = ± 0.01 [.xx = ± 0.25]

.xxx = ± 0.005 [.xxx = ± 0.13]


2. Optional SMA, K or V type male connectors in either input, output or both.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M030180

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------------------|
| Input frequency range | 1.5 – 9 GHz minimum |
| Output frequency range | 3 – 18 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 12 dB typical 15 dB maximum |
| Harmonic rejection | |
| Fundamental | 15 dB typical |
| Odd harmonic | 20 dB typical |

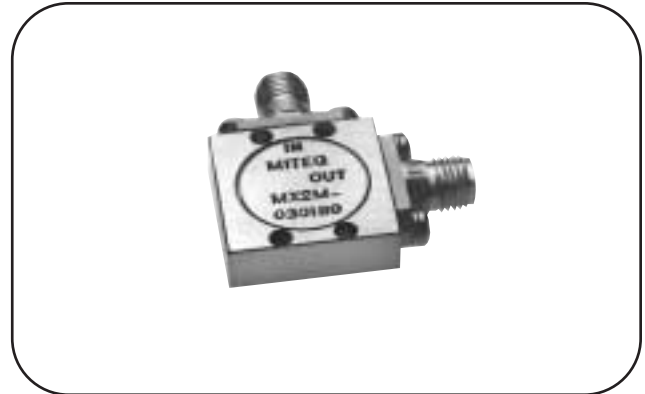


CONVERSION LOSS VS. FREQUENCY

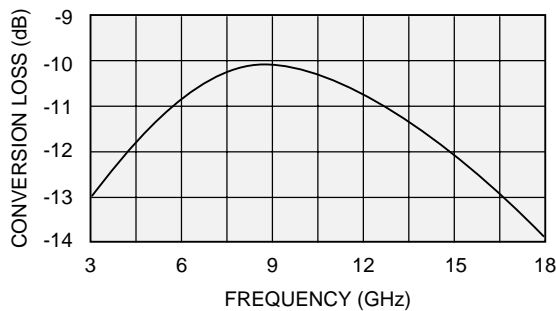

FUNDAMENTAL REJECTION VS. FREQUENCY

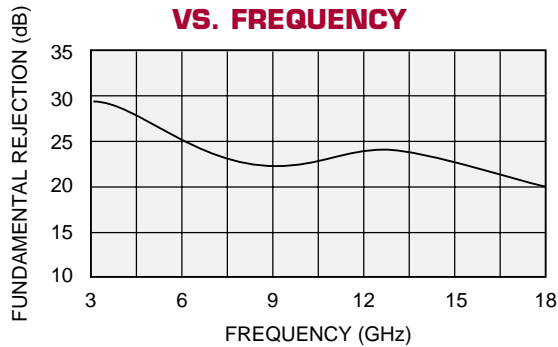


OUTPUT POWER VS. INPUT POWER

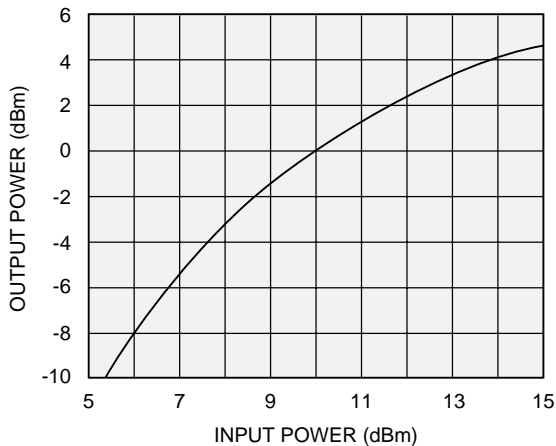

($P_{IN} = +10$ dBm)

MX2B

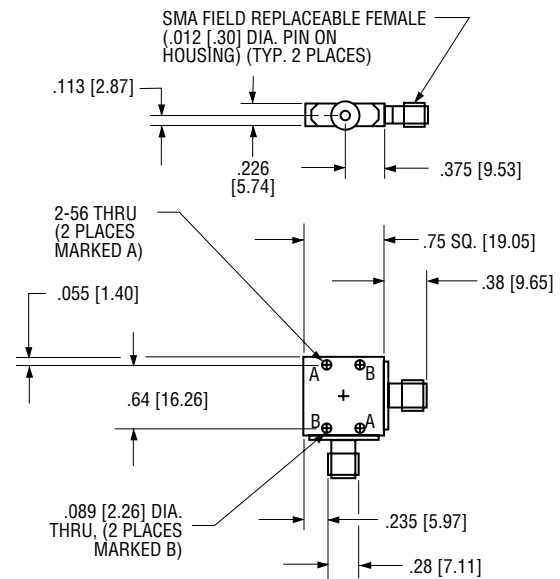

Notes:

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional MX2C package available, see outline section.

PASSIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MX2M060260

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------------------|
| Input frequency range | 3 – 13 GHz minimum |
| Output frequency range | 6 – 26 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 12 dB typical 15 dB maximum |
| Harmonic rejection | |
| Fundamental | 15 dB typical |
| Odd harmonic | 20 dB typical |




CONVERSION LOSS VS. FREQUENCY

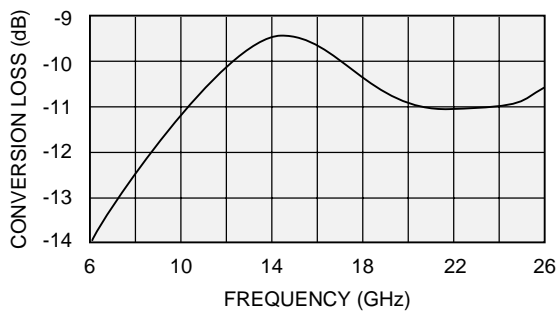

FUNDAMENTAL REJECTION VS. FREQUENCY


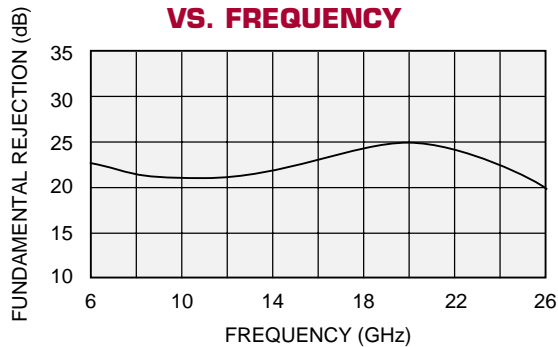


OUTPUT POWER VS. INPUT POWER

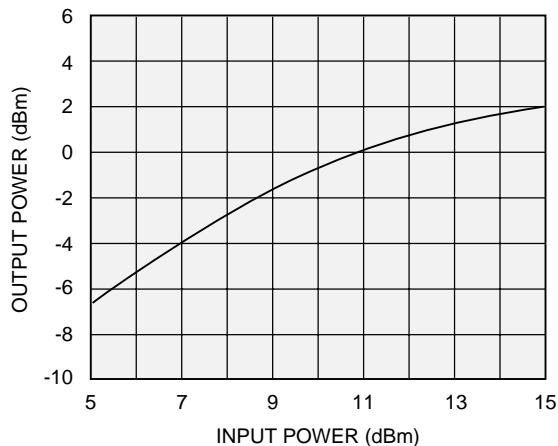

($P_{IN} = +10 \text{ dBm}$)

MX2D

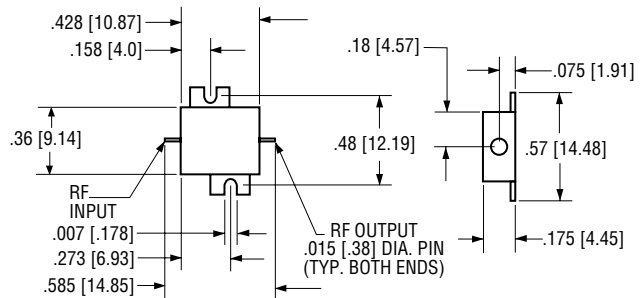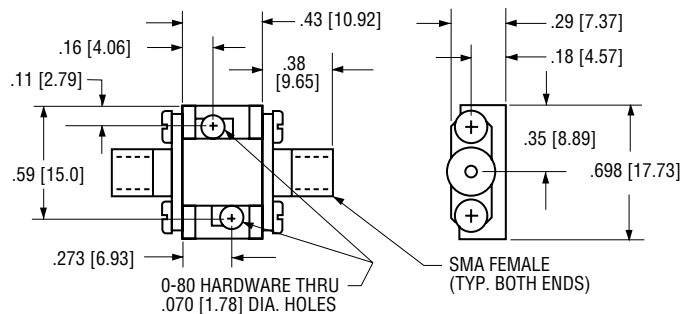

Notes:

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ±0.01 [.xx = ±0.25]
.xxx = ±0.005 [.xxx = ±0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Doubler may be readily used as is, or as a drop-in by removing the SMA connectors and mounting hardware as shown.

ACTIVE FREQUENCY DOUBLERS


MODEL: MAX2M020040

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------|
| Input frequency range | 1 – 2 GHz minimum |
| Output frequency range | 2 – 4 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |



OUTPUT POWER VS. FREQUENCY

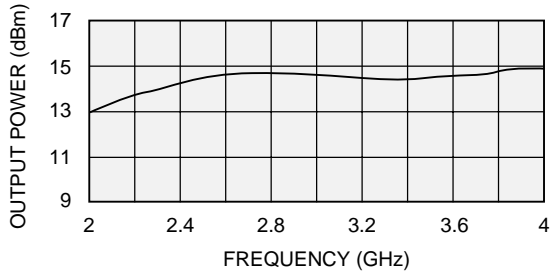


FUNDAMENTAL REJECTION VS. FREQUENCY

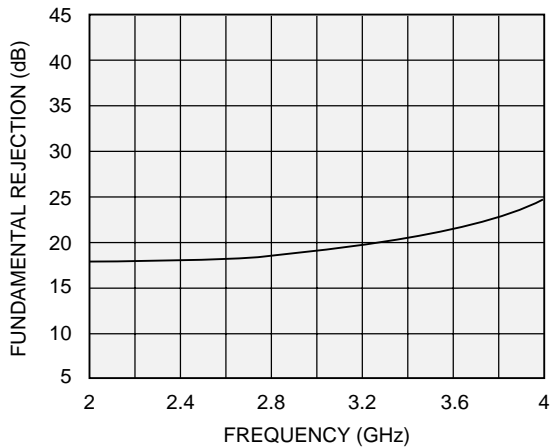

($P_{IN} = +10$ dBm)

MAX2A

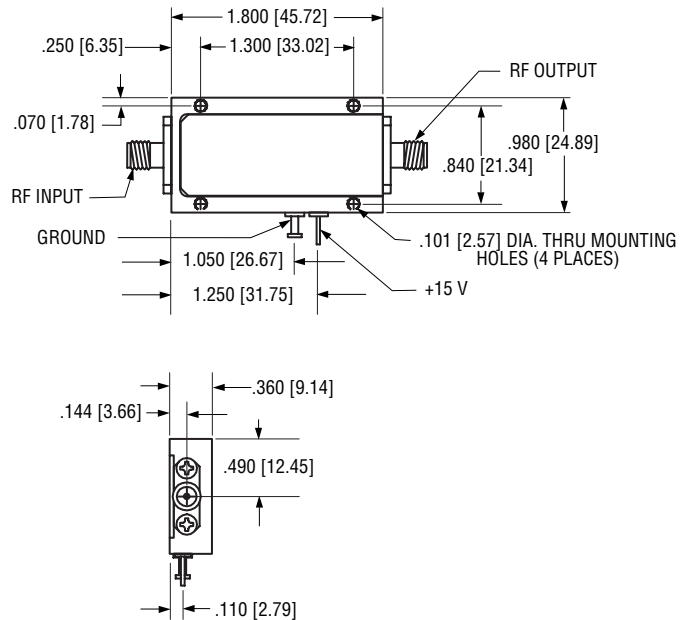

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M040080

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------|
| Input frequency range | 2 – 4 GHz minimum |
| Output frequency range | 4 – 8 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |

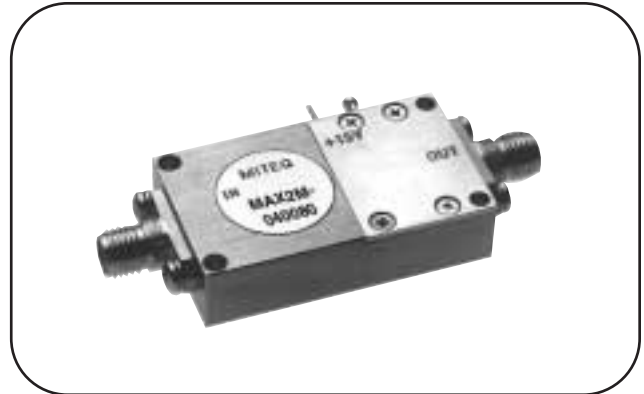

OUTPUT POWER VS. FREQUENCY

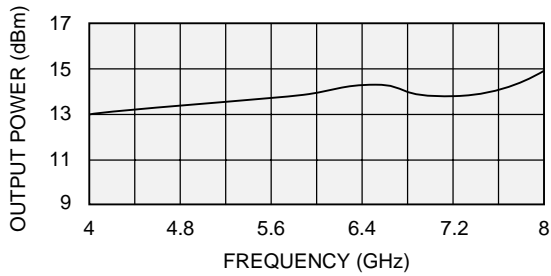


FUNDAMENTAL REJECTION VS. FREQUENCY

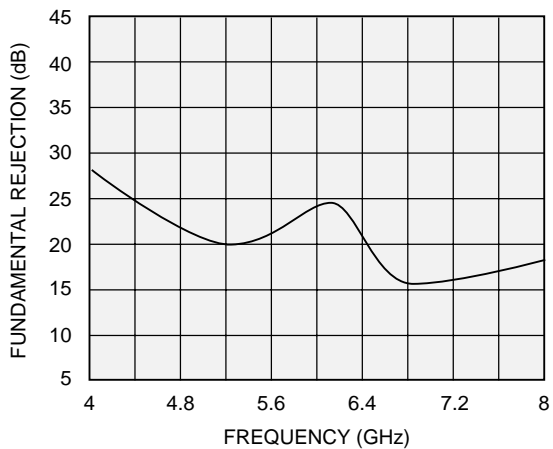

($P_{IN} = +10 \text{ dBm}$)

MAX2B

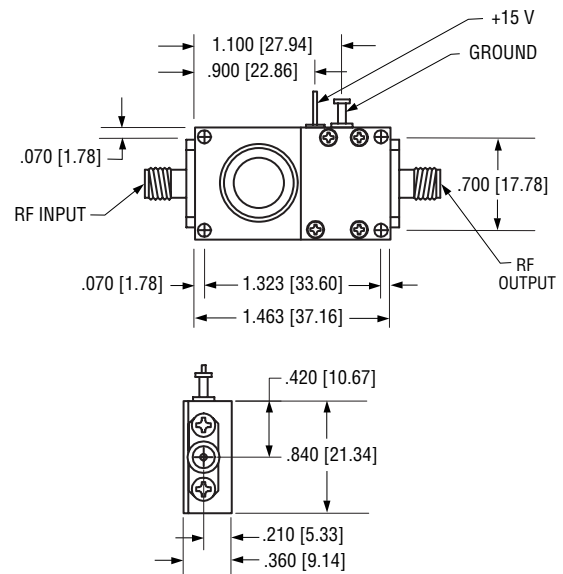

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M080160

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------|
| Input frequency range | 4 – 8 GHz minimum |
| Output frequency range | 8 – 16 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |

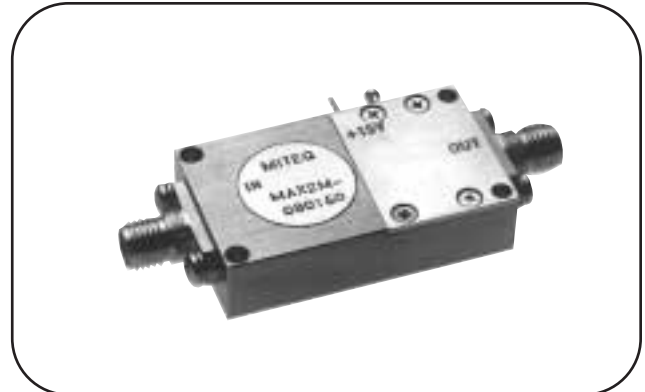

OUTPUT POWER VS. FREQUENCY

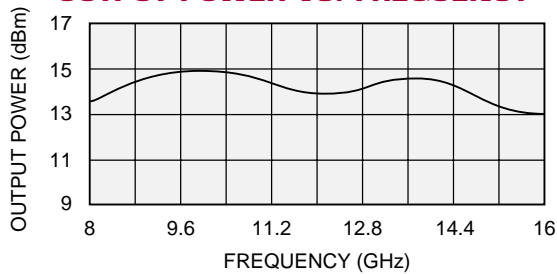


FUNDAMENTAL REJECTION VS. FREQUENCY

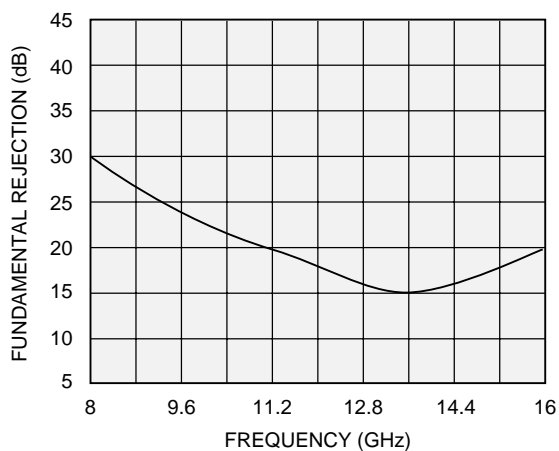

($P_{IN} = +10$ dBm)

MAX2B

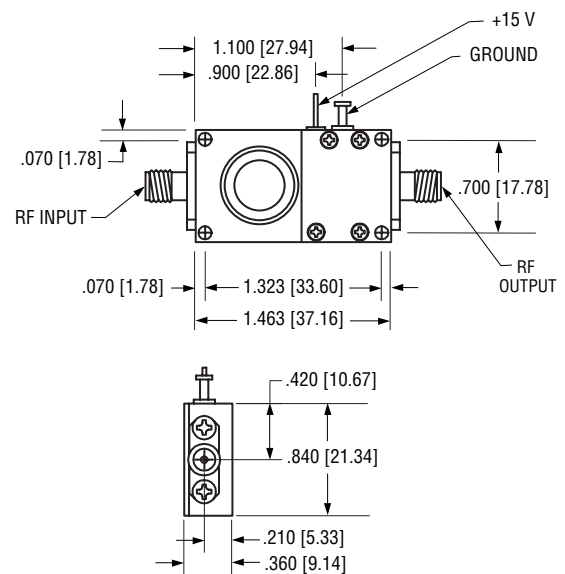

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M130260

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|----------------------|
| Input frequency range | 6.5 – 13 GHz minimum |
| Output frequency range | 13 – 26 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |

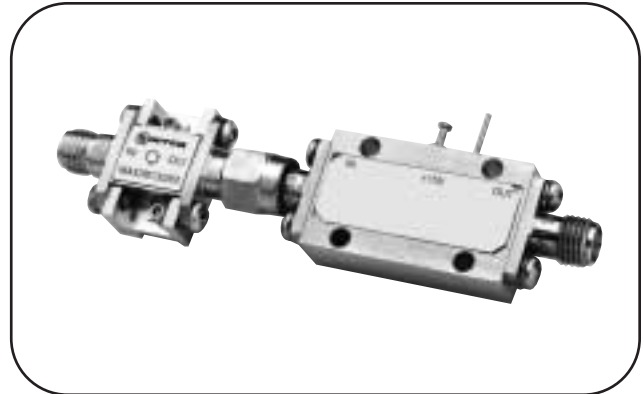

OUTPUT POWER VS. FREQUENCY

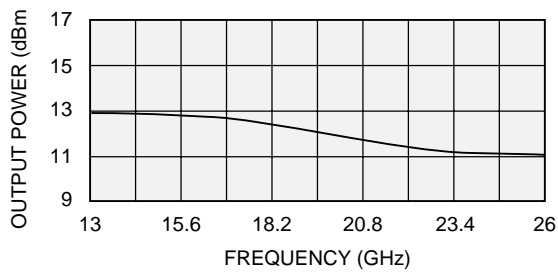


FUNDAMENTAL REJECTION VS. FREQUENCY

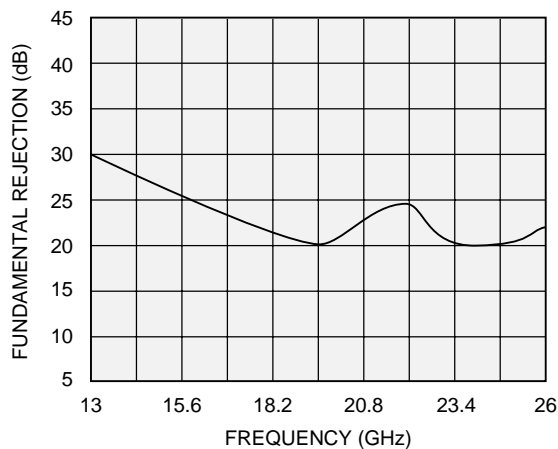

($P_{IN} = +10$ dBm)

MAX2C

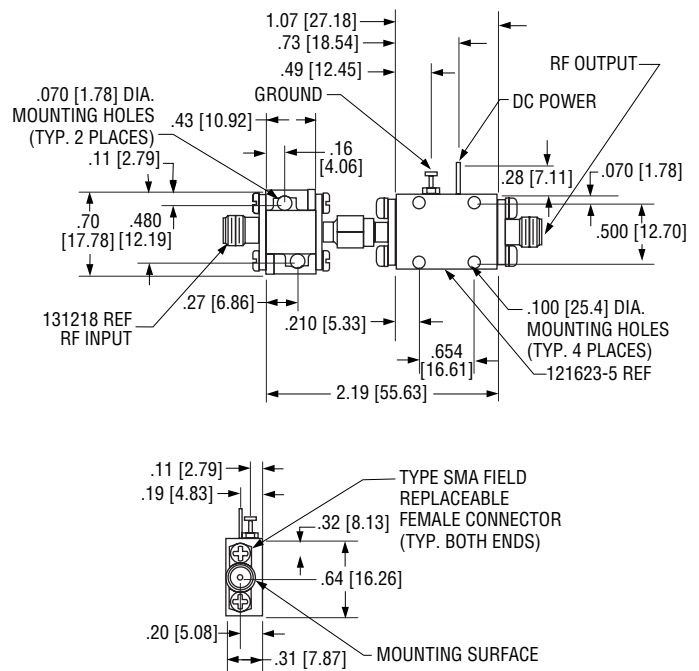

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ±0.01 [.xx = ±0.25]
.xxx = ±0.005 [.xxx = ±0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M200400

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 10 – 20 GHz minimum |
| Output frequency range | 20 – 40 GHz minimum |
| Input power range | 10 – 15 dBm nominal |
| Harmonic rejection | |
| Fundamental | 18 dB typical |
| Odd harmonic | 18 dB typical |

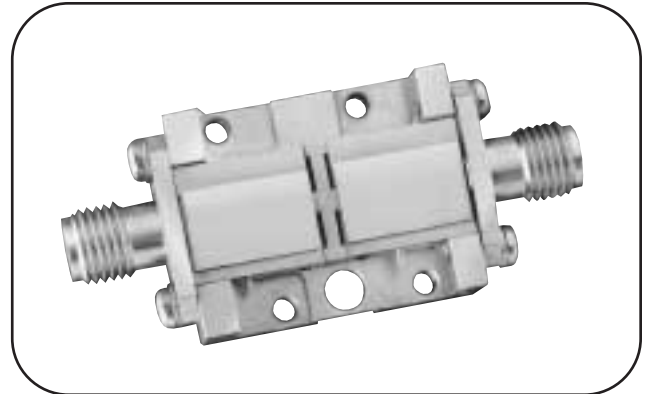

OUTPUT POWER VS. FREQUENCY

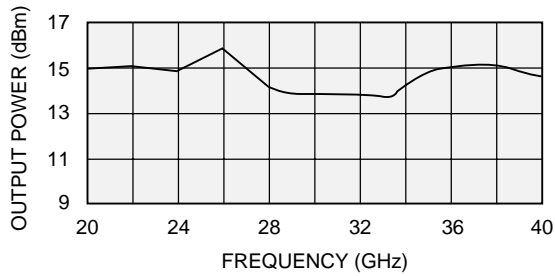


FUNDAMENTAL REJECTION VS. FREQUENCY

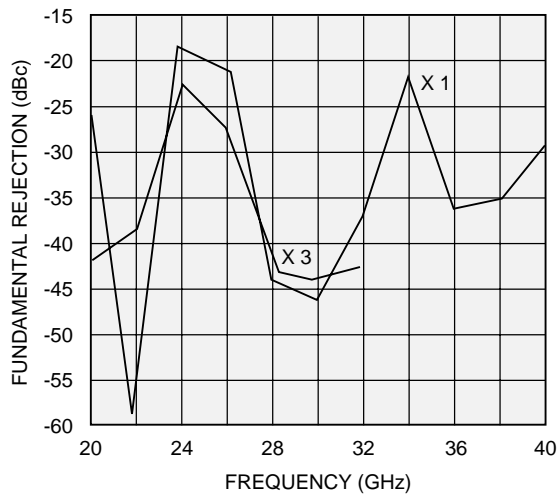

($P_{IN} = +10$ dBm)

MAX2F

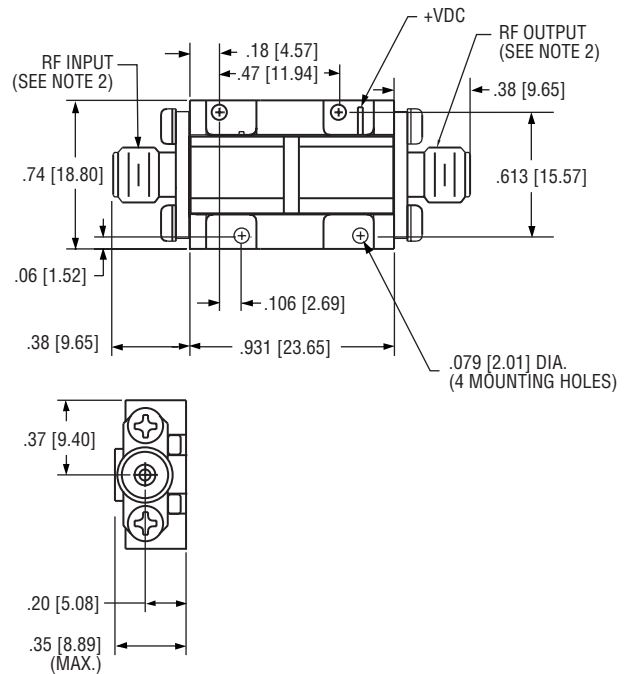

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional waveguide output available, please contact factory.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M260400

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 13 – 20 GHz minimum |
| Output frequency range | 26 – 40 GHz minimum |
| Input power range | 10 – 15 dBm nominal |
| Harmonic rejection | |
| Fundamental | 18 dB typical |
| Odd harmonic | 18 dB typical |

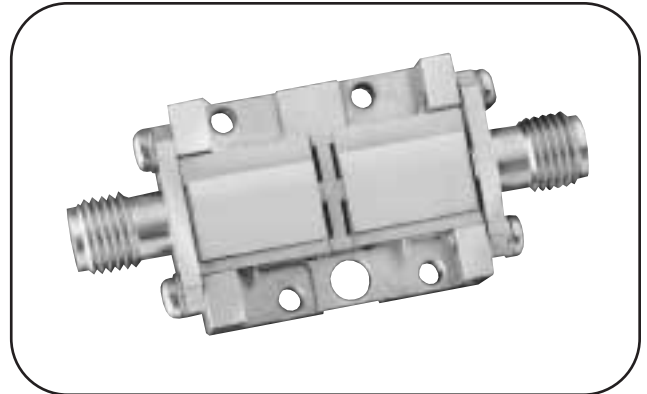

OUTPUT POWER VS. FREQUENCY

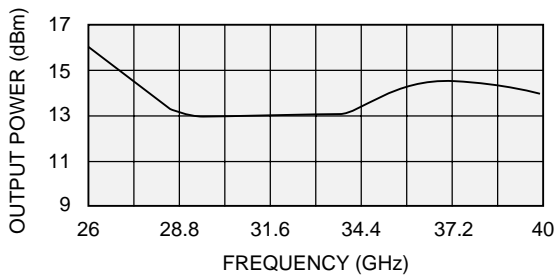


FUNDAMENTAL REJECTION VS. FREQUENCY

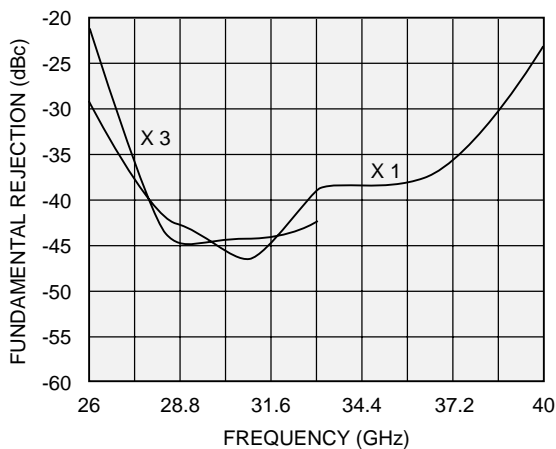

($P_{IN} = +10 \text{ dBm}$)

MAX2F

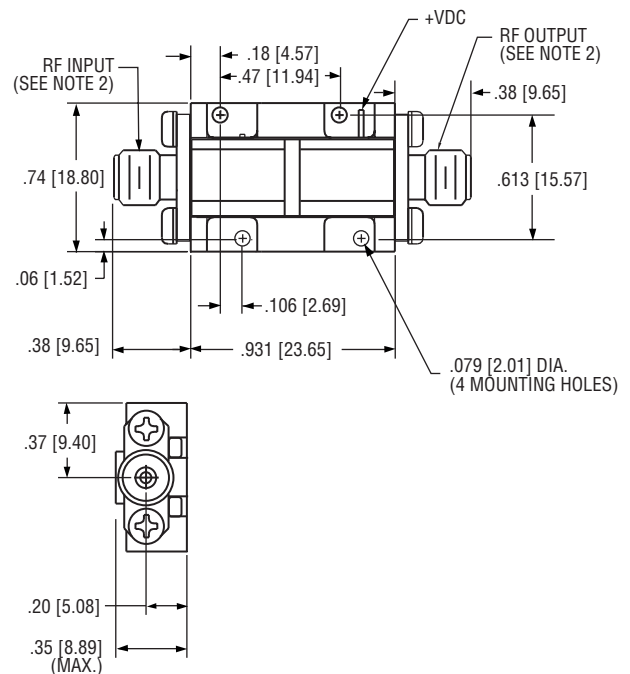

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional waveguide output available, please contact factory.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M260400W (WAVEGUIDE WR28 OUTPUT)

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 13 – 20 GHz minimum |
| Output frequency range | 26 – 40 GHz minimum |
| Input power range | 10 – 15 dBm nominal |
| Harmonic rejection | |
| Fundamental | > 20 dB typical |
| Odd harmonic | > 20 dB typical |

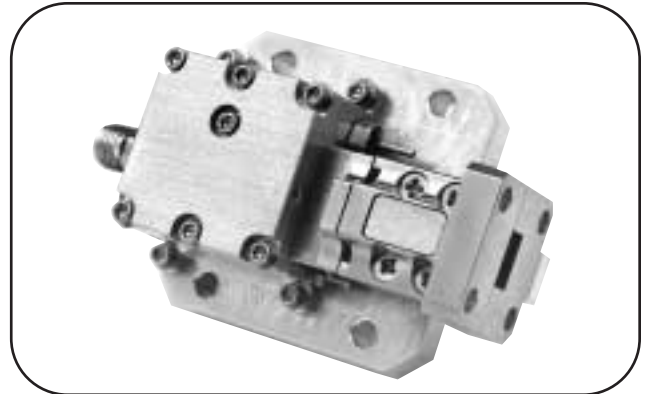

OUTPUT POWER VS. FREQUENCY



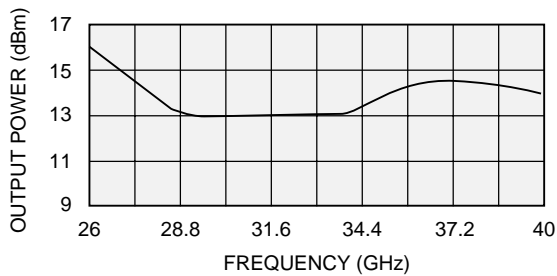


FUNDAMENTAL REJECTION VS. FREQUENCY

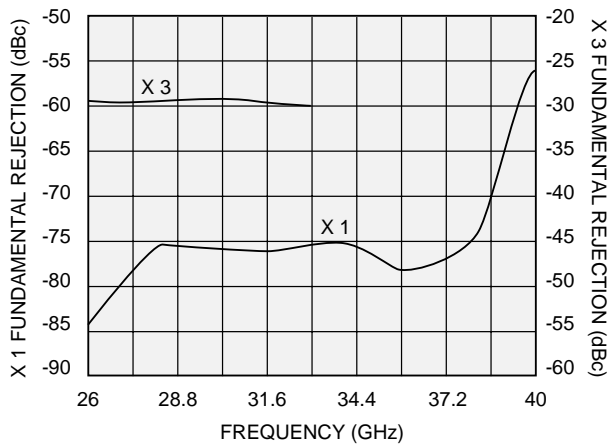

($P_{IN} = +10$ dBm)

MAX2G

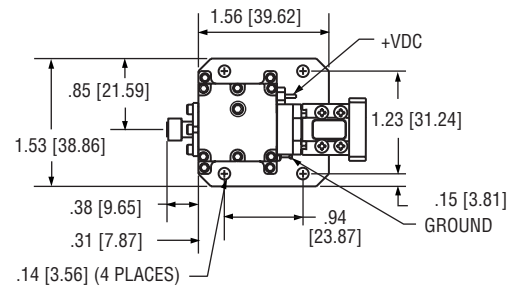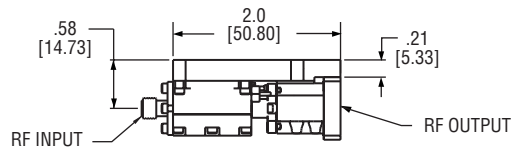

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M300500

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 15 – 25 GHz minimum |
| Output frequency range | 30 – 50 GHz minimum |
| Input power range | 10 – 15 dBm nominal |
| Harmonic rejection | |
| Fundamental | 18 dB typical |
| Odd harmonic | 18 dB typical |

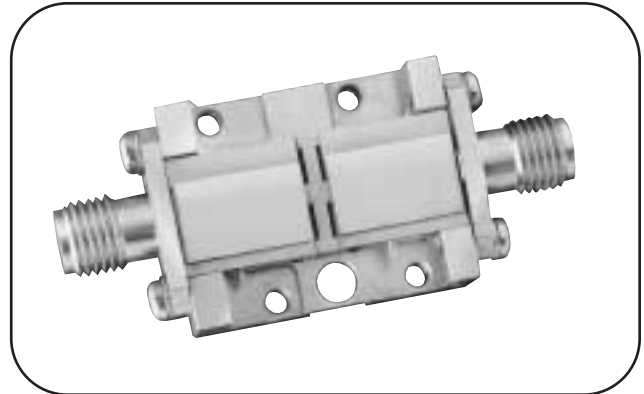

OUTPUT POWER VS. FREQUENCY

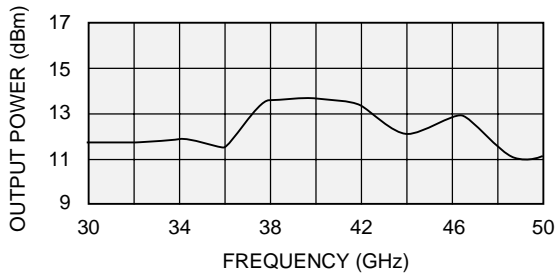


FUNDAMENTAL REJECTION VS. FREQUENCY

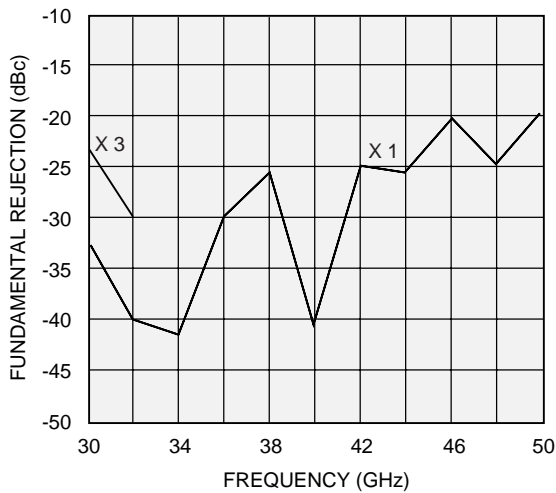

($P_{IN} = +10$ dBm)

MAX2F

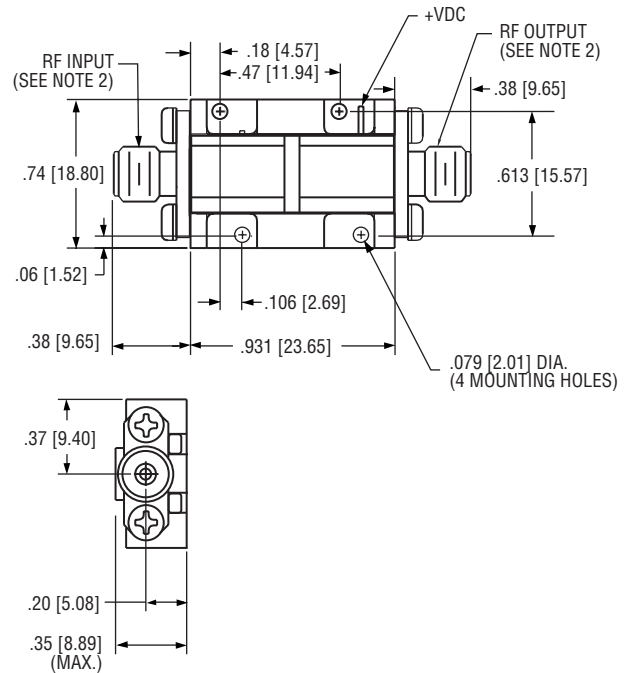

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional waveguide output available, please contact factory.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M360500

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 18 – 25 GHz minimum |
| Output frequency range | 36 – 50 GHz minimum |
| Input power range | 10 – 15 dBm nominal |
| Harmonic rejection | |
| Fundamental | 18 dB typical |
| Odd harmonic | 18 dB typical |

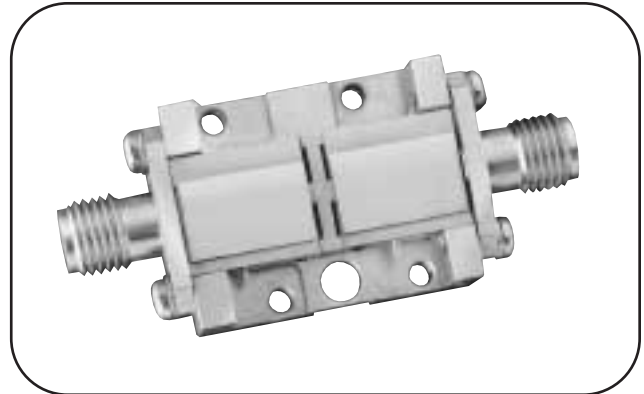

OUTPUT POWER VS. FREQUENCY

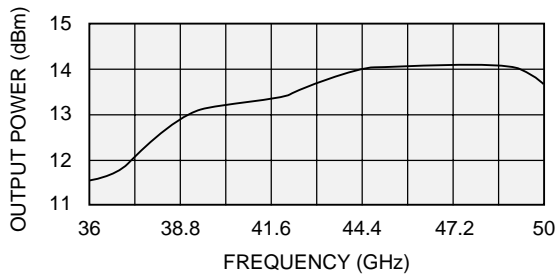


FUNDAMENTAL REJECTION VS. FREQUENCY

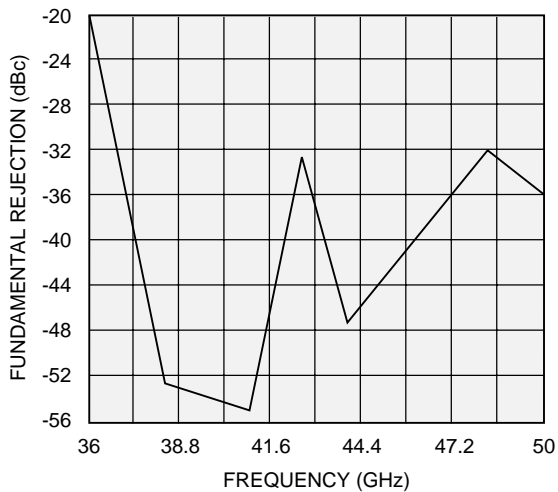

($P_{IN} = +10$ dBm)

MAX2F

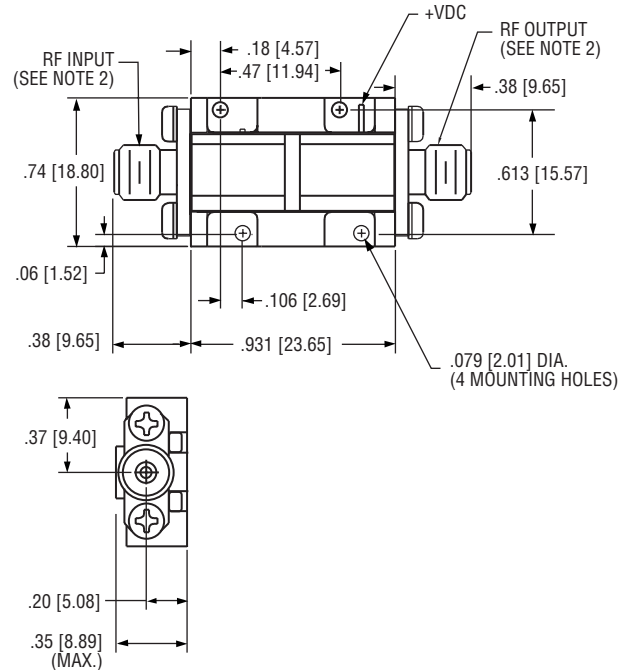

Notes:

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ±0.01 [.xx = ±0.25]
.xxx = ±0.005 [.xxx = ±0.13]
- Optional SMA, K or V type male connectors in either input, output or both.
- Optional waveguide output available, please contact factory.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M010060

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 0.5 – 3 GHz minimum |
| Output frequency range | 1 – 6 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 20 dB typical |
| Odd harmonic | 20 dB typical |



OUTPUT POWER VS. FREQUENCY

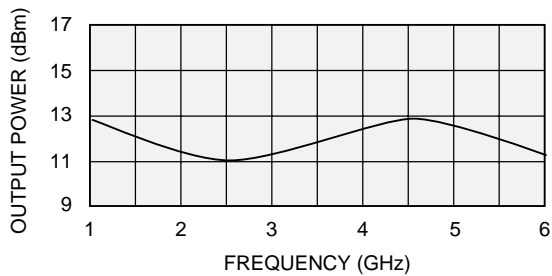


FUNDAMENTAL REJECTION VS. FREQUENCY

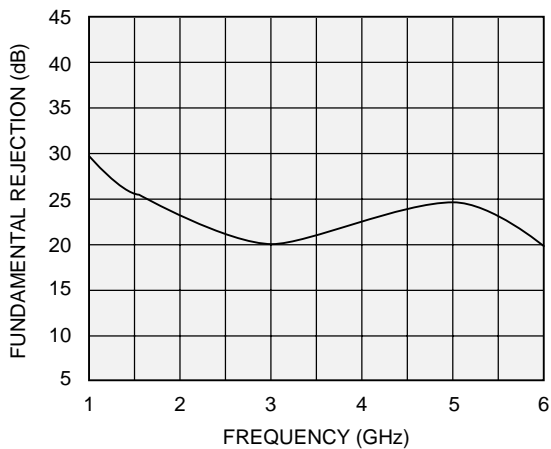

($P_{IN} = +10$ dBm)

MAX2A

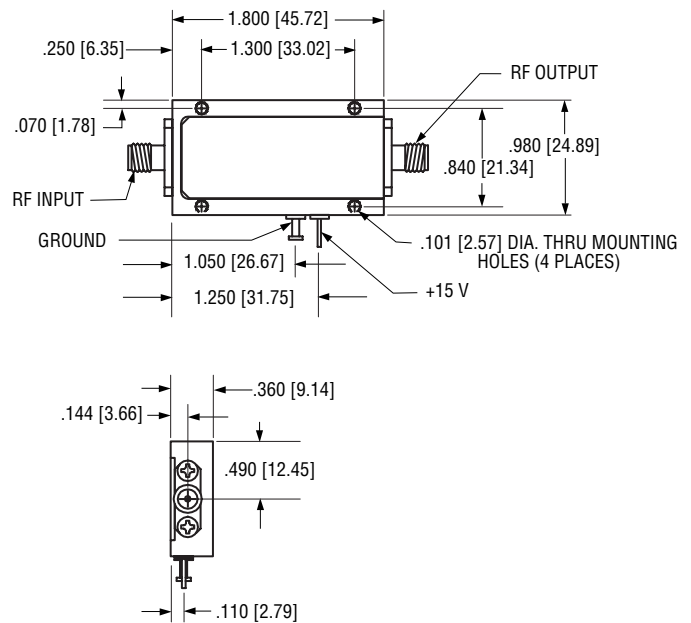

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ±0.01 [.xx = ±0.25]
.xxx = ±0.005 [.xxx = ±0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M030180

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|---------------------|
| Input frequency range | 1.5 – 9 GHz minimum |
| Output frequency range | 3 – 18 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 15 dB typical |
| Odd harmonic | 20 dB typical |

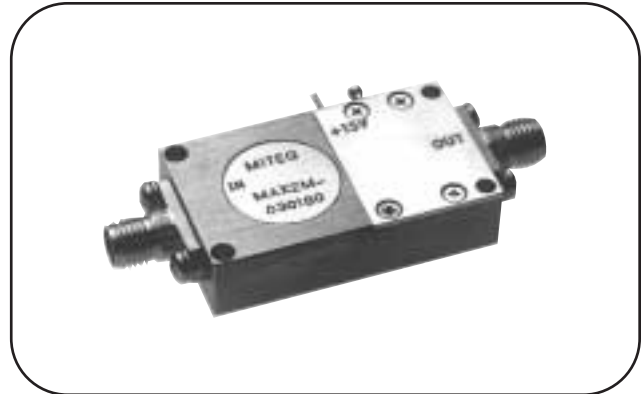

OUTPUT POWER VS. FREQUENCY

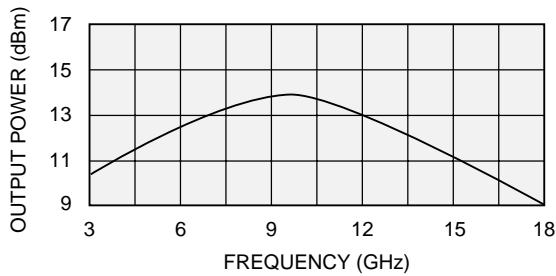


FUNDAMENTAL REJECTION VS. FREQUENCY

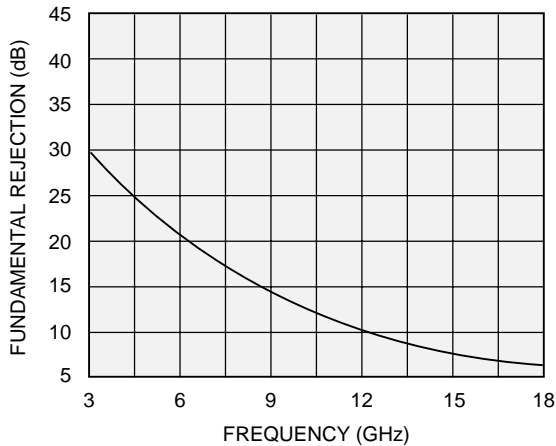

($P_{IN} = +10$ dBm)

MAX2B

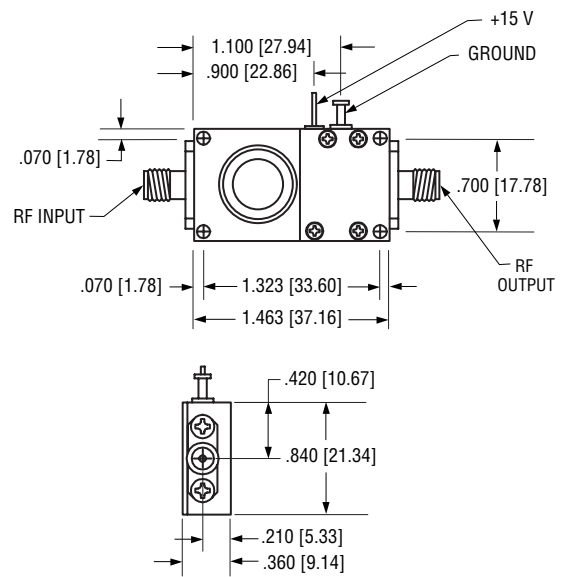

Notes:


- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

ACTIVE FREQUENCY DOUBLERS (CONT.)


MODEL: MAX2M060260

ELECTRICAL SPECIFICATIONS


| | |
|------------------------|--------------------|
| Input frequency range | 3 – 13 GHz minimum |
| Output frequency range | 6 – 26 GHz minimum |
| Input power range | 8 – 12 dBm nominal |
| Conversion loss | 0 dB typical |
| Harmonic rejection | |
| Fundamental | 12 dB typical |
| Odd harmonic | 15 dB typical |

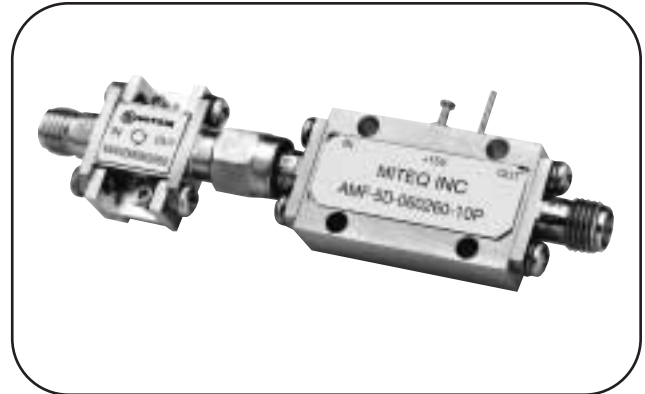

OUTPUT POWER VS. FREQUENCY

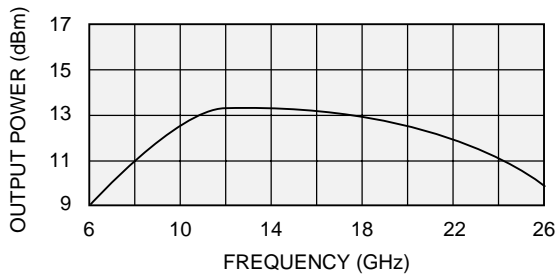


FUNDAMENTAL REJECTION VS. FREQUENCY

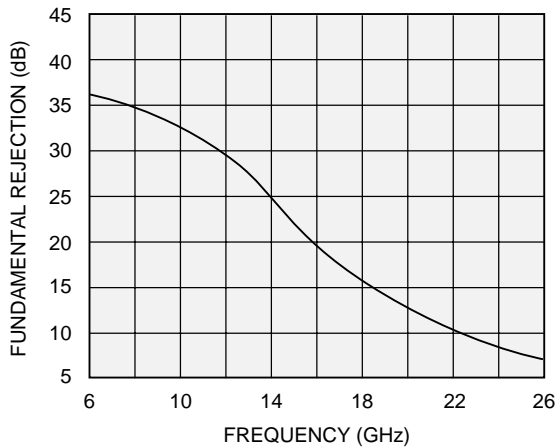

($P_{IN} = +10$ dBm)

MAX2C

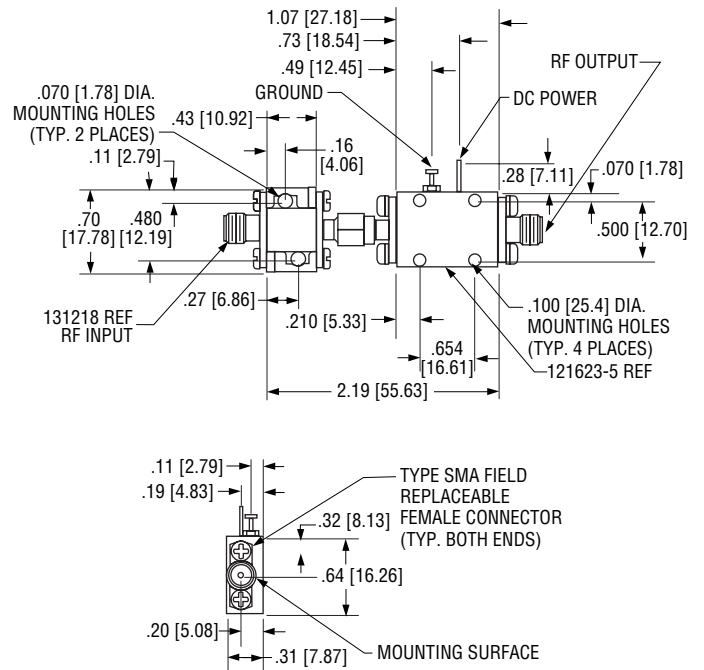

Notes:

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ±0.01 [.xx = ±0.25]
.xxx = ±0.005 [.xxx = ±0.13]
- Optional SMA, K or V type male connectors in either input, output or both.


ACTIVE MULTIPLIER ASSEMBLIES

9 TO 11.4 GHz, LOW OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|----------------------|
| Input frequency | 3 – 3.8 GHz minimum |
| Input power | +12 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 9 – 11.4 GHz minimum |
| Output power | +5 dBm minimum |
| Output power flatness (at +25°C) | ±2.5 dB maximum |
| Output spurious rejection | -50 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -50 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 150 mA |

SWEPT OUTPUT POWER

(with +12 dBm input)

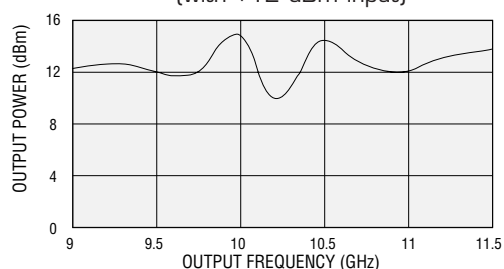


X 3 ACTIVE MULTIPLIER ASSEMBLIES

OPTIONS

- Input Power +5 to +20 dBm

FUNCTIONAL BLOCK DIAGRAM




12.9 TO 14.7 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|-------------------------|
| Input frequency | 4.3 – 4.9 GHz minimum |
| Input power | +10 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 12.9 – 14.7 GHz minimum |
| Output power | +15 dBm minimum |
| Output power flatness (at +25°C) | ±1 dB maximum |
| Output spurious rejection | -50 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -50 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 150 mA |

SWEPT OUTPUT POWER

(with +10 dBm input)

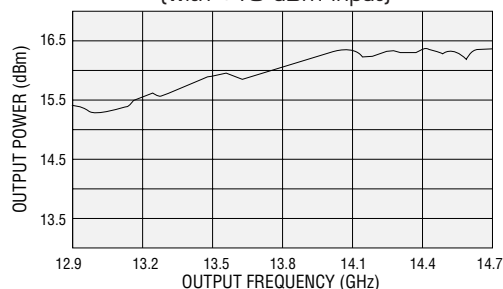


13.8 TO 16.2 GHz, LOW OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|-------------------------|
| Input frequency | 4.6 – 5.4 GHz minimum |
| Input power | +12 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 13.8 – 16.2 GHz minimum |
| Output power | 0 dBm minimum |
| Output power flatness (at +25°C) | ±1.25 dB maximum |
| Output spurious rejection | -50 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -50 dBc typical |
| Output VSWR | 2:1 typical |
| DC power | +15 VDC, 150 mA |

SWEPT OUTPUT POWER

(with +12 dBm input)

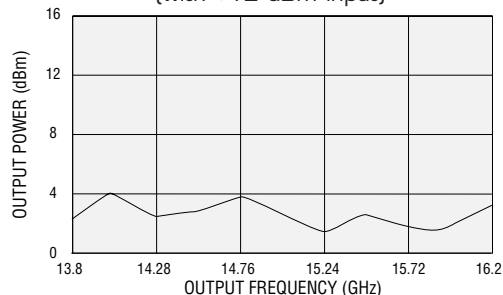


ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

5 TO 5.5 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|--------------------------|
| Input frequency | 1.25 – 1.375 GHz minimum |
| Input power | +10 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 5 – 5.5 GHz minimum |
| Output power | +14 dBm minimum |
| Output power flatness (at +25°C) | ±1.5 dB maximum |
| Output spurious rejection | -60 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -50 dBc typical |
| Output VSWR | 2:1 typical |
| DC power | +15 VDC, 250 mA |

SWEPT OUTPUT POWER

(with +10 dBm input)

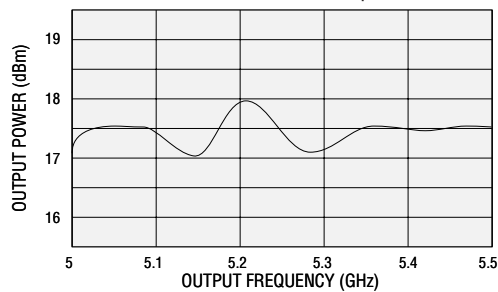


X 4 ACTIVE MULTIPLIER ASSEMBLIES

OPTIONS

- Input Power +5 to +20 dBm

FUNCTIONAL BLOCK DIAGRAM




6.2 TO 7.1 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|-------------------------|
| Input frequency | 1.55 – 1.78 GHz minimum |
| Input power | +10 dBm typical |
| Input VSWR | 2:1 typical |
| Output frequency | 6.2 – 7.1 GHz minimum |
| Output power | +10 dBm minimum |
| Output power flatness (at +25°C) | ±2 dB maximum |
| Output spurious rejection | -65 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 250 mA |

SWEPT OUTPUT POWER

(with +10 dBm input)

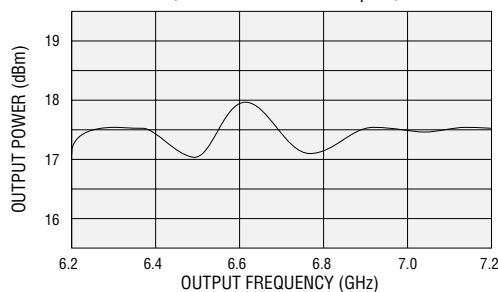


40 TO 48 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|---------------------|
| Input frequency | 10 – 12 GHz minimum |
| Input power | +10 dBm minimum |
| Output frequency | 40 – 48 GHz minimum |
| Output power | +8 dBm minimum |
| Output power flatness (at +25°C) | ±2 dB maximum |
| Output spurious rejection | -60 dBc typical |
| Rejection of input harmonics | -18 dBc typical |
| DC power | +15 VDC, 200 mA |

SWEPT OUTPUT POWER

(with +10 dBm input)

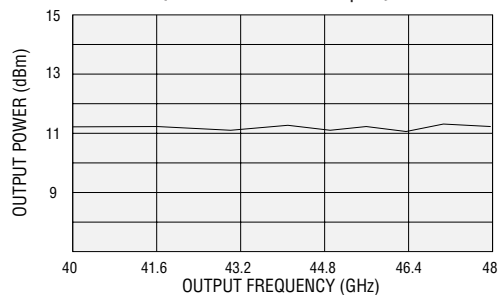


ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

9.75 TO 10.5 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|---------------------------|
| Input frequency | 2.437 – 2.626 GHz minimum |
| Input power | +7 dBm minimum |
| Input VSWR | 2.5:1 typical |
| Output frequency | 9.75 – 10.5 GHz minimum |
| Output power | +10 dBm minimum |
| Output power flatness (at +25°C) | ±2 dB maximum |
| Output spurious rejection | -65 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 250 mA |

SWEEPED OUTPUT POWER

(with +7 dBm input)

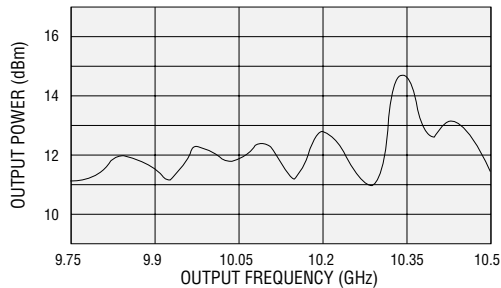


12.71 TO 13.28 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|---------------------------|
| Input frequency | 3.1775 – 3.32 GHz minimum |
| Input power | +12 dBm minimum |
| Input VSWR | 2.5:1 typical |
| Output frequency | 12.71 – 13.28 GHz minimum |
| Output power | +13 dBm minimum |
| Output power flatness (at +25°C) | ±1 dB maximum |
| Output spurious rejection | -65 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 250 mA |

SWEEPED OUTPUT POWER

(with +12 dBm input)

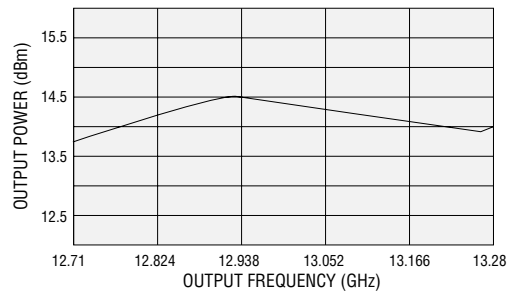


ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

6.5 TO 7.5 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|-----------------------|
| Input frequency | 1.3 – 1.5 GHz minimum |
| Input power | +10 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 6.5 – 7.5 GHz minimum |
| Output power | +14 dBm minimum |
| Output power flatness (at +25°C) | ±1.5 dB maximum |
| Output spurious rejection | -40 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -40 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 250 mA |

SWEPT OUTPUT POWER

(with +10 dBm input)

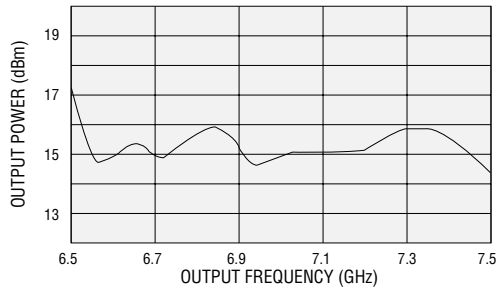


X 5 ACTIVE MULTIPLIER ASSEMBLIES

OPTIONS

- Input Power +5 to +20 dBm

FUNCTIONAL BLOCK DIAGRAM




9.75 TO 11.375 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|---------------------------|
| Input frequency | 1.95 – 2.275 GHz minimum |
| Input power | +10 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 9.75 – 11.375 GHz minimum |
| Output power | +10 dBm minimum |
| Output power flatness (at +25°C) | ±1 dB maximum |
| Output spurious rejection | -65 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC, 150 mA |

SWEPT OUTPUT POWER

(with +10 dBm input)

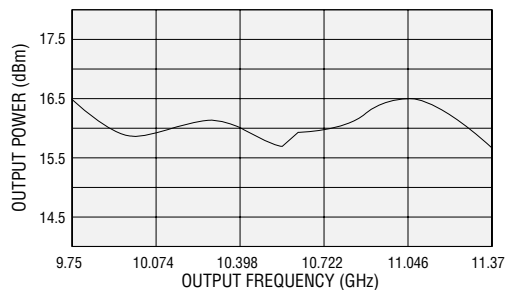

ACTIVE MULTIPLIER ASSEMBLIES (CONT.)


ELECTRICAL SPECIFICATIONS

| | |
|---------------------------|---------------------------|
| Input | 1280 MHz @ 10 dBm minimum |
| Output | 6400 MHz @ 10 dBm minimum |
| Input harmonic rejection | -80 dBc |
| Output harmonic rejection | -20 dBc |
| DC power | +5 VDC @ 280 mA |

This unit is hermetically sealed for flight applications. For outline refer to MAX5B.

X 5 ACTIVE MULTIPLIER ASSEMBLIES

INSIDE VIEW SHOWING GENERAL LAYOUT CONCEPT

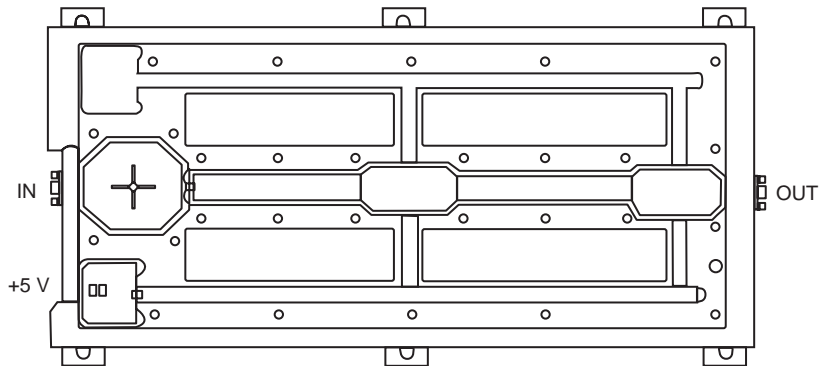


ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

12.6 TO 13.2 GHz, HIGH OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|-------------------------|
| Input frequency | 2.1 – 2.2 GHz minimum |
| Input power | +10 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 12.6 – 13.2 GHz minimum |
| Output power | +20 dBm minimum |
| Output power flatness (at +25°C) | ±1 dB maximum |
| Output spurious rejection | -65 dBc typical |
| Output harmonic rejection | -15 dBc typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC |

SWEPT OUTPUT POWER

(with +10 dBm input)

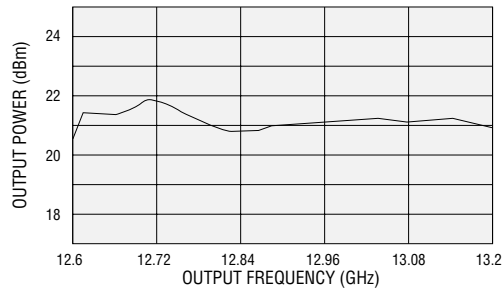


X 6 ACTIVE MULTIPLIER ASSEMBLIES

OPTIONS

- Input Power +5 to +20 dBm

FUNCTIONAL BLOCK DIAGRAM




ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

1.36 TO 1.56 GHz, HIGH OUTPUT LEVEL ELECTRICAL SPECIFICATIONS


| | |
|----------------------------------|---------------------------|
| Input frequency | 0.085 – 0.097 GHz minimum |
| Input power | -12 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 1.36 – 1.56 GHz minimum |
| Output power | +20 dBm minimum |
| Output power flatness (at +25°C) | ±2 dB maximum |
| Output spurious rejection | -65 dBc typical |
| Output harmonic rejection | -20 dBc typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC |

SWEPT OUTPUT POWER (with -12 dBm input)

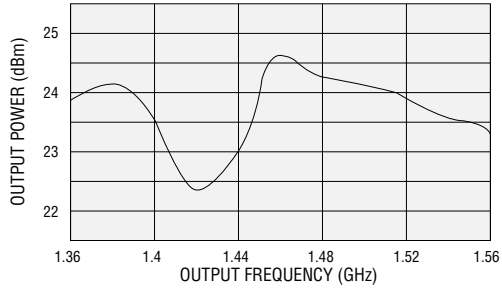

X 16 ACTIVE MULTIPLIER ASSEMBLIES

FUNCTIONAL BLOCK DIAGRAM

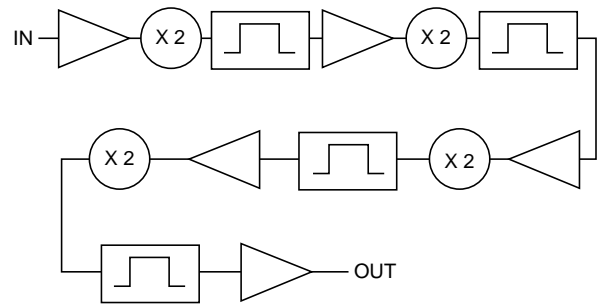


ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

6.36 TO 6.86 GHz, HIGH OUTPUT LEVEL ELECTRICAL SPECIFICATIONS

| | |
|--|---------------------------|
| Input frequency | 0.397 – 0.428 GHz minimum |
| Input power | +7 dBm |
| Input VSWR | 2:1 typical |
| Output frequency | 6.36 – 6.86 GHz minimum |
| Output power | +20 dBm minimum |
| Output power flatness (at +25°C) | ±0.5 dB maximum |
| Output spurious rejection | -70 dBc minimum |
| Output harmonic rejection | -40 dBc minimum |
| Rejection of input harmonics | -70 dBc typical |
| Output VSWR | 2:1 typical |
| Detected video output into 1K ohm load | 0.1 VDC |
| DC power | +15 VDC |

SWEPT OUTPUT POWER

(with +7 dBm input)

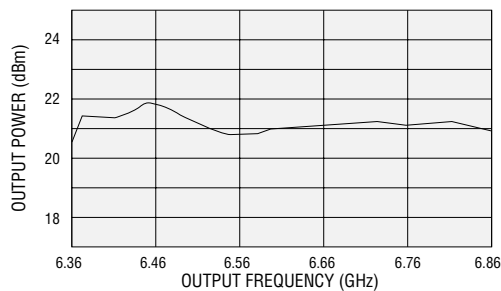


X 16 ACTIVE MULTIPLIER ASSEMBLIES

OPTIONS

- Input Power +5 to +20 dBm
- Detector Output

FUNCTIONAL BLOCK DIAGRAM

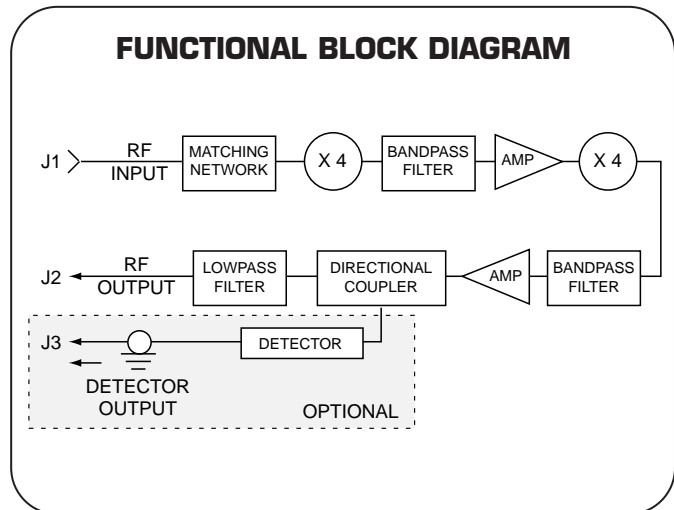


ACTIVE MULTIPLIER ASSEMBLIES (CONT.)

2.7 TO 2.945 GHz, MID OUTPUT LEVEL ELECTRICAL SPECIFICATIONS


| | |
|----------------------------------|----------------------------|
| Input frequency | 0.085 – 0.092 GHz minimum |
| Input power | -10 dBm minimum |
| Input VSWR | 2:1 typical |
| Output frequency | 2.7 – 2.945 GHz minimum |
| Output power | +10 dBm minimum |
| Output power flatness (at +25°C) | ±1.5 dB maximum |
| Output spurious rejection | -60 dBc to 8.8 GHz typical |
| Output harmonic rejection | -50 dBc to 8.8 GHz typical |
| Rejection of input harmonics | -65 dBc typical |
| Output VSWR | 1.5:1 typical |
| DC power | +15 VDC |

SWEEPED OUTPUT POWER

(with -10 dBm input)

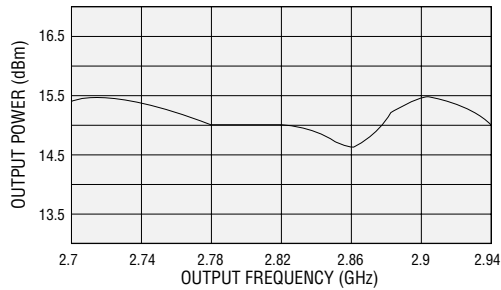


X 32 ACTIVE MULTIPLIER ASSEMBLIES

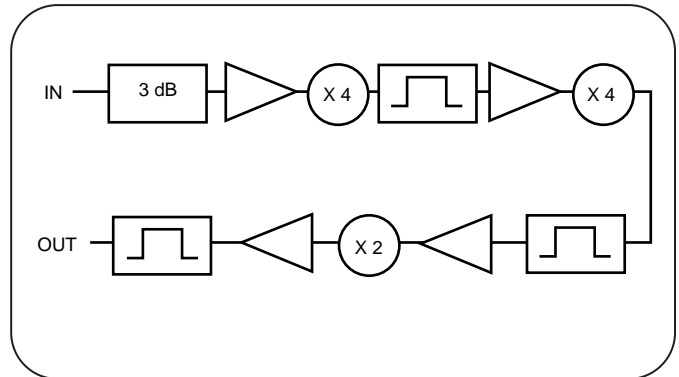

REJECTION OF INPUT HARMONICS

(with -10 dBm input)

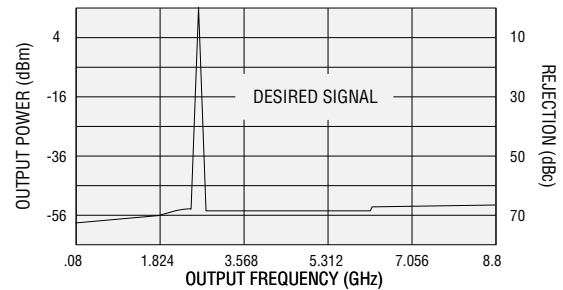


PASSIVE MULTIPLIERS - OUTLINE DRAWINGS


GENERAL NOTES

- Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
- Optional SMA, K or V type male connectors in either input, output or both.

MX2A

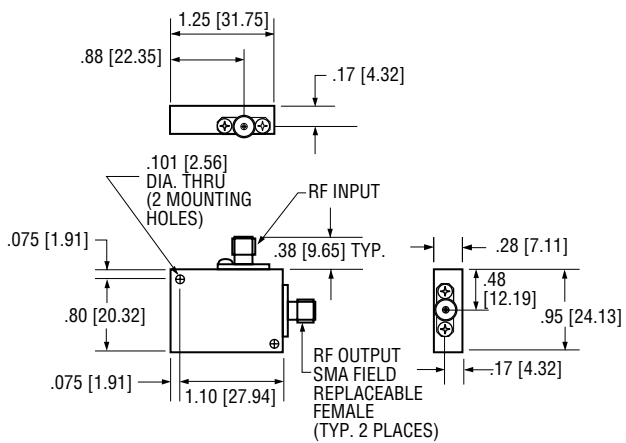


MX2B

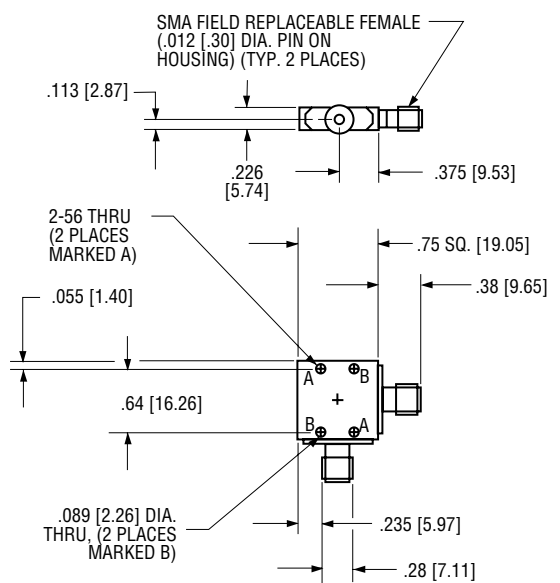


Notes: Optional MX2C package available, see outline section.

PASSIVE MULTIPLIERS - OUTLINE DRAWINGS (CONT.)

MX2C

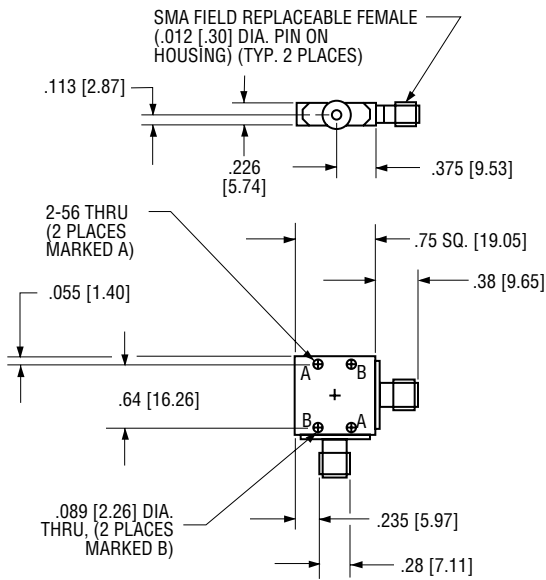


MX2D

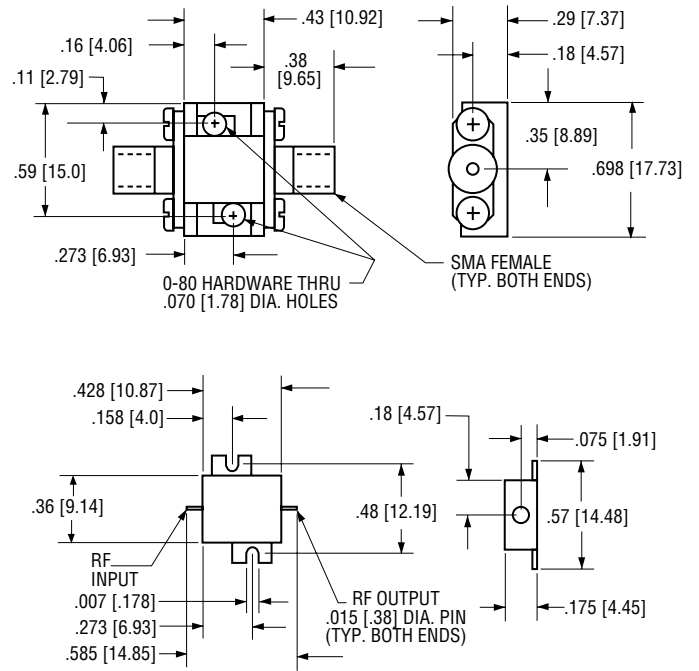

Notes: Doubler may be readily used as is, or as a drop-in by removing the SMA connectors and mounting hardware as shown.

MX2E

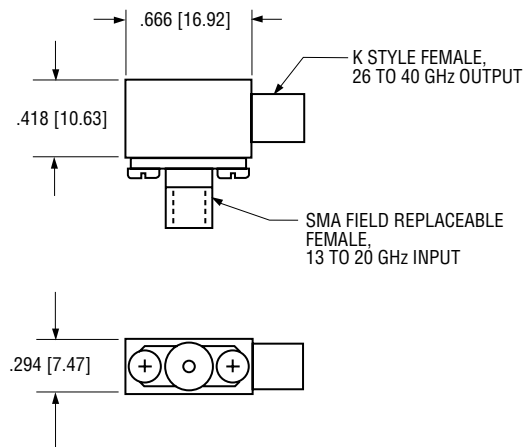


ACTIVE MULTIPLIERS – OUTLINE DRAWINGS


GENERAL NOTES

1. Dimensions are in inches [millimeters]
Tolerance as follows:
.xx = ± 0.01 [.xx = ± 0.25]
.xxx = ± 0.005 [.xxx = ± 0.13]
2. Optional SMA, K or V type male connectors in either input, output or both.

MAX2A


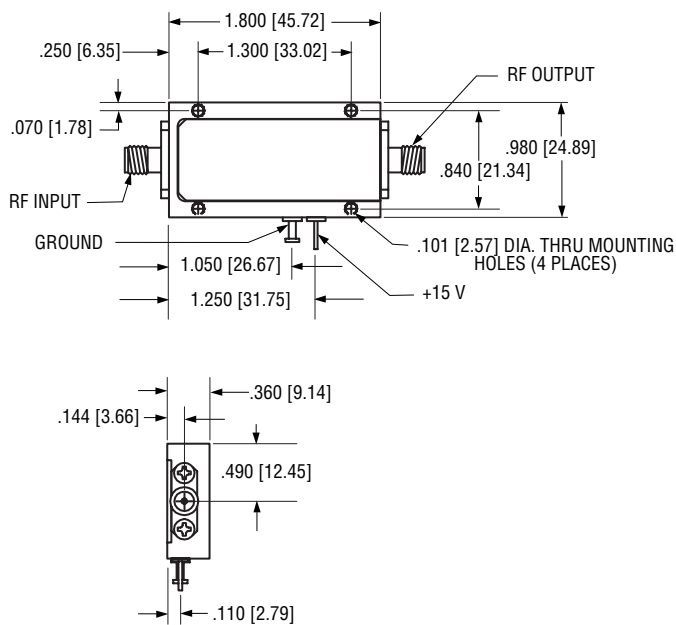


MAX2B


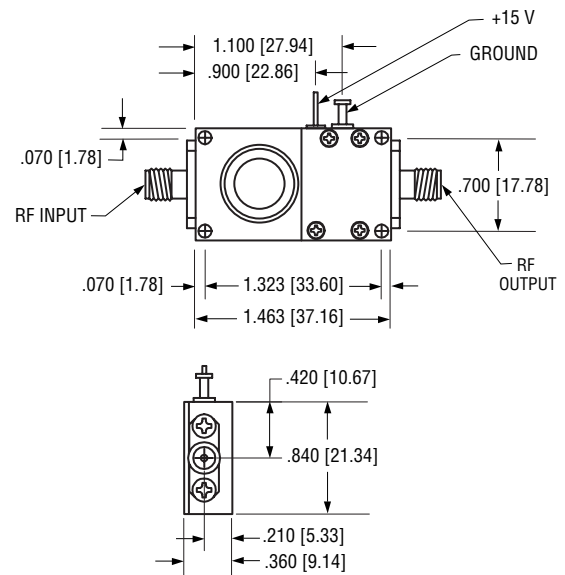


ACTIVE MULTIPLIERS - OUTLINE DRAWINGS (CONT.)


MAX2C

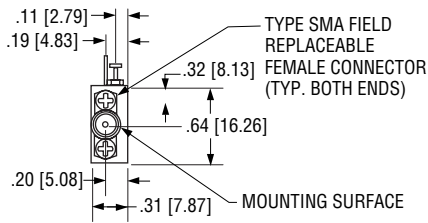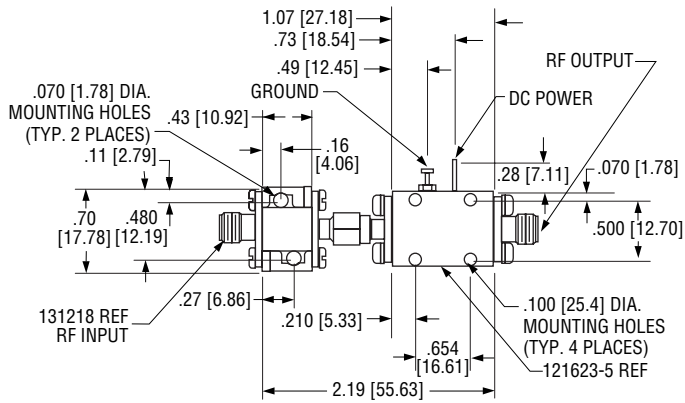


MAX2C2

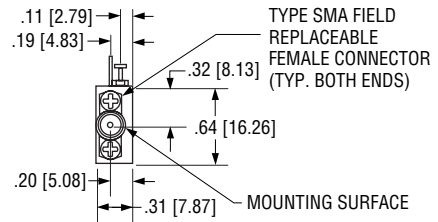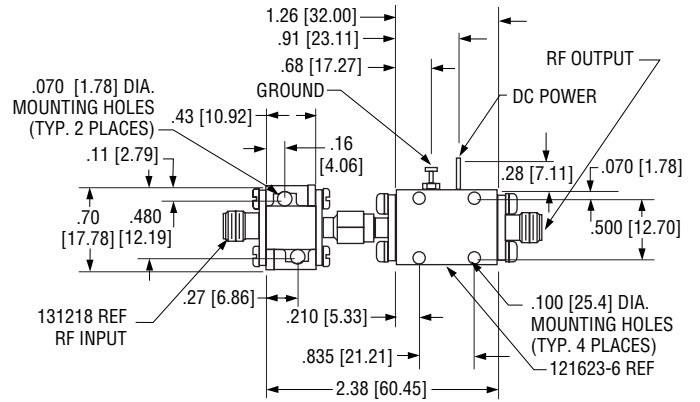

MAX2D

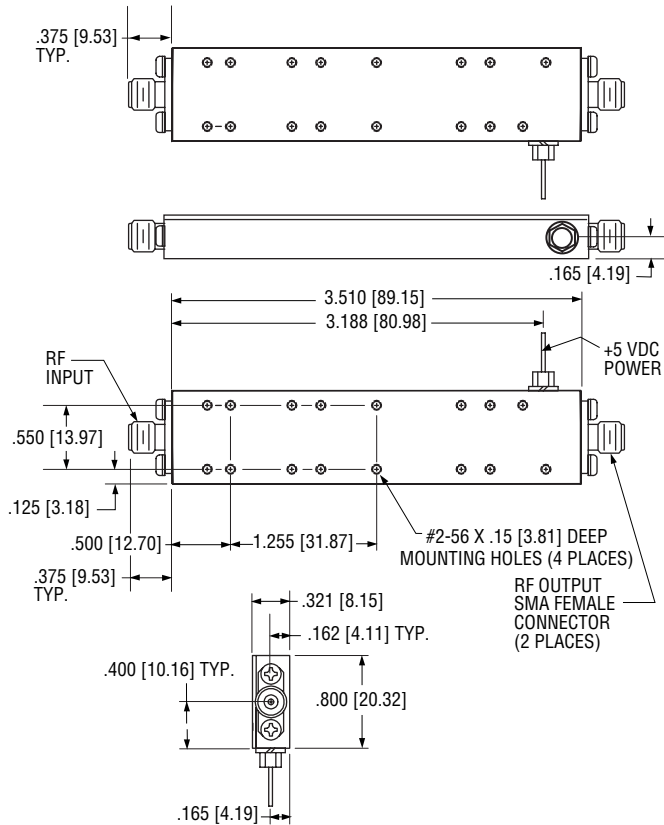


MAX2E

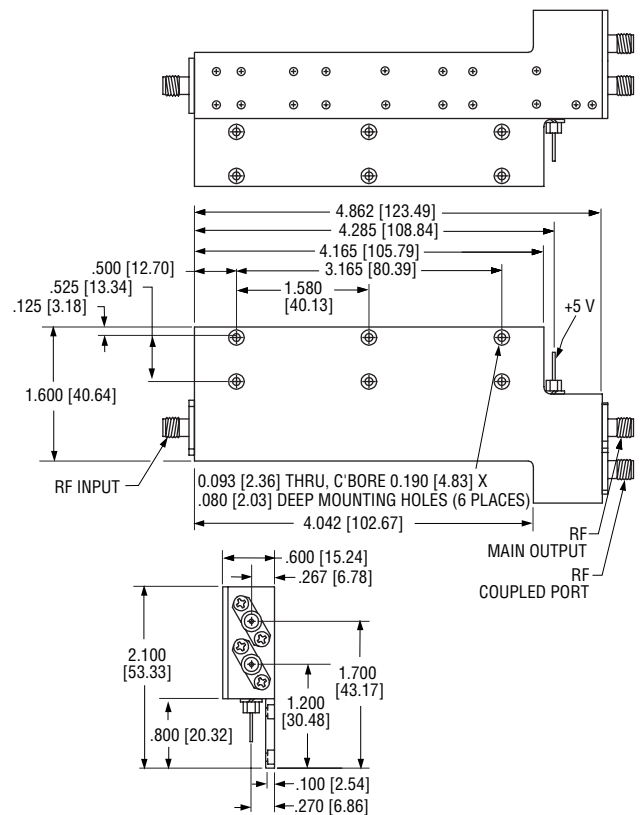


ACTIVE MULTIPLIERS – OUTLINE DRAWINGS (CONT.)

MAX2F

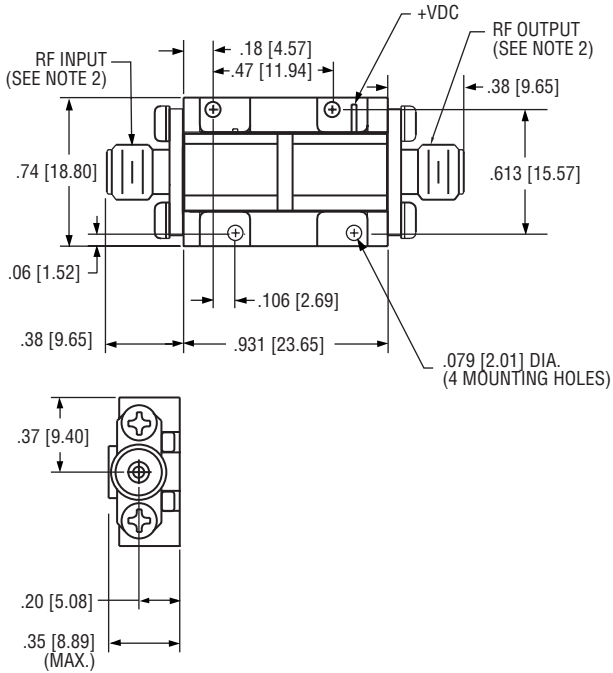


MAX2G

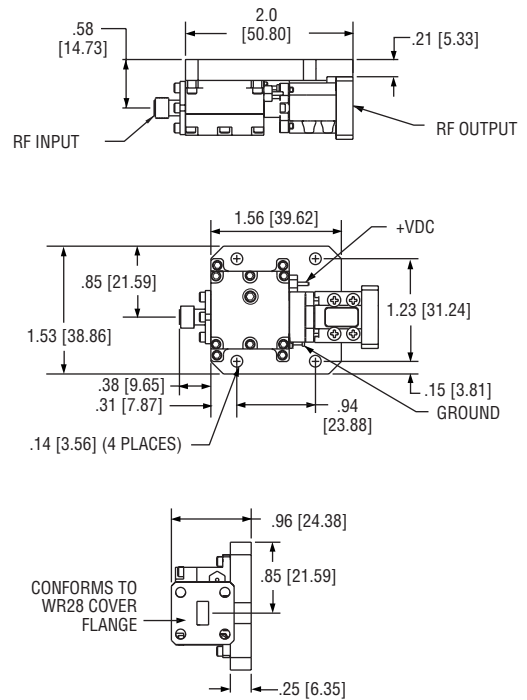


Notes: Optional waveguide output available, please contact factory.

MAX2H

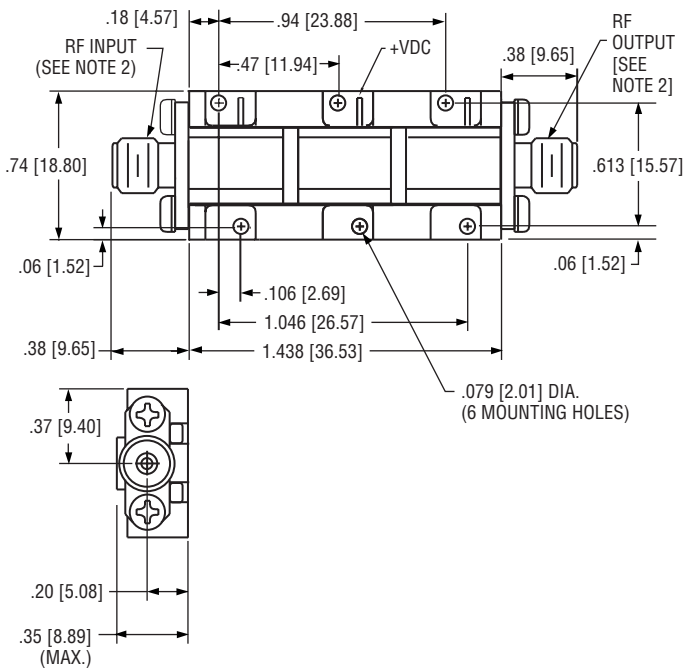


MAX2J

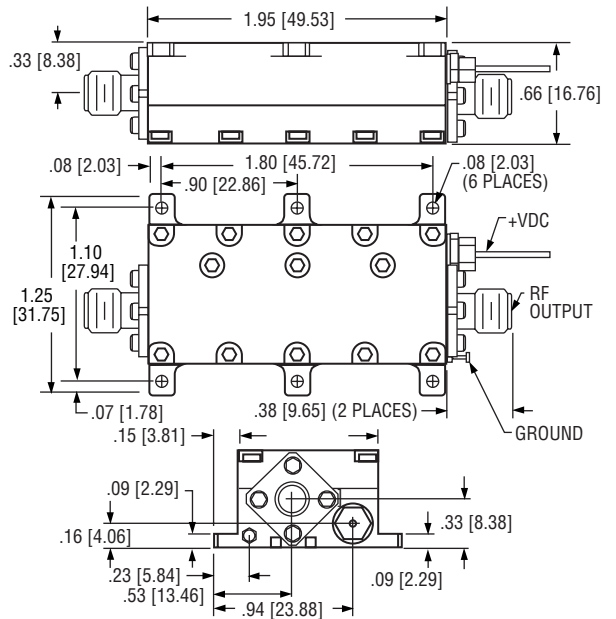


ACTIVE MULTIPLIERS - OUTLINE DRAWINGS (CONT.)


MAX3A

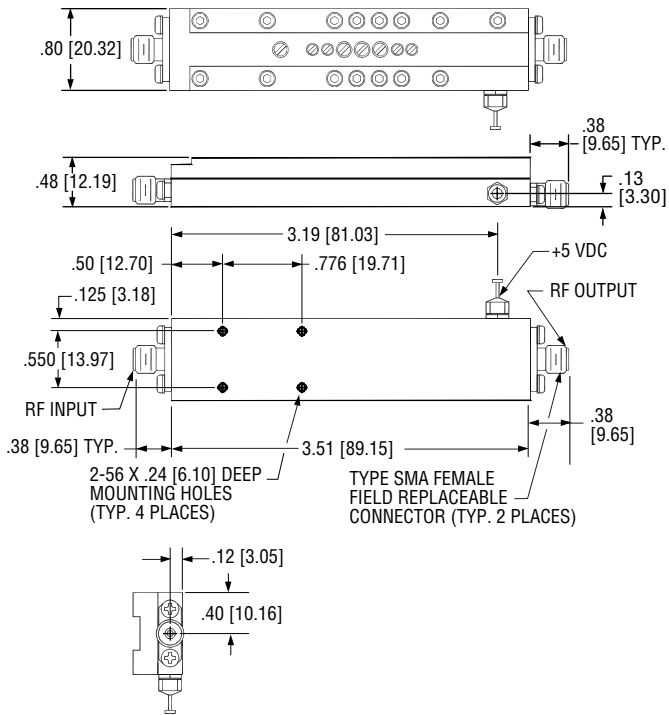


MAX4A

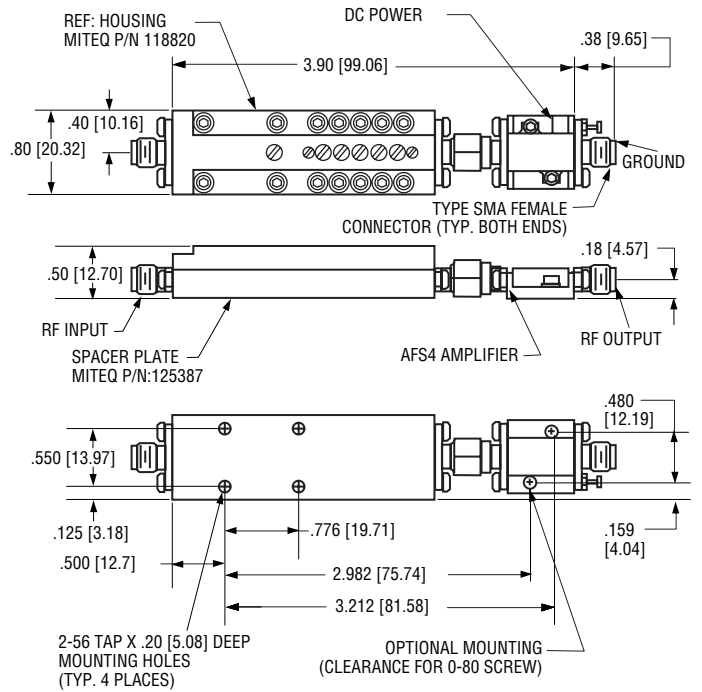

MAX4B

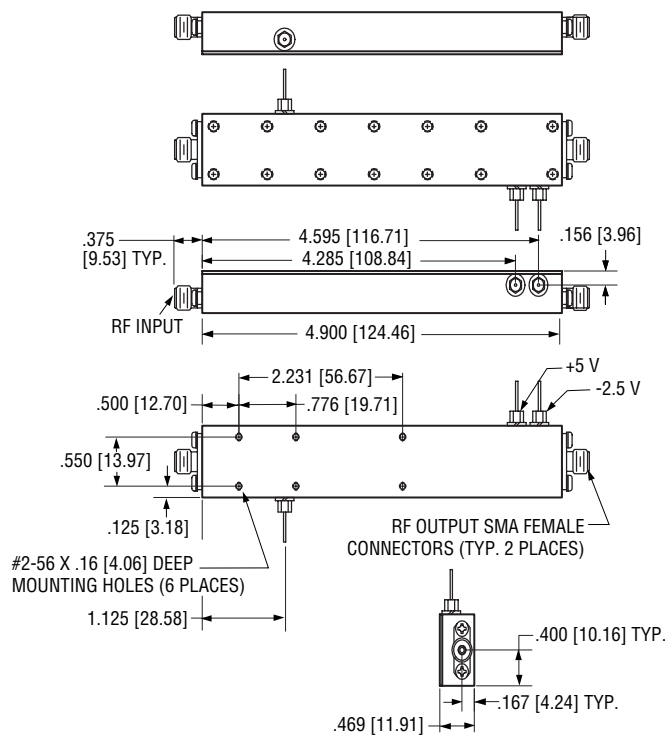


MAX4C

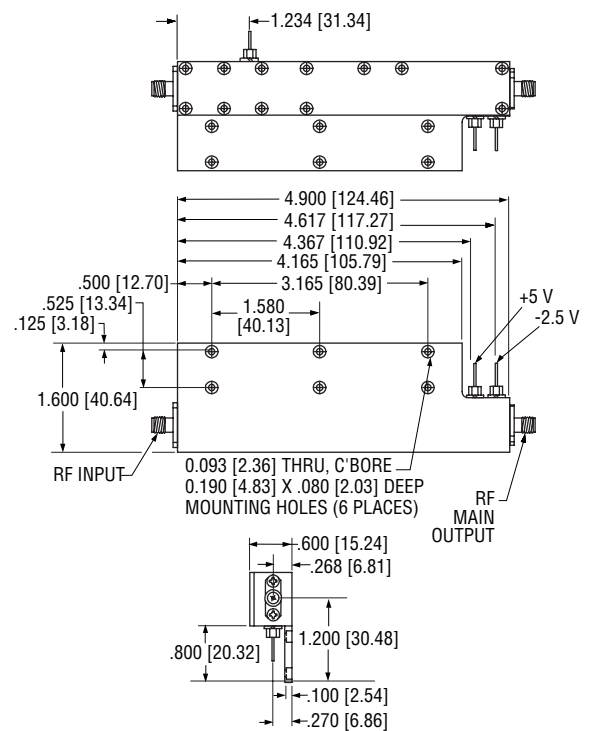


ACTIVE MULTIPLIERS - OUTLINE DRAWINGS (CONT.)


MAX4D

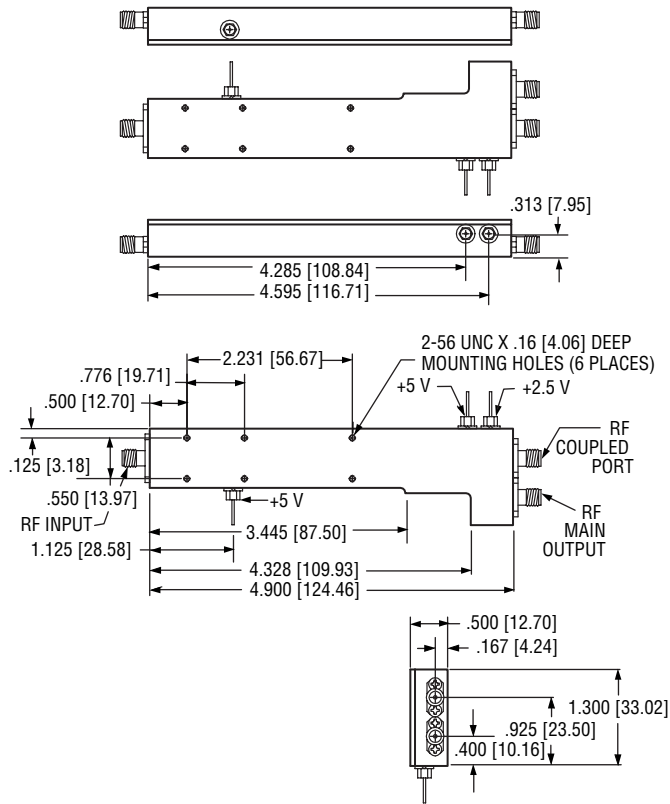


MAX4E

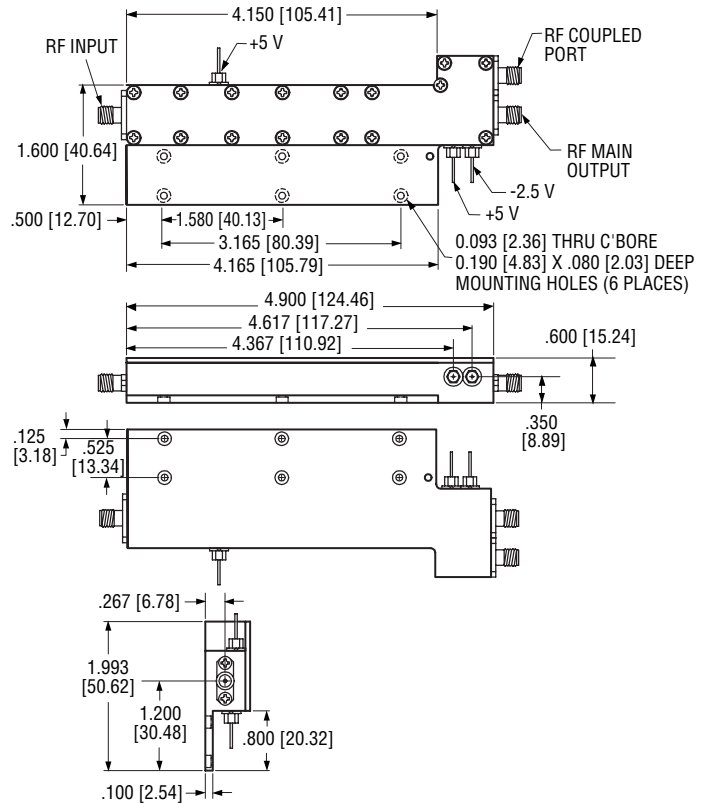

MAX5A

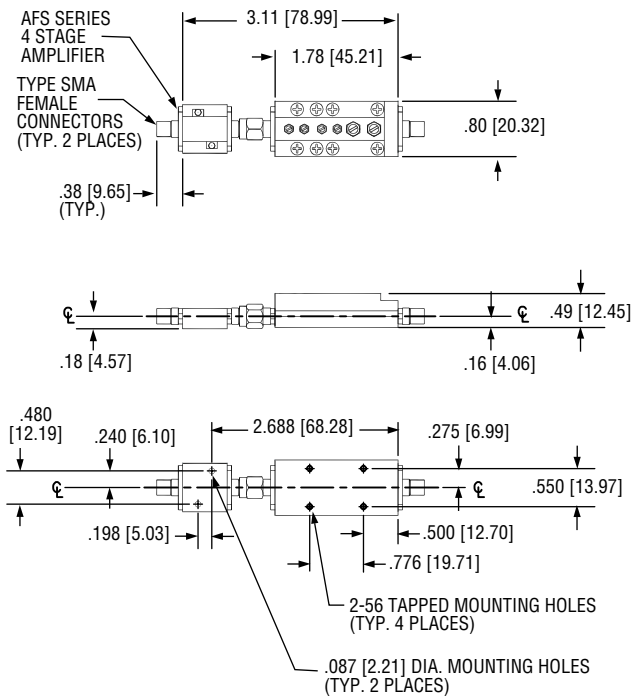

MAX5B

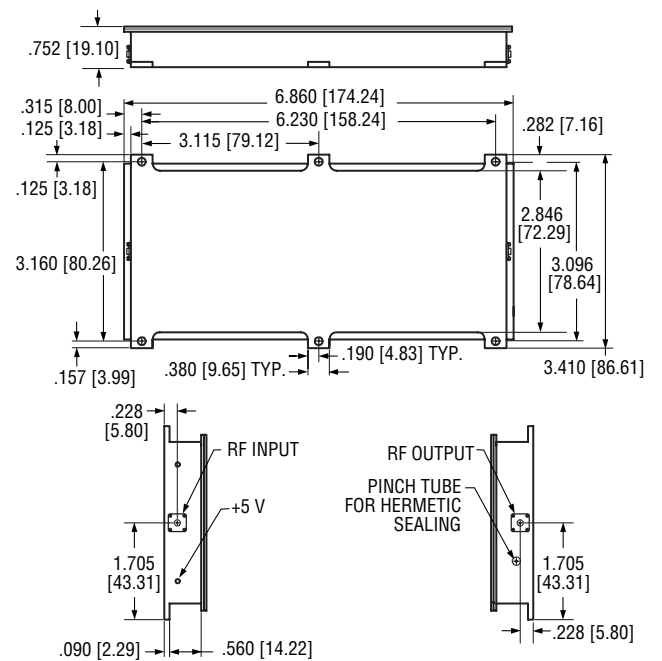

WARRANTY

1. MITEQ, Inc. warrants to the purchaser that each of its products, when shipped will be free from defects in material and workmanship and will perform in full accordance with applicable specifications. The limit of liability under this warranty is at MITEQ, Inc.'s option to repair or replace any product or part thereof which shall within: (a) three years of delivery for indoor equipment, (b) two years of delivery for outdoor equipment and (c) one year of delivery for integrated assemblies or equipment having RF output powers equal to or greater than +24 dBm, be returned by the purchaser to MITEQ, Inc., at 100 Davids Drive, Hauppauge, New York, 11788, and shall, as determined by examination by MITEQ, Inc., prove defective in material and/or workmanship. Warranty returns must first be authorized in writing by MITEQ, Inc. Disassembly of any MITEQ, Inc. product by anyone other than an authorized representative of MITEQ, Inc. voids this warranty in its entirety. MITEQ, Inc. reserves the right to make changes in any of its products without incurring any obligation to make the same changes on previously delivered products.
2. Components and subsystems having been repaired by MITEQ, Inc. shall be warranted for that repair for ninety (90) days. For products that are still within the original warranty period as described above, the original warranty (if longer) will take precedence. For all SATCOM products, that portion of the system that is repaired, will be warranted for one year.
3. As a condition to the warranties provided for herein, the Buyer will prepay the shipping charges for all products returned to MITEQ, Inc. for repair and MITEQ, Inc. will pay the return shipping with the exception of rack mountable hardware returned from outside the United States in which case the buyer will pay the shipping charges.
4. The buyer will pay the cost of inspecting and testing any goods returned under the warranty or otherwise which are found to meet the applicable specifications or which are not defective or not covered by the warranty.
5. Products sold by MITEQ, Inc. shall not be considered defective or non-conforming to the Buyers' order if they (a) satisfactorily fulfill the performance requirements that were (i) provided by the Buyer to MITEQ, Inc. or (ii) as published in the Sellers' product specification literature, or (b) or in accordance with any written or verbal agreement between the Buyer and MITEQ, Inc., or (c) are in accordance with samples approved by the Buyer. This warranty shall not apply to any products or parts thereof which have been subject to accident, negligence, alteration, abuse or misuse. MITEQ, Inc. makes no warranty whatsoever in respect to accessories or parts not supplied by it.
6. Limitations of Warranty, Damages and Liability

EXCEPT AS EXPRESSLY SET FORTH HEREIN, THERE ARE NO WARRANTIES, CONDITIONS, GUARANTEES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHER WARRANTIES, CONDITIONS, GUARANTEES OR REPRESENTATIONS, WHETHER EXPRESSED OR IMPLIED, IN LAW OR IN FACT, ORAL OR IN WRITING.

MITEQ, INC.'S AGGREGATE LIABILITY IN DAMAGES OR OTHERWISE SHALL NOT EXCEED THE PAYMENT, IF ANY, RECEIVED BY MITEQ, INC. FOR THE UNIT OF PRODUCT OR SERVICE FURNISHED OR TO BE FURNISHED, AS THE CASE MAY BE, WHICH IS THE SUBJECT OF CLAIM OR DISPUTE. IN NO EVENT SHALL MITEQ, INC. BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES, HOWSOEVER CAUSED.

7. All matters regarding this warranty shall be interpreted in accordance with the laws of the State of New York and any controversy that cannot be settled directly shall be settled by arbitration in New York, New York in accordance with the rules then prevailing of the American Arbitration Association, and judgement upon the award rendered may be entered in any court having jurisdiction thereof.



MITEQ

MULTIPLIER DEPARTMENT

TEL.: (631) 439-9413
FAX: (631) 436-7430
E-MAIL: dkrautheimer@miteq.com

DATE _____

COMPANY _____

ADDRESS _____

CONTACT _____

TEL. _____

FAX _____

Please provide price, delivery and technical information for the following multipliers:

| SPECIFICATION PARAMETER | REQUIREMENT 1 | REQUIREMENT 2 | TYPICAL VALUES | |
|--|---------------|---------------|-----------------------|-------------------|
| | | | PASSIVE | ACTIVE |
| Input frequency (GHz) | | | | |
| Input power (dBm) | | | +10 | +10 |
| Input VSWR (maximum) | | | 2.5:1 | 2.5:1 |
| Input harmonics feeding multiplier (dBc) | | | -50 | -50 |
| Input harmonics rejection (gen. by multiplier) (dBc) | | | -15 | -50 (with filter) |
| Output frequency (GHz) | | | | |
| Output power (dBm, minimum) | | | -2 | +10 |
| Output power flatness at 25°C (dB) | | | ±1 (octave) | ±1.5 |
| Output VSWR (maximum) | | | 2.5:1 | 1.5:1 |
| Output harmonics (dBc) | | | - | -15 |
| Spurious rejection (nonharmonic related) (dB) | | | 60 | 60 |
| Conversion gain (dB) | | | - | 0 |
| Multiplier loss (dB) | | | 12 (octave) | - |
| DC voltage, current | | | - | +15 VDC, 250 mA |
| Connectors (in/out) | | | SMA female/SMA female | |
| Operating temperature (°C) | | | 0 to 50 | 0 to 50 |
| Quantity | | | | |
| Size (inches) | | | | |

Special requirements, such as output power variations over temperature and frequency, hermetic sealing, special testing/screening, or specific operating environment may be listed below:

PLEASE SEND ADDITIONAL INFORMATION ON THE FOLLOWING MITEQ PRODUCTS:

- Amplifiers
- Mixers
- Frequency Sources
- IF Signal Processing Components
- Integrated Assemblies
- SATCOM Products
- Switches



100 Davids Drive, Hauppauge, NY 11788
TEL.: (631) 436-7400 • FAX: (631) 436-7430
www.miteq.com

ADDITIONAL PRODUCTS FROM MITEQ

In addition to the products listed in this catalog, MITEQ manufactures a large variety of other microwave components, subsystems, and systems. A short synopsis of these products is presented below.

AMPLIFIERS -

GaAs FET DESIGNS TO 60 GHz

- Low-noise amplifiers
Moderate bandwidth (10% BW), with noise figures from 0.35 dB at L-band to 2.5 dB at 40 GHz and 6 dB at 60 GHz
Classical octave bands, with noise figures from 0.4 dB in the 1–2 GHz band and 2.5 dB in the 20–40 GHz band.
Multioctave and ultra-wideband designs, with noise figures from 1 dB at 2 GHz to 3 dB at 40 GHz
- Medium power amplifiers
Moderate to ultra-wideband designs with 33 dBm at 18 GHz, 18 dBm at 40 GHz
- Power amplifiers
Moderate band to octave designs with output power to 10 watts (linear)

OSCILLATORS/FREQUENCY SOURCES

- Crystal oscillators to 195 MHz, single or multiple crystal, moderate to high stability
- Crystal oscillator/multipliers to 40 GHz
- Voltage-tuned oscillators to 4 GHz
- Cavity-tuned oscillators to 6 GHz
- Coaxial resonator oscillators to 3.2 GHz
- Dielectric resonator stabilized oscillators (DROs) from 3–20 GHz
- Phase-locked oscillators, combine crystal-controlled oscillators with the above-listed free-running sources
- Frequency synthesizers to 50 GHz, singleloop or multiloop, with fine frequency resolution and low phase noise
- Frequency doublers to 60 GHz; passive, active with unity gain
- Frequency triplers and quadruplers, custom designs to 50 GHz

SIGNAL PROCESSING

RF AND MICROWAVE SIGNAL PROCESSING COMPONENTS (MIXER AND MIXER-RELATED PRODUCTS TO 50 GHz)

- Single-, double-, and triple-balanced mixers
Phase/amplitude matched sets
- Low spurious level mixer/preamps
- Multioctave image rejection mixer/IF amplifiers
- Single sideband and biphase modulators
- Integrated multifunction frequency conversion assemblies
- Low harmonic upconverter/modulators

RF AND MICROWAVE SIGNAL PROCESSING COMPONENTS (CONT.)

- Low 1/f noise phase detectors
- Ultra-high IP³ level mixers
- Low-noise front ends
- Solid state switches, one-to-six throw above 18 GHz
- Solid state attenuators
1–18 GHz in octave bands, current and voltage controlled linear models, analog and digitally controlled
- Switch matrixes
- Switch filter banks
- Custom integrated microwave assemblies including: block frequency converters, radar receiver front ends, and modulator subsystems to complete integrated receivers

IF SIGNAL PROCESSING COMPONENTS TO 3 GHz

- Voltage-controlled amplifiers
- Automatic gain-controlled (AGC) amplifiers
- Constant phase limiting amplifiers
- Discriminators
- Logarithmic amplifiers
- Extended range DLVA (to 18 GHz)
- I/Q processors

VIDEO SIGNAL PROCESSING COMPONENTS

- DC-coupled amplifiers to 2 GHz
- Audio distribution amplifiers
- Video distribution amplifiers

SATELLITE COMMUNICATION PRODUCTS

- Synthesized converters, 1.0 kHz and 125 kHz frequency step size
- Crystal-controlled converters
- Frequency translators
- 1:1 and 1:N redundant switchover systems
- Video exciters
- 1:1 and 1:2 redundant amplifier systems
- 70 MHz and 140 MHz variable IF delay and amplitude slope equalizers
- INMARSAT L- and C-band converters, pilot generators/receivers, translators
- Uplink power control units
- Receiver subsystems
- Integrated modules
- FM modulators
- FM demodulators
- Pressurized (weatherproof) and weather resistant enclosures
- Custom designed products

FREQUENCY MULTIPLIERS

ADDITIONAL FREQUENCY SOURCE PRODUCTS

FREE-RUNNING AND PHASE-LOCKED VOLTAGE-CONTROLLED OSCILLATORS

- Cavity and Coaxial Resonator Designs
 - Fundamental to 4 GHz
 - Multiplied to 40 GHz
- Crystal Oscillators to 195 MHz, Single or Multiple Crystal, Moderate to High Stability
- Cavity-Tuned to 6 GHz
- Coaxial Resonator to 3.2 GHz
- Octave Band L-C VCOs

FREE-RUNNING AND PHASE-LOCKED DIELECTRIC RESONATOR OSCILLATORS

- Fundamental Bipolar Based Designs to 12 GHz
- FET Designs to 25 GHz
- Coaxial and Microstrip Packages

FREQUENCY SYNTHESIZERS

- Phase-Locked Loop, Communication Band Synthesizers
- Single-Loop Fast Acquisition Synthesizers
- Octave Band YIG-Based Synthesizers

For additional information and technical assistance,
please contact Dave Krautheimer at (631) 439-9413.



D-213B

100 Davids Drive, Hauppauge, NY 11788
TEL.: (631) 436-7400 • FAX: (631) 436-7430
www.miteq.com