

MULTIBAND TO L-BAND BLOCK DOWNCONVERTERS

narda  **MITEQ**



FEATURES

- Automatic 5/10 MHz internal/external reference selection
- Three monitor control ports:
 1. Standard RS-485/RS-422 remote interface which can be substituted with RS-232
 2. RS-485/RS-422 control interface (J7) which can be configured to control an external HPA or as an alternate remote interface
 3. 10/100 Base-T Ethernet interface
- RF/IF signal monitor port
- 30 dB gain control
- Low phase noise
- 64 memory locations
- High frequency stability
- Summary alarm
- CE certification

OPTIONS

- Higher stability reference
- Remote RS-232

This series of band-switching block downconverters translates to L-Band. Local control is by a front panel keyboard and remote control is available through a remote interface. Up to 64 discrete band and attenuation settings may be programmed into a nonvolatile memory.



MULTIBAND TO L-BAND BLOCK DOWNCONVERTERS

DOWNCONVERTERS

INPUT FREQUENCY (GHz)	OUTPUT FREQUENCY (GHz)	LO FREQUENCY (GHz)	MODEL NUMBER
10.7 to 11.45	0.95 to 1.7	9.75	DNB-3B
11.45 to 12.2	0.95 to 1.7	10.5	
12.2 to 12.75	0.95 to 1.5	11.25	
10.95 to 11.7	0.95 to 1.7	10	DNB-3B-1
11.7 to 12.2	0.95 to 1.45	10.75	
12.2 to 12.75	0.95 to 1.5	11.25	
10.7 to 11.75	0.95 to 2	9.75	DNB-2B
11.7 to 12.75	0.95 to 2	10.75	
3.4 to 4.2	0.95 to 1.75	8.8/11.25	DNB-4B
10.7 to 11.45	0.95 to 1.7	9.75	
11.45 to 12.2	0.95 to 1.7	10.5	
12.2 to 12.755	0.95 to 1.505	11.25	
3.4 to 4.2	0.95 to 1.75	8.8/11.25	DNB-4B-1
10.95 to 11.7	0.95 to 1.7	10	
11.7 to 12.2	0.95 to 1.45	10.75	
12.2 to 12.75	0.95 to 1.5	11.25	
3.4 to 4.2	0.95 to 1.75	5.15*	DNB-4B-IN
10.7 to 11.45	0.95 to 1.7	9.75	
11.45 to 12.2	0.95 to 1.7	10.5	
12.2 to 12.755	0.95 to 1.505	11.25	
3.4 to 4.2	0.95 to 1.75	5.15*	DNB-4B-1-IN
10.95 to 11.7	0.95 to 1.7	10	
11.7 to 12.5	0.95 to 1.75	10.75	
11.955 to 12.755	0.95 to 1.75	11.005	

* Model includes frequency inversion

SPECIFICATIONS	DOWNCONVERTER
Frequency sense	No inversion, except DNB-X-IN C-Band inverting
Input characteristics	
Impedance	50 ohms
Return loss	20 dB minimum
LO leakage	-80 dBm maximum
Output characteristics	
Impedance	50 ohms
Return loss	18 dB minimum
Power output (P1 dB)	+10 dBm minimum
Transfer characteristics	
Gain at minimum attenuation	30 dB minimum
Image rejection	60 dB minimum
Level stability	±0.25 dB/day at constant temperature
Noise figure at min attenuation	15 dB maximum
Amplitude response	±0.5 dB/±40 MHz, ±2 dB over output band
Group delay	2 ns peak-to-peak maximum
Intermodulation distortion (third order)	With two 0 dBm output signals, 40 dBc minimum
Spurious outputs	
Signal-related	65 dBc minimum
Signal-independent	-70 dBm maximum
Gain adjustment	30 dB in 0.2 dB steps
Phase noise	See graph on page six
Frequency stability	±2 x 10 ⁻⁸ , 0 to 50 °C (higher stability options available), ±5 x 10 ⁻⁹ /day typical (fixed temperature after 24 hours on time)
Automatic reference configuration	External 5 or 10 MHz, +4 ±3 dBm. If external reference is below +1 dBm nominal, the converter will automatically lock to the internal reference.
Remote interface	RS-485/RS-422 user selectable and 10/100 Base-T Ethernet interface providing: Web-browser-based configuration, SNMP 1.0 configuration alarm reporting via SNMP trap, telnet access, password protection

MULTIBAND TO L-BAND BLOCK DOWNCONVERTERS

OPTIONS

Missing option numbers are not applicable for this product.

10. High-frequency stability reference

C. $\pm 2 \times 10^{-9}$, 0 °C to 50 °C,

1 $\times 10^{-9}$ /day typical (fixed temperature after 24 hours on time).

G. Self calibrating tracking reference with controlled slew rate. Internal reference tracks external reference and uses external reference to correct for aging of the internal reference. The internal reference changes frequency at a maximum rate of 0.06 ppm/second. When external reference is lost, the reference frequency is held at the previous value. Frequency stability on internal reference:

$\pm 5 \times 10^{-8}$, 0 °C to 50 °C, 1 $\times 10^{-9}$ /day typical (fixed temperature after 72 hours on time).

5 $\times 10^{-8}$ /year typical

H. Self calibrating tracking reference with controlled slew rate. Internal reference tracks external reference and uses external reference to correct for aging of the internal reference. The internal reference changes frequency at a maximum rate of 0.06 ppm/second. When external reference is lost, the reference frequency is held at the previous value. Frequency stability on internal reference: $\pm 2 \times 10^{-9}$, 0 °C to 50 °C, 1 $\times 10^{-9}$ /day typical (fixed temperature after 72 hours on time).

5 $\times 10^{-8}$ /year typical

17. Remote control

C. RS-232

Note: For literature describing local control (front panel) and remote control (bus protocols), refer to Narda-MITEQ Technical Note 25T055.

ACCESSORIES

Dedicated remote control panel.

Model Number RCTR-T055.

Provides remote control and status over a dedicated RS-485 bus.

GENERAL SPECIFICATIONS

PRIMARY POWER REQUIREMENTS

Voltage.....90 VAC to 250 VAC
 Frequency47 Hz to 63 Hz
 Consumption.....30 W typical

SUMMARY ALARM

Contact closure/open for DC voltage and/or LO alarm

PHYSICAL

Weight.....16 lb. [7.25 kg] nominal
 Overall dimensions.....19" [482.6 mm] x 1.75" [44.45 mm] panel x
 22" [558.8 mm] maximum (chassis depth 20" [508 mm])

Connectors

RFSMA female
 RF monitorSMA female
 IF.....N female
 IF monitor.....SMA female
 External referenceBNC female
 LO monitorSMA female
 Remote interfaceDEM-9S for RS-485, RS-422 and RS-232, RJ-45 female for Ethernet
 Summary alarmDE-9P
 Primary power inputIEC-320

ENVIRONMENTAL

Operating


Ambient temperature.....0 °C to 50 °C
 Relative humidity.....Up to 95% at 30 °C
 Atmospheric pressureUp to 10,000 feet

Nonoperating

Ambient temperature.....-50 °C to +70 °C
 Relative humidity.....Up to 95% at 40 °C
 Atmospheric pressureUp to 40,000 feet
 Shock and vibrationNormal handling by commercial carriers

MULTIBAND TO L-BAND BLOCK DOWNCONVERTERS

PHASE NOISE SPECIFICATIONS

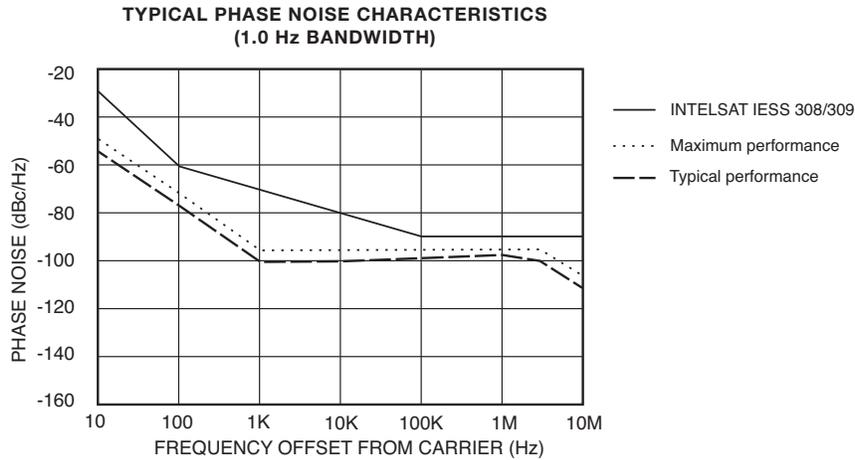

The material presented in this datasheet was current at the time of publication. Narda-MITEQ's continuing product improvement program makes it necessary to reserve the right to change our mechanical and electrical specifications without notice. If either of these parameters is critical, please contact the factory to verify that the information is current.

This material consists of Narda-MITEQ general capabilities information and does not contain controlled technical data as defined within the International Traffic in Arms (ITAR) Part 120.10 or Export Administration Regulations (EAR) Part 734.7-11.
D-288E/06.27.17

narda  **MITEQ**

435 Moreland Road

Hauppauge, NY 11788

Tel: 631-231-1700

Fax: 631-231-1711

Email: satcomsalesnm@nardamiteq.com

www.nardamiteq.com