LOW FREQUENCY BIAS TEE CHASSIS

FEATURES

- Frequency range up to 20 GHz
- Low cost
- Connectorized or drop-in style
- Hermetically sealed Kovar chassis

OPTION

- Other frequency bandwidths are also available

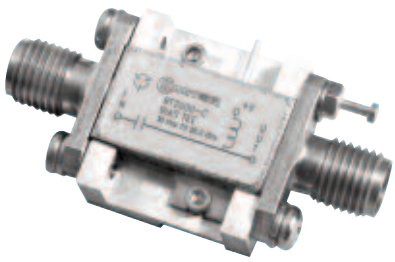

MODEL NUMBER	PACKAGE TYPE	FREQUENCY RANGE	INSERTION LOSS (≤dB)	VSWR IN/OUT	CURRENT (≤mA, Max.)
BT0200-C	AFS-430	kHz – 2 GHz	0.5	1.5:1	250
BT0400-C	AFS-430	kHz – 4 GHz	0.6	1.5:1	250
BT0600-C	AFS-430	kHz – 6 GHz	0.7	1.5:1	250
BT0800-C	AFS-430	kHz – 8 GHz	0.8	1.8:1	250
BT1200-C	AFS-430	kHz – 12 GHz	1	1.8:1	250
BT1800-C	AFS-430	kHz – 18 GHz	1.2	2:1	250
BT2000-C	AFS-430	kHz – 20 GHz	1.4	2:1	250

NOTE: See page 70 for outline.

MITEQ®
100 Davids Drive, Hauppauge, NY 11788
TEL.: (631) 439-9220 • FAX: (631) 436-7430
e-mail: components@miteq.com • www.miteq.com