



V-BAND UPCONVERTER

SPECIFICATION									
RF Frequency (GHz)	IF Frequency (GHz)	Translation Frequency	Model Number						
47.2 to 48.2 (RF ₁)	1.45 to 2.45 (IF ₁)	45.75 (LO1)	UPB4-W-49.3						
48.2 to 49.2 (RF ₂)	1.45 to 2.45 (IF ₂)	46.75 (LO2)							
49.2 to 50.2 (RF ₃)	1.45 to 2.45 (IF ₃)	47.75 (LO3)							
50.4 to 51.4 (RF ₄)	1.45 to 2.45 (IF ₄)	48.95 (LO4)							
FUNCTIONAL									
Input Characteristics									
Return Loss (50 ohms)	18 dB minimum								
Output Characteristics									
Return Loss	12 dB minimum								
Power Output (P1dB)	9 dBm minimum								
Signal Monitor	-20 dBc nominal								
Transfer Characteristics									
Gain	33 dB, ±3 dB at 23°C 30 dB minimum in 0.2 dB steps								
Gain Adjustment	25 dB on common RF output 5 dB on each independent input channel								
Gain Stability	±0.25 dB/day maximum at constant temperature, ±3 dB/ -20°C to +50°C								
Amplitude Response	±0.5 dB/40 MHz maximum, ±1 dB/1 GHz band								
Image Rejection	80 dB minimum								
Noise Figure at Minimum Attenuation	18.5 dB maximum each band independently at 23°C								
Group Delay	1.5 ns peak-to-peak maximum across any 500 MHz band								
Intermodulation Distortion (Third-Order)	With two in-band signals at 0 dBm output, third order intermodulation products are less than 34 dBc minimum at minimum attenuation								
Spurious Outputs									
Signal-Related (In-Band)	65 dBc minimum up to 0 dBm output								
Signal-Independent	-70 dBm maximum including LO leakage								
Phase Noise		See table below							
	MODEL	10	100	1K	10K	100K	300K	1M	10M
V-Band		-33	-63	-79	-84	-85	-87	-91	-109
Frequency Stability	±5 x 10 ⁻⁸ , -40°C to +60°C (higher stability options available), 5 x 10 ⁻⁹ /day typical (fixed temperature after 24 hours on time)								
Automatic Reference Configuration	External 5 MHz or 10 MHz, +4 ±3 dBm. If external reference is below +1 dBm nominal, the converter will lock to the internal reference.								
Remote Interface	10/100 Base-T Ethernet interface providing Web-browser based configuration, SNMP 1.0 configuration, alarm reporting via SNMP trap, telnet access, password protection and selectable RS-485/RS-422. Refer to L3Harris Narda-MITEQ Multi-Channel Technical Note for details.								
Indicator and Alarms									
LO Out-of-Lock	RED LED (front panel), Amber LED (for logged alarms), Summary alarm indicates: LO out-of-lock or DC voltage alarm								
Power ON Indicator	Green LED (front panel)								
Summary Alarm	Contact closure status for DC voltage and local oscillators, external mute input								
Note: All specifications at maximum gain and 23°C unless otherwise noted.									



This L3Harris Narda-MITEQ series of outdoor, antenna-mounted block upconverter is designed to cover simultaneously multiple wide bandwidth satellite transponders by accepting four independent IF inputs which are up converted into one wideband RF output.

A strong set of monitor and control functions support powerful remote control. A contact closure summary alarm is provided for fault monitoring. A continuously updated log of time-stamped records of activity is also provided.

AVAILABLE OPTIONS

Missing option numbers are not applicable for this product.								
Option 1A - High-Performance Stability								
Gain Stability	±0.25 dB/day maximum at constant temperature, ±2 dB peak-to-peak maximum/-40°C to +60°C ±1 dB peak-to-peak maximum/20°C to 35°C							
Option 1B - High Performance Spurious Outputs								
Spurious Outputs (In-Band)								
Signal-Related	65 dBc minimum up to 0 dBm output							
Signal-Independent	-75 dBm maximum							
Noise Spectral Density	-83.5 dBm/4 kHz maximum							
AM/PM Conversion (at 0 dB outut)	0.265°/dB maximum							
Option 1C								
High Performance Phase Noise (dBc/Hz maximum)								
OFFSET (Hz)								
<u>MODEL</u>	<u>10</u>	<u>100</u>	<u>1K</u>	<u>10K</u>	<u>100K</u>	<u>300K</u>	<u>1M</u>	<u>10M</u>
V-Band	-35	-74	-94	-105	-108	-109	-123	-130

PRIMARY POWER REQUIREMENTS

Voltage	100 VAC to 240 VAC (-10%, +6%)
Frequency	47 Hz to 63 Hz
Consumption	85 W typical

PHYSICAL

Weight	45 lb. [5.46 kg] nominal, 50 lb. [6.07 kg] maximum
Front Panel Connectors	
L-Band	N female
External Reference Input	SMA female with termination
Status/Control Interface	MS3116F14-18S for summary alarm, RS-422/RS-485 and redundancy
Remote Interface	RJ-45 female for Ethernet, RS-422/RS-485 available on status connector
Primary Power Input	FCI clipper series CL1M1102
RF-Band	WR-22 standard
RF-Band Monitor	1.85 mm female-compatible

ENVIRONMENTAL

Enclosure Rating	IP64
Operating	
Ambient Temperature	-40°C to +50°C
Atmospheric Pressure	Up to 10,000 feet
Non-Operating	
Ambient Temperature	-50°C to +70°C
Atmospheric Pressure	Up to 40,000 feet
Shock and Vibration	Normal handling by commercial carriers


KEY FEATURES

- > Weather resistant enclosure
- > Automatic 5/10 MHz internal/ external reference selection
- > 10/100 Base-T Ethernet and RS-485/RS-422 remote control
- > Superior phase noise below IESS-308/309 specification
- > 30 dB gain control
- > 32 memory locations
- > High-frequency stability
- > Summary alarm
- > Redundant AC power supply with power factor correction
- > CE mark

OPTIONS

- > Option 1A – High performance stability
- > Option 1B – High performance spurious outputs
- > Option 1C – High performance phase noise (dBc/Hz maximum)

OUTLINE DIAGRAM

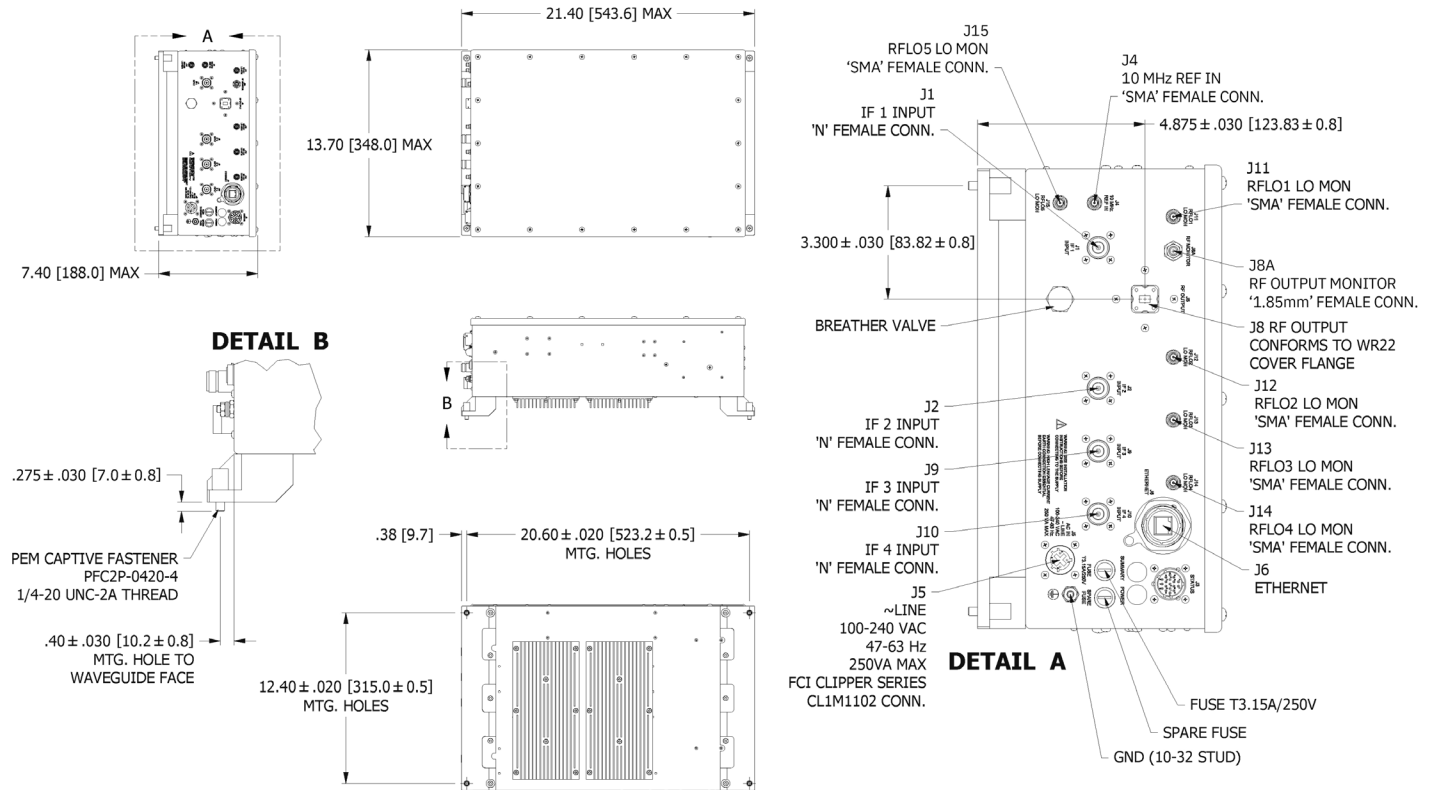

V-BAND FREQUENCY CONVERTER

V-Band Upconverters

© 2020 L3Harris Technologies, Inc. | 09/2020

This material consists of L3Harris Technologies general capabilities information and does not contain controlled technical data as defined within the International Traffic in Arms (ITAR) Part 120.10 or Export Administration Regulations (EAR) Part 734.7-11. D-421 REV A

L3Harris Technologies is an agile global aerospace and defense technology innovator, delivering end-to-end solutions that meet customers' mission-critical needs. The company provides advanced defense and commercial technologies across air, land, sea, space and cyber domains.



1025 W. NASA Boulevard
Melbourne, FL 32919
t 631.231.1700 | f 631.231.1711
satcomsalesnm@L3Harris.com