


2 TO 18 GHz IMAGE REJECTION OR I/Q MIXERS

MODELS: IRM0218LC1A, IRM0218LC1B, IRM0218LC1C AND IRM0218LC1Q

FEATURES





- RF/LO coverage 2 to 18 GHz
- IF operation DC to 0.5 GHz
- Conversion loss 8 dB typical
- Image rejection 20 dB typical

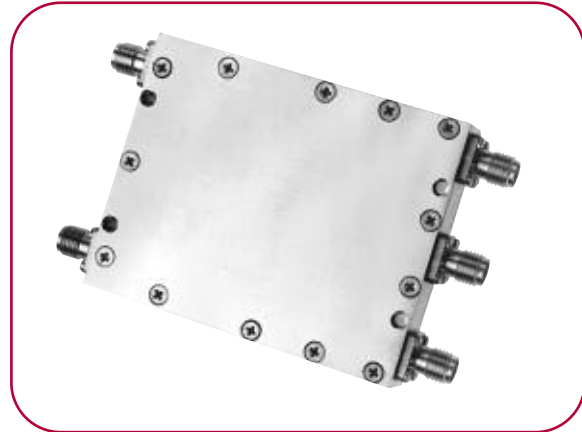

ELECTRICAL SPECIFICATIONS

INPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
RF frequency range		GHz	2		18
RF VSWR (RF = -10 dBm)		Ratio		3:1	
LO frequency range		GHz	2		18
LO power range	IRM0218LC1	dBm	+10	+12	+13
	IRM0218MC1	dBm	+13	+15	+16
	IRM0218HC1	dBm	+17	+18	+20
LO VSWR		Ratio		2.5:1	
TRANSFER CHARACTERISTICS	CONDITION	UNITS	MIN.	TYP.	MAX.
Conversion loss (Note 1)	RF > LO	dBm		8	11
	IRM0218LC1Q	dB		11	14
Single-sideband noise figure		dB		8.5	
Image rejection (Note 1)	RF < LO	dB	18	20	
LO-to-RF isolation		dB	18	20	
LO-to-IF isolation		dB		20	
Input power at 1 dB compression	IRM0218LC1	dBm		+6	
	IRM0218MC1	dBm		+10	
	IRM0218HC1	dBm		+15	
Input two-tone third-order intercept point	IRM0218LC1	dBm		+16	
	IRM0218MC1	dBm		+20	
	IRM0218HC1	dBm		+25	
Amplitude balance	IRM0218LC1Q	dB			±1.5
Phase balance	IRM0218LC1Q	Degrees			±15
Truth table	IRM0218LC1Q		PORT	RF < LO	RF > LO
			I	0	-90
			Q	-90	0
OUTPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
IF frequency (image rejection mode)	IRM0218LC1A	MHz	20		40
	IRM0218LC1B	MHz	40		80
	IRM0218LC1C	MHz	100		200
IF frequency (QIFM, I/Q demodulator mode)	IRM0218LC1Q	MHz	DC		500
IF VSWR (IF = -10 dBm)		Ratio		1.5:1	

IRM0218LC1B TYPICAL TEST DATA

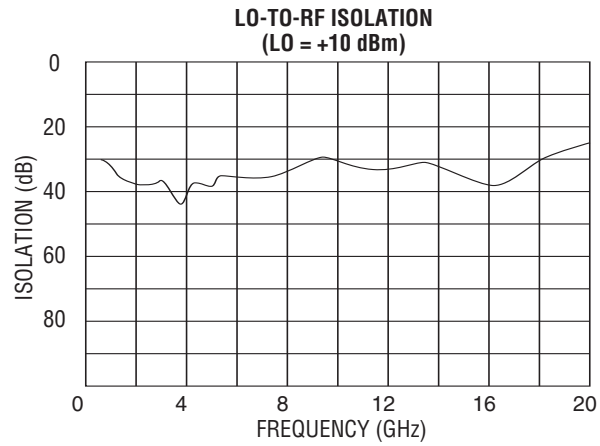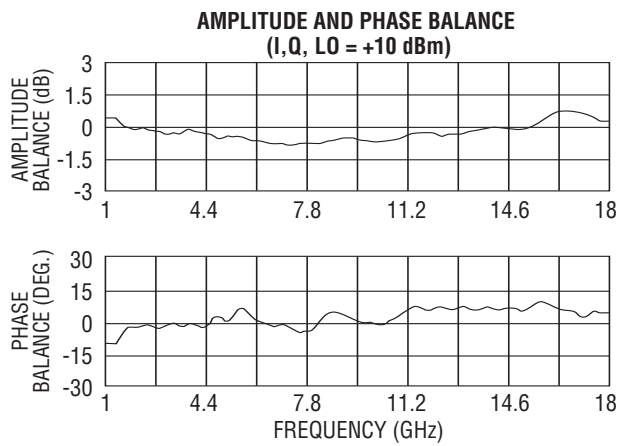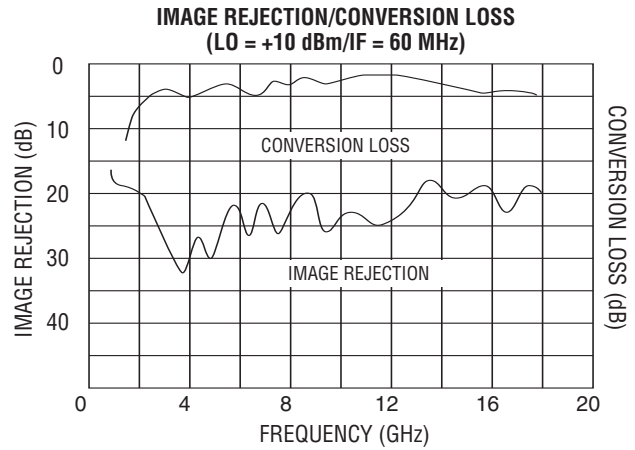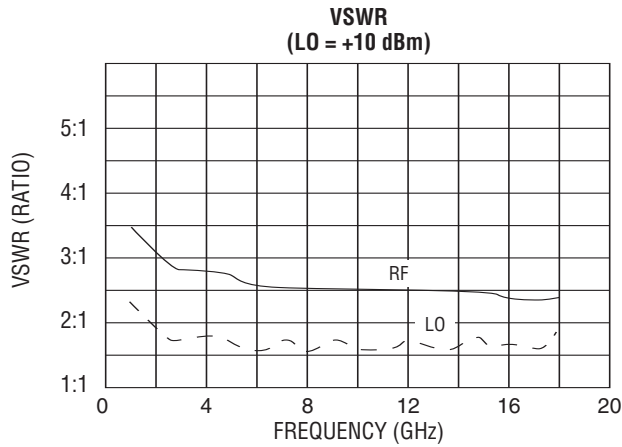

MAXIMUM RATINGS



Specification temperature..... +25°C
 Operating temperature -54 to +85°C
 Storage temperature -65 to +125°C

GENERAL NOTES

- Standard catalog unit aligned and tested for guaranteed RF > LO performance. RF < LO guaranteed performance is available, please contact MITEQ.
- For upconverter applications, please order Model Number SSM0218 Series. See Modulator section of catalog.

NOTE: Test data supplied at 25°C; conversion loss, LO-to-RF isolation, image rejection (IF Options A, B and C), phase and amplitude balance (IF Option Q).

OUTLINE DRAWINGS

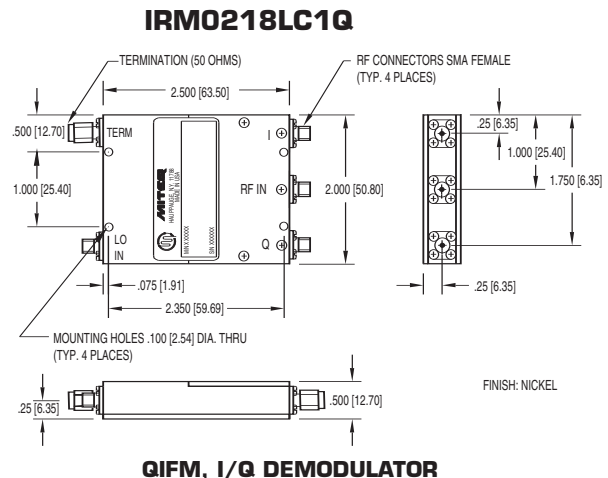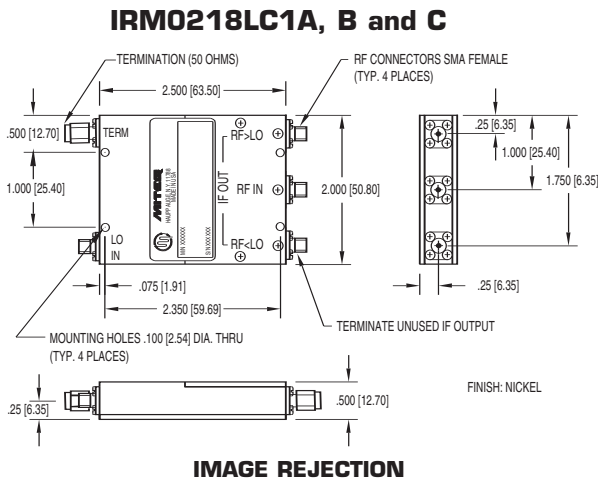

NOTE: All dimensions shown in brackets [] are in millimeters.

