



| DASH NO. | APPLICATION | | REVISIONS | | | |
|----------|-------------|---------|-----------|-----------------------|----------|-----------|
| | NEXT ASSY | USED ON | LTR | DESCRIPTION | DATE | APPROVED |
| | | | C | REVISED PER ECN 10733 | 12/16/08 | L. Kammer |

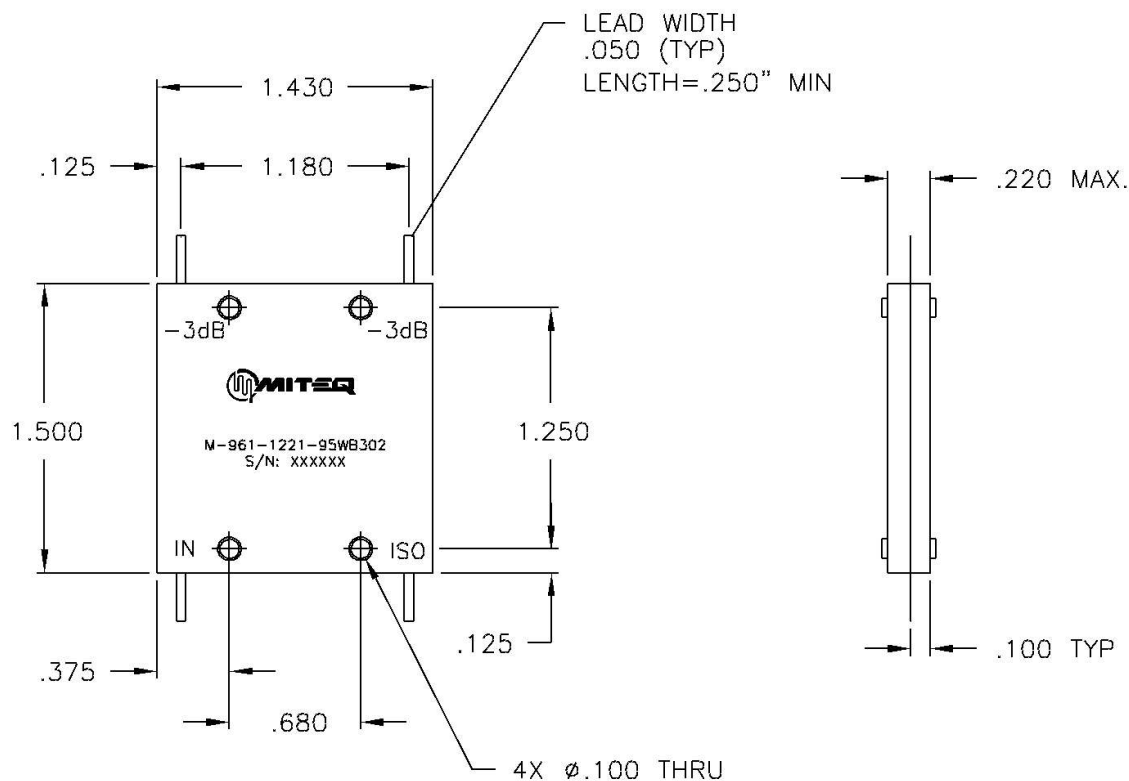

NOTES:

1. MECHANICAL RELIEF FOR EYELET PROJECTION IS NECESSARY.
(EYELET PROJECTION = 0.03", DIAMETER = 0.22" MAX)
2. COUPLERS ARE RATED AT 100% OF POWER TO 85°C BASE PLATE
3. TOLERANCE: ± 0.020 " UNLESS SPECIFIED.
4. FINISH: TRIVALENT CHROMATE CONVERSION PER MIL-DTL-5541F, TYPE II, CLASS 3.

| | | | | | |
|--|---------------------------|------------------|---|--------------------------|--------|
| ALL PAGES ARE OF ORIGINAL ISSUE (A) EXCEPT AS NOTED. | CONTR NO. 12D001 | |  100 Davids Drive, Hauppauge, New York 11788 | | |
| | PREP BY W. HURST | DATE 11/29/04 | | | |
| | CHKD BY L. Kammer | DATE 02/17/09 | HYBRID COUPLER M-961-1221-95WB302 960-1220 MHz 500 WATT 90° COUPLER | | |
| | PROJ ENGR W. Davidsson | DATE 02/17/09 | | | |
| | APPROVAL (PROJ) | | SIZE A | CODE IDENT. NO. 33592 | 156484 |
| | APPROVAL (GOVT) | | SCALE | REV. C | |
| | | | SHEET 1 OF 1 | | |