

Variable Attenuators



4-8 GHz

Broadband Variable Attenuator

- Flat Frequency Response
- Smooth Continuous Operation Over Full Frequency Range

Specifications


Type N, 4 to 8 GHz

FREQUENCY RANGE (GHz)	MODEL	ATTENUATION (dB)	POWER INPUT		VSWR (max.)	INSERTION LOSS (dB max.)	FREQUENCY SENSITIVITY (dB)	WEIGHT (max.)	
			AVERAGE (W max.)	PEAK (kW max.)				oz.	gr.
4-8	788FF	20	10	5	1.5	0.5	±2.5	16	454

NOTES:

- Connectors are Type N stainless steel.
- All units are supplied with female input and output connectors.
- Type N male connector(s) available on a custom order basis.

Outline Drawing

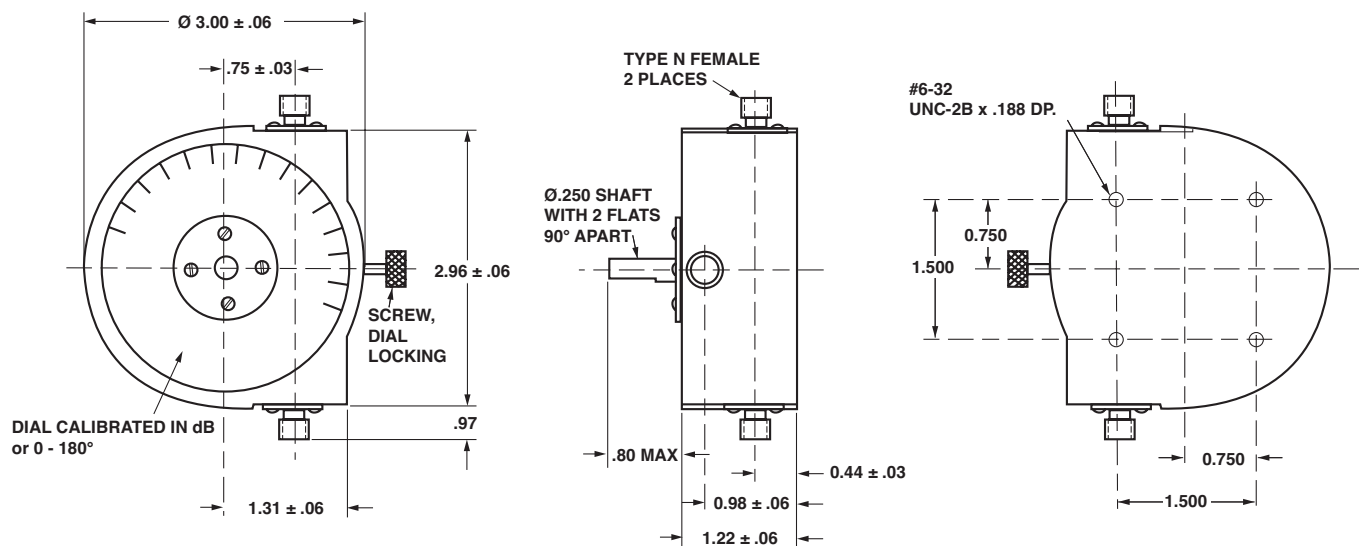

Dimensions in inches, unless otherwise specified.

